

Gibson, L.T. (2010) Volatile aldehydes in libraries and archives. *Atmospheric Environment*, 44 (17). pp. 2067-2073. ISSN 1352-2310

<http://strathprints.strath.ac.uk/18738/>

This is an author produced version of a paper published in *Atmospheric Environment*, 44 (17). pp. 2067-2073. ISSN 1352-2310. This version has been peer-reviewed but does not include the final publisher proof corrections, published layout or pagination.

Strathprints is designed to allow users to access the research output of the University of Strathclyde. Copyright © and Moral Rights for the papers on this site are retained by the individual authors and/or other copyright owners. You may not engage in further distribution of the material for any profitmaking activities or any commercial gain. You may freely distribute both the url (<http://strathprints.strath.ac.uk>) and the content of this paper for research or study, educational, or not-for-profit purposes without prior permission or charge. You may freely distribute the url (<http://strathprints.strath.ac.uk>) of the Strathprints website.

Any correspondence concerning this service should be sent to The Strathprints Administrator: eprints@cis.strath.ac.uk

Title: Volatile Aldehydes in Libraries and Archives

Authors: Ann Fenech¹, Matija Strlič^{1*}, Irena Kralj Cigić², Alenka Levart³, Lorraine T. Gibson⁴, Gerrit de Bruin⁵, Konstantinos Ntanos⁶, Jana Kolar⁷, May Cassar¹

Affiliations: ¹ University College London, Centre for Sustainable Heritage, The Bartlett School of Graduate Studies (Torrington Place site), Gower Street, London WC1E 6BT, UK

² University of Ljubljana, Faculty of Chemistry and Chemical Technology, Aškerčeva 5, 1000 Ljubljana, Slovenia

³ University of Ljubljana, Biotechnical Faculty, Jamnikarjeva 101, 1000 Ljubljana, Slovenia

⁴ Department of Pure and Applied Chemistry, WestCHEM, University of Strathclyde, Glasgow G1 1XL, UK

⁵ Nationaal Archief, P.O. Box 90520, 2509 LM, The Hague, The Netherlands

⁶ National Archives, Kew, Richmond, Surrey, TW9 4DU, UK

⁷ National and University Library, Turjaška 1, 1000 Ljubljana, Slovenia

*Corresponding Author: Matija Strlič

E-mail: m.strlic@ucl.ac.uk

Abstract

Volatile aldehydes are produced during degradation of paper-based materials. This may result in their accumulation in archival and library repositories. However, no systematic study has been performed so far. In the frame of this study, passive sampling was carried out at ten locations in four libraries and archives. Despite the very variable sampling locations, no major differences were found, although air-filtered repositories were found to have lower concentrations while a non-ventilated newspaper repository exhibited the highest concentrations of volatile aldehydes (formaldehyde, acetaldehyde, furfural and hexanal). Five employees in one institution were also provided with personal passive samplers to investigate employees' exposure to volatile aldehydes. All values were lower than the presently valid exposure limits.

The concentration of volatile aldehydes, acetic acid, and volatile organic compounds (VOCs) in general was also compared with that of outdoor-generated pollutants. It was evident that inside the repository and particularly inside archival boxes, the concentration of VOCs and acetic acid was much higher than the concentration of outdoor-generated pollutants, which are otherwise more routinely studied in connection with heritage materials. This indicates that further work on the pro-degradative effect of VOCs on heritage materials is necessary and that monitoring of VOCs in heritage institutions should become more widespread.

Keywords: Air Quality, Health and Safety, Indoor Emission, Paper Degradation, VOC

1. Introduction

Atmospheric pollutants are known to negatively affect human health (Bernstein et al., 2004; Manahan, 1999), but they also affect the permanence of materials (Kucera and Fitz, 1995). The latter is of particular concern in heritage institutions, where monitoring of traffic-generated pollutants is routinely performed as they became of central interest several decades ago (Thomson, 1965; Grzywacz, 2006). SO₂, NO_x, and O₃ are known to be the main externally generated pollutants causing heritage material degradation (Camuffo et al., 2001; Camuffo et al., 1999). With the decline of concentrations of traffic-generated pollutants as a result of strict environmental regulations in the last decade, in heritage institutions the focus is slowly shifting towards indoor-generated pollutants, particularly organic acids (Ryhl-Svendsen and Glastrup, 2002; Schieweck et al., 2005).

Typical indoor-generated pollutants, also found in libraries and archives, are volatile organic compounds (VOCs) such as organic acids including acetic and formic acid (Blades et al., 2000; Tétreault, 2003) and aldehydes, including acetaldehyde and formaldehyde (Salthammer, 2010). A variety of VOCs are known to be emitted from paper and other cellulose-based materials during degradation (Emsley and Stevens, 1994; Lattuati-Derieux et al., 2004; Lattuati-Derieux et al., 2006; Dupont et al., 2007; Strlič et al., 2007; Ramalho et al., 2009). The resulting VOC emission patterns are known to be complex (Strlič and Kolar, 2008), however, a number of volatile organic compounds were recently identified as specific degradation markers using material degradomics (Strlič et al., 2009).

Moreover, some of the identified VOCs (aldehydes and organic acids) could potentially lead to accelerated degradation of collection materials (Dupont and Tétreault, 2000) if the air exchange rate is not sufficient to remove the emitted VOCs. Additionally, there is limited information on micro-climates inside archival boxes (Dupont and Tétreault, 2000; Wise et al., 2005), particularly in relation to the migration of pollutants into and out of the boxes. So far, most analyses of VOCs in museum environments focussed on measurements of organic acids (Gibson et al., 1997; Srivastava et al., 2000; Ryhl-Svendsen and Glastrup, 2002) and a method development for formaldehyde determination using passive samplers was described (Gibson et al., 2008).

Conventional methods for measuring VOCs involve active sampling, where a sampling pump is used to pull air through a suitable sorbent (Martin and Blades, 1994; Grzywacz and Tennent, 1994; Dupont and Tétreault, 2000; Schieweck et al., 2005; Gibson et al., 2008). The collected analytes are commonly determined by chromatographic analysis after they

are removed from the sorbent by thermal desorption or solvent extraction. Common collection times for active sampling are either 15 min periods, to determine the short-term exposure limit (STEL), or 8 h for the time-weighted average (TWA) concentration. Increased periods of active sampling can be performed. However it is not always practical to leave pumps running overnight when longer-term averages are needed. In such situations, passive sampling methods are often the preferred method of choice as they typically involve sampling periods of between 7 and 28 days (Gibson et al., 1997; Bruno et al., 2008; Caselli et al., 2009). This longer sampling period is particularly suited to museum studies where a short term sampling measurement might not necessarily reflect the average pollutant concentrations surrounding objects held in enclosed spaces for many years.

This is the first systematic study of volatile aldehydes in institutions housing paper-based collections. The deployment of passive samplers at various locations in four institutions allowed for comparisons of aldehyde concentrations between and within institutions. Formaldehyde, acetaldehyde, furfural and hexanal were the major volatile aldehydes investigated. By comparing the data with health and safety regulations and with the potential effects of the pollutants on heritage materials, the need for corresponding guidelines in archives and libraries could arise. However, further work is needed to understand the effect of volatile aldehydes on the stability of heritage materials.

2. Experimental

2.1 Monitoring Locations

Ten different locations in four libraries and archives across Europe were selected: Nationaal Archief, The Hague (NA) in the Netherlands, St. Paul's Cathedral, London (Wren) and The National Archives, Kew (TNA) in the UK, and the National and University Library, Ljubljana (NUL) in Slovenia. The selection was driven by the need to have as different library and archival environments included in the study as possible, not only from the viewpoint of environmental management, but also from the viewpoint of the stored materials, size, and loading with archival/library material. A description of the locations where sampling was performed is in Table 1. Similarly, as the average storage microenvironment was of interest rather than a detailed analysis of the possible effects, the boxes monitored at TNA were of various geometries and variously packed with archival materials. The TNA repository environment is maintained at conditions prescribed by the relevant standard (BS5454:2000). RH and temperature were measured in the environment and in the boxes and were the same during the experiments: 17-20 °C and 50-60% RH.

Despite the variety of environments, it turned out that more detailed description of the repositories was not necessary.

Table 1: Description of locations sampled in the Nationaal Archief, The Hague (NA), St. Paul's Cathedral, London (Wren), The National Archives, Kew (TNA), and National and University Library of Slovenia, Ljubljana (NUL). Details on measurement locations and the respective analytes are provided.

Location		Description		Analytes
NA	Repository	Air-Filtered	Both the air entering from outside and the re-circulated air (ca. 85%) are purified using particulate filters, permanganate-based chemisorbents and activated charcoal filters before entering the repository.	VA*
		Non-Filtered	Ventilated, but not filtered. Re-circulation: 85%.	VA
NUL	Repository	Old prints	Old prints repository, non-ventilated, non-filtered.	VA
		Modern 1	Modern prints repository (denoted '700.000'), non-ventilated, non-filtered.	VA
		Modern 2	Modern prints repository (denoted '490.000'), non-ventilated, non-filtered.	VA
		Newsprint	Newsprint repository, non-ventilated, non-filtered.	VA
Wren	Outside Repository	Nave	Main Cathedral nave, sampling was carried out at the Triforium level above the entrance (Western façade), non-ventilated, non-filtered.	VA
		Triforium	Level located above the Southern aisle, non-ventilated, non-filtered. Sampling was carried out in the corridor opposite Library entrance.	VA
	Repository	Library	Historic library/reading room, non-ventilated, non-filtered, low loading ratio. The only repository environment with oak shelving, in contrast with other repositories with metal shelving. Entry from the Triforium.	VA
TNA	Repository	Repository	Repository ventilated with 70% re-circulated air. Air flow streams are pre-filtered for particulates (but not for pollutants). Approximately 3.2 air exchanges per hour (outdoor and re-circulated air) occur. Sampling of the repository was carried out close to the archival boxes at heights which were half-way the height of the shelving units.	VA, acetic acid, SO ₂ , NO _x , O ₃ , tVOCs
		Box	Cardboard archival boxes located in the repository of different geometries (without holes) and materials were studied. Three boxes were sampled for each of tVOCs, NO _x , SO ₂ and O ₃ , while nine boxes were studied for acetic acid and ten for volatile aldehydes (passive sampling). Each box was only sampled for one of these parameters. Box volumes were 5-20 L.	VA, acetic acid, SO ₂ , NO _x , O ₃ , tVOCs
	External	Environment	The environment external to the repositories was monitored in a location on the roof of the building housing the repository.	SO ₂ , NO _x , O ₃ , tVOCs

*VA: volatile aldehydes – formaldehyde, acetaldehyde, hexanal, furfural.

Personal SKC samplers were also given to five employees at the NA:

- Two repository workers: 15 h per week in repository
- A researcher: 20 h per week, 12 h of which in repository
- An employee working in distribution
- An employee working in repacking

Other workers do not work in repositories, but may get in contact with paper-based materials either in the office, distribution or repacking.

The personal samplers were worn and exposed by the workers during working hours, then closed, placed in resealable bags and stored overnight at 4 °C, daily, for four weeks and the total exposure time was calculated.

2.2 Monitoring of Volatile Aldehydes

2.2.1 Determination of Aldehydes Using SKC Passive Samplers

SKC Umex100 formaldehyde samplers (SKC, Blandford, UK) were supplied and used as received, for determination of formaldehyde, acetaldehyde, hexanal and furfural. The samplers, which contain a solid support impregnated with 2,4-dinitrophenylhydrazine (DNPH) that reacts with aldehydes to form their corresponding hydrazones, were exposed to the environment for 7 days to collect any aldehydes in the test environment. Blanks (unopened samplers) were positioned in the vicinity of the samplers measuring the repository environments.

After sampling, the aldehyde derivatives were eluted from the samplers using 10 mL of acetonitrile. Solutions were analysed by reverse-phase high performance liquid chromatography (Waters Alliance 2690 separations module equipped with 2487 Dual wavelength absorbance detector; software: Millenium) using a Phenomenex Gemini C18 column with dimensions of 250 mm × 4.6 mm × 5 µm). Two solutions were used for gradient elution: Solution A contained 45% acetonitrile and 55% acetic acid in water (0.2% v/v); Solution B contained 100% acetonitrile. Starting conditions used 100% of Solution A for 10 min then a linear gradient was applied over 30 min until the eluent contained 10% Solution A and 90% Solution B. This eluent mix was held for a further 15 min. The eluent flow rate was 1 ml/min. Spectrophotometric detection of the DNPH derivatives was performed at 365 nm and quantification was carried out using calibration curves for standard hydrazone solutions (T011/IP-6A Aldehyde/Ketone-DNPH, supplier: Supelco, Bellefonte PA, USA) of each corresponding aldehyde. Linear least square regression was used to calculate sample concentrations ($R^2 > 0.9995$).

Concentrations of formaldehyde (in vppb) in the air were calculated according to SKC Operating Instructions (SKC, 2007). However, the 7-day sampling rate of 20.4 mL/min is given for formaldehyde. For other aldehydes, the adjusted sampling rates were estimated according to sampling rate data made available by Radiello (IRCCS, 2006). Despite the

different geometries of SKC and Radiello samplers, the sampling ratios for different compounds vs formaldehyde, for the two geometries, were considered to be comparable. The ratios calculated as adjustment factors were as follows: 0.8 for acetaldehyde, and 0.2 for furfural and hexanal, relative to the sampling rate for formaldehyde, for the SKC sampling geometry. While there are no sampling rates available for furfural, we used the correction factor 0.2, by analogy with other aldehydes of similar molecular weight.

Standard deviation was always calculated based on the results obtained from three samplers exposed in the same location (repository), except when these were used as personal samplers, where only one sampler was worn by each member of personnel, or placed in boxes, where one sampler per box was used and the values from different boxes were averaged. Care was taken to open the boxes as little as necessary to insert the samplers. In repositories, the samplers were placed on empty shelves in the middle of the repository.

2.2.2 Determination of Hexanal Using Tenax Desorption Tubes

To determine the concentration of hexanal in air, thermal desorption tubes filled with Tenax TA were used as passive samplers (Gradko, Winchester, UK) and deployed for one week in various locations. Other volatile aldehydes of interest in the study (formaldehyde, acetaldehyde, furfural) cannot be determined using this sampling method. The analyses were performed by the same company as a commercial service. Three tubes were used at each location and the measured hexanal concentrations were averaged over the three tubes. The locations were the same as for SKC samplers allowing for direct comparisons.

Cross-validation of the results obtained by using SKC passive samplers and Tenax TA desorption tubes for hexanal showed a satisfactory correlation, $y = (0.80 \pm 0.04)x - (0.14 \pm 0.04)$, $R^2 = 0.93$; where x = Tenax tube results, y = SKC sampler results. The average RSD of the Tenax method was 23% and that of the SKC method 10%. Despite the indicated systematic error due to the intercept not being 0, this indicates that the SKC sampling method with liquid chromatographic analysis gives comparable results to the accredited method.

2.3 Monitoring of Nitrogen Oxides, Ozone and Sulfur Dioxide

Sulfur dioxide (M100), ozone (M400) and nitrogen oxide (M200, all Teledyne API, San Diego, USA) active analysers were used for determination of the respective pollutants. The atmosphere inside and outside the repository at the National Archives, Kew, UK was

monitored continuously for a week, with readings recorded in 15 min intervals, and daily averages were calculated.

Inside the boxes (after having made a cut in the box and sampled without opening it), the microenvironments were sampled for one parameter only per box (either NO_x, O₃ or SO₂, cf. Table 1). The values obtained after the readings stabilised (approximately 30 s), were averaged and the standard deviation was calculated. Due to the pump flow of 500 mL/min, the readings slowly decreased after 2 min, which is when the measurements were discontinued.

2.4 Monitoring of tVOCs

A ppbRAE 3000 (10.6 eV lamp; RAE Systems, San Jose, USA) portable continuous VOC monitoring instrument was used to measure total VOC (tVOC) concentration. The instrument is calibrated against the calibration gas isobutylene, therefore, all measurements express values of tVOCs in ppb of the calibration gas. tVOCs do not include formaldehyde and acetic acid as VOCs with ionisation energy higher than 10.6 eV cannot be detected using this instrument.

Continuous monitoring at the National Archives (Kew, UK) repository was carried out for a week and readings were taken at 15 min intervals. Microenvironments inside boxes (cf. Table 1) were monitored as described in 2.3 for other pollutants.

2.5 Monitoring of Acetic Acid

Passive acetic acid sampling tubes were prepared and deployed together with blanks at the TNA (cf. Table 1). They were then analysed according to the established method (Gibson et al., 1997). Dimethoxyethane replaced glycerol as the wetting agent during impregnation of filter paper discs, together with 1 M potassium hydroxide. This disc was placed in a 7.1 cm long/1.1 cm diameter polymethylmethacrylate tube and exposed to the environment for 40 days. The obtained extracts were then analysed using ion chromatography.

3. Results and Discussion

3.1 Comparison of Aldehyde Concentrations in Different Institutions

SKC samplers were used to determine the concentration of aldehydes at several locations in four institutions: NA, NUL, Wren and TNA (Table 1). The results obtained are shown in Figure 1.

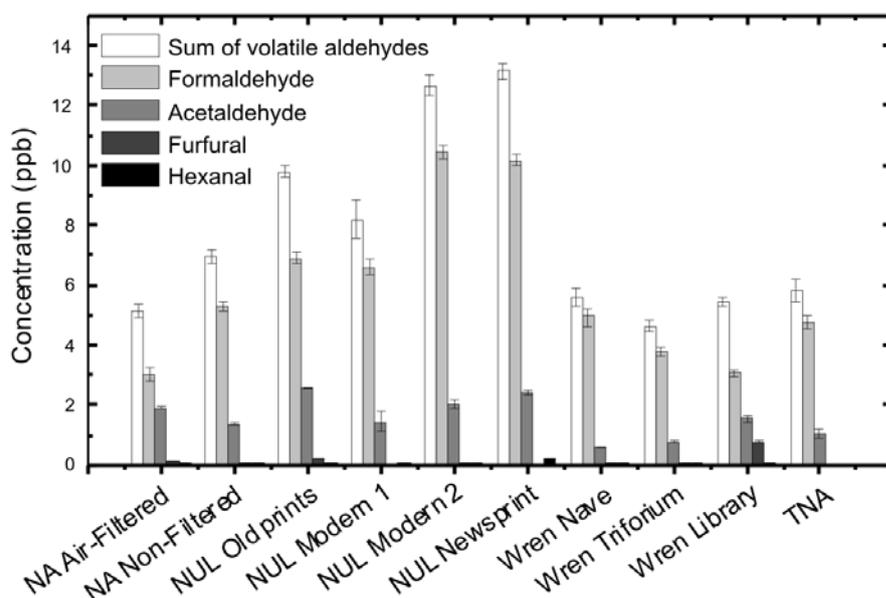


Figure 1: Concentrations of aldehydes in various repositories as determined using SKC samplers. The error bars represent standard deviation for three parallel determinations.

3.1.1 The Repositories

Two different repositories were investigated at the NA. The 'NA Air-filtered' repository had a lower sum concentration of the monitored aldehydes (5.1 ± 0.2 ppb) than the 'NA Non-filtered' repository (7.0 ± 0.2 ppb). However, a comparison of the individual aldehydes shows that while the concentration of formaldehyde was statistically significantly lower in the repository with air filtration (filtering both incoming outdoor and indoor air) than in the one without, acetaldehyde concentrations were slightly higher. In the repository at TNA, the concentration of volatile aldehydes was quite similar to that found at NA. Both at NA and at TNA, the repositories are ventilated, with high recirculation (Table 1).

Compared to other locations, aldehyde concentrations at NUL were the highest, 13.1 ± 0.3 ppb, particularly in the 'NUL Newsprint' repository and in the 'NUL Modern 2' repository. Newsprint paper and many contemporary papers may contain high amounts of lignin (Micales and Skog, 1997, Goho, 2004), which leads to higher VOC emissions from these papers (Strlič et al., 2009). None of the NUL repositories are ventilated.

In contrast with other repositories, Wren Library is a historic library with the fabric and fittings completed in 1709, with approximate dimensions of 12 x 12 x 16 m with oak shelving along walls on two levels, which represents a significantly lower load per volume compared to contemporary library and archival repositories. The shelving is made of oak,

which, as a lignocellulosic material probably contributes to the observed high concentration of furfural, while formaldehyde concentration is comparable to that at 'NA Air-Filtered'. Measurements were also carried out in the Triforium, which is adjacent to the Library, and in the large open Nave, which connects with the Triforium. Formaldehyde concentrations slightly increased from the library to the Nave while the concentrations of others decreased. Overall, the concentrations of volatile aldehydes at Wren library were the lowest.

All the different locations still exhibit relatively similar concentrations of formaldehyde, with 5.3 ± 2.6 ppb being the average value over all locations measured in all repositories. While not measured, it is highly interesting that any differences in terms of loading ratios, repository sizes, air exchange and filtration and building materials (particularly in the case of St. Paul's cathedral), do not lead to major differences in concentrations of volatile aldehydes, especially between the NA, TNA and Wren locations.

The observed elevated concentrations in NUL could be the consequence of the absence of ventilation. However, since all the NUL repositories are non-ventilated, the stored library materials must also be of importance, particularly in the 'NUL Newsprint' repository, where the highest concentrations were found. In a recent study, the emission of formaldehyde from degrading paper was found to be almost constant over 30 days of accelerated ageing of two types of papers ($125 \pm 22 \text{ ng g}^{-1} \text{ h}^{-1}$ and $685 \pm 118 \text{ ng g}^{-1} \text{ h}^{-1}$; Ramalho, 2009). Archival and library collections can thus be regarded as a stable source of volatile aldehydes. The higher emission rate of formaldehyde measured by Ramalho et al. was for lignin-containing paper, such as the one contained in newsprint and much of contemporary paper contained in 'NUL Modern 1' and 'NUL Modern 2'.

On the other hand, recent research has shown that paper emits reactive oxygen species, such as H_2O_2 (Strlič, 2010), which could additionally affect microenvironments and lead to removal of volatile aldehydes. Formaldehyde is known to be reactive and oxidises to formic acid (the rate being dependant on environmental conditions; Raychaudhuri and Brimblecombe, 2000). It has an outdoor atmospheric half-life of less than one day (Atkinson, 2000), although this value will be much higher indoors, in the absence of NO_2 , O_3 , reactive oxygen species and sunlight. This indicates the possibility of formaldehyde reaching a steady state concentration in library and archival environments, depending on environmental conditions (temperature, relative humidity, ventilation rate) and, to an extent, on the type of stored materials. In other similar situations, similar quasi steady-state concentration of formaldehyde and other VOCs has been identified (Brown, 2002).

3.1.2 Archival Box Microenvironments

The microenvironment inside archival boxes is also of major interest as boxes represent a physical barrier to migration of compounds. Volatile aldehydes were measured in a number of archival material-filled cardboard boxes at TNA (Table 1). Archival cardboard boxes of various sizes, but high loading ratios (>50%), and filled with archival folders containing materials of various composition were studied in order to obtain an average picture.

In order to be better able to compare microenvironments in boxes with the repository environment, we measured other pollutants in addition to aldehydes: O₃, NO, NO₂, SO₂, tVOCs, and acetic acid. Details on the number of samples are available in Table 1. A cut was made into boxes only in order to allow for the tubing to be inserted during active sampling but not bigger in order not to disrupt or dilute the atmosphere inside the box. The averaged readings obtained for measurements taken inside and outside the repository (externally to the building, 'External Environment'), as well as inside boxes are shown in Figure 2.

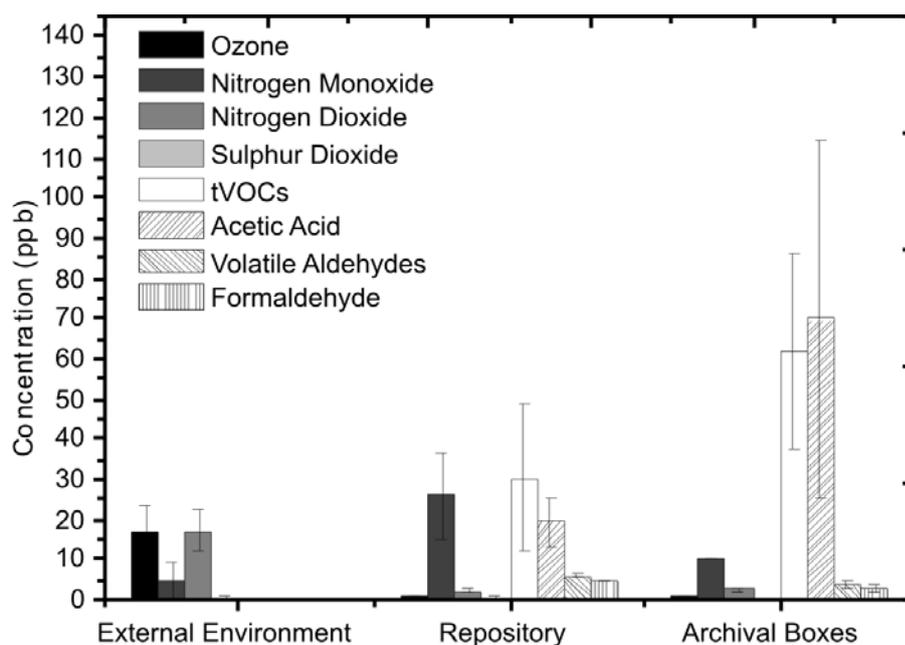


Figure 2: Concentrations of pollutants inside and outside the TNA repository and inside archival boxes at TNA. No measurements of volatile aldehydes and acetic acid were taken outside the repository. The error bars represent standard deviation. For O₃, NO, NO₂ and SO₂, and tVOCs the values for the 'External Environment' and the 'Repository' represent daily averages and for 'Archival Boxes' they represent short-term averages; acetic acid passive samplers were exposed for 40 days, the ones for aldehydes for a week. Cf. Experimental for details.

As expected, the major pollutants outside the repository were the outdoor-generated O₃, NO and NO₂. Even though there is no major traffic close to the TNA, a typical diurnal urban pollution pattern (Manahan, 1999) was determined. Inside the repository, their

concentration (except that of NO) was lower than outside which is in line with other studies (Drakou et al., 1998, Chan, 2002, Ekberg, 1996), and is the result of reaction and removal through absorption into material surfaces. NO₂ disproportionation in aqueous surfaces may also lead to production of HONO and HNO₃, thus posing an additional threat to library and archival materials (Wainman et al., 2001). The concentrations of outdoor-generated pollutants was very low inside archival boxes (10 ppb NO, 2.5 ppb NO₂, 0.7 ppb O₃), indicating that the boxes provide a degree of protection from these pollutants.

A comparison was also made for volatile organic compounds. No significant concentration of tVOCs was found in the external environment. This is in contrast to the situation inside the repository (~30 ppb) and even higher concentrations of tVOCs were found inside the boxes (~60 ppb). Using passive sampling we further investigated the concentrations of acetic acid and aldehydes, inside and outside the boxes. While the concentration of aldehydes inside the repository and inside the boxes was quite similar, the situation was different for acetic acid which was found to be much more abundant inside the boxes than in the repository.

A comparison of the measurement uncertainties is also of interest. Those of traffic generated pollutants are very low compared to those of volatile aldehydes, of tVOCs and of acetic acid. This indicates that traffic generated pollutant concentrations inside boxes are unaffected by the different geometries, loading ratios, stored archival materials in the boxes, and the time since last opening, which is of interest. In contrast, the very high uncertainties in the concentrations of acetic acid and tVOCs are of high importance and can only be the consequence of the variability of the archival materials stored inside boxes.

Considering that many variables affect the concentrations of volatile aldehydes in various environments (repositories and boxes), multivariate analysis, particularly principal component analysis is of interest. In Figure 3, we took into account the presence/absence of filtration, ventilation and highly emitting newsprint materials, and designated the Wren library as the only low-loading-ratio environment. The PCA plot obtained is in line with the above discussions in that the three environments that stand out are the 'NA Filtered' with the cleaner filtered environment, 'NUL Newsprint' with the intensively emitting newsprint materials, and the low-load, oak-shelved 'Wren' environment. Most significantly, all other environments, including boxes, cluster close to the 'NA Filtered' environment, indicating the absence of major differences despite the extremely different geometries, air exchange rates, load factors etc. The loading plot shows an interesting co-correlation of the presence of newsprint material and high concentration of formaldehyde, acetaldehyde and furfural,

but not hexanal. This is significant and indicates that the high proportions of hexanal in the Wren library may originate from sources other than paper alone, also by oxidation from appropriate VOC precursors (Atkinson, 2000).

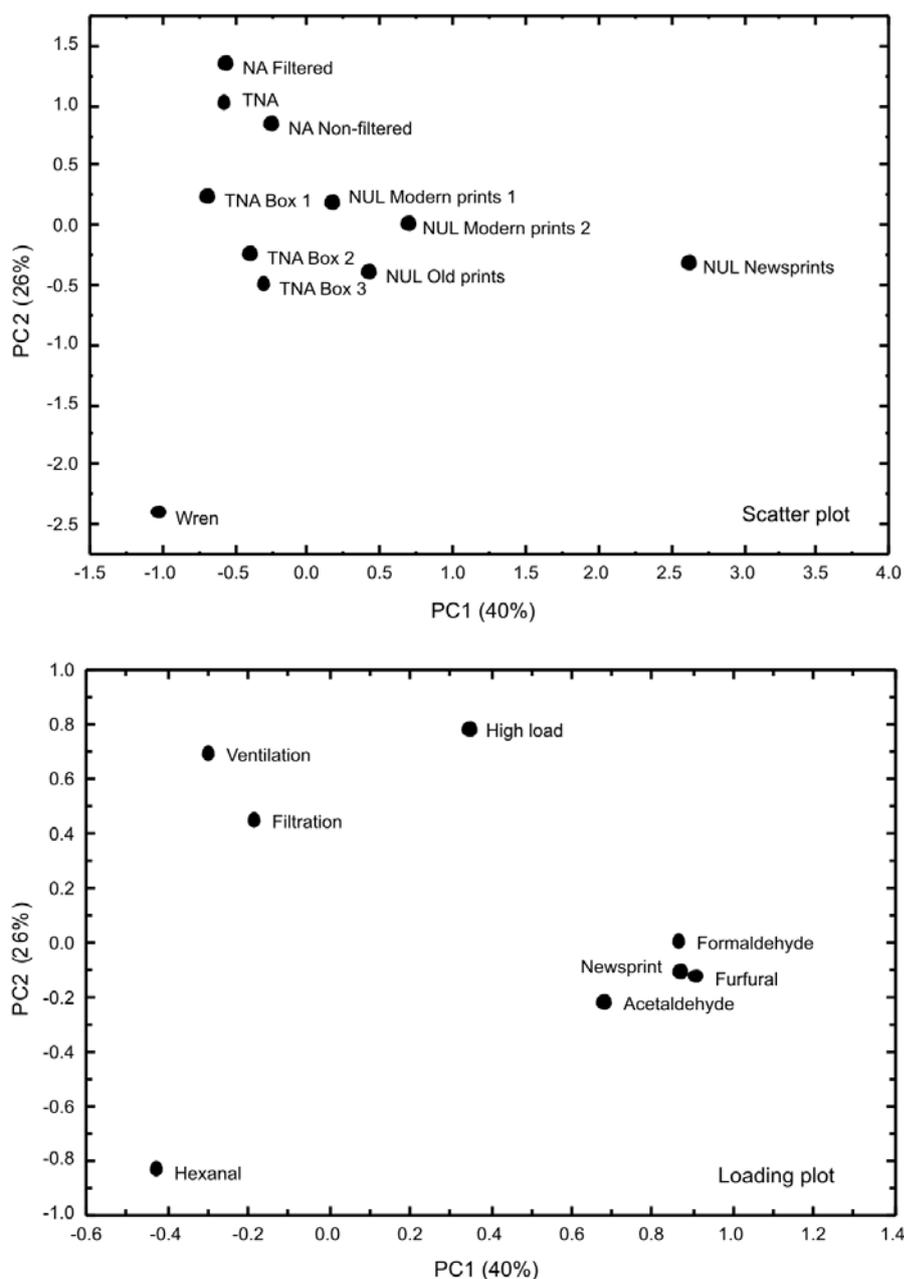


Figure 3: Principal component analysis of data (descriptive: high load, ventilation, filtration, newsprints, and quantitative: formaldehyde, acetaldehyde, hexanal, furfural concentration) in various storage environments, including three boxes. Above: Scatter plot, below: Loading plot.

3.2 Exposure of Personnel to Volatile Aldehydes

Apart from the actual concentrations of volatile aldehydes, the exposure of personnel in archival and library work environments is also of interest. At NA, a study was carried out to determine how employee exposure compares with the presently accepted work exposure limits. The results are shown in Figure 4.

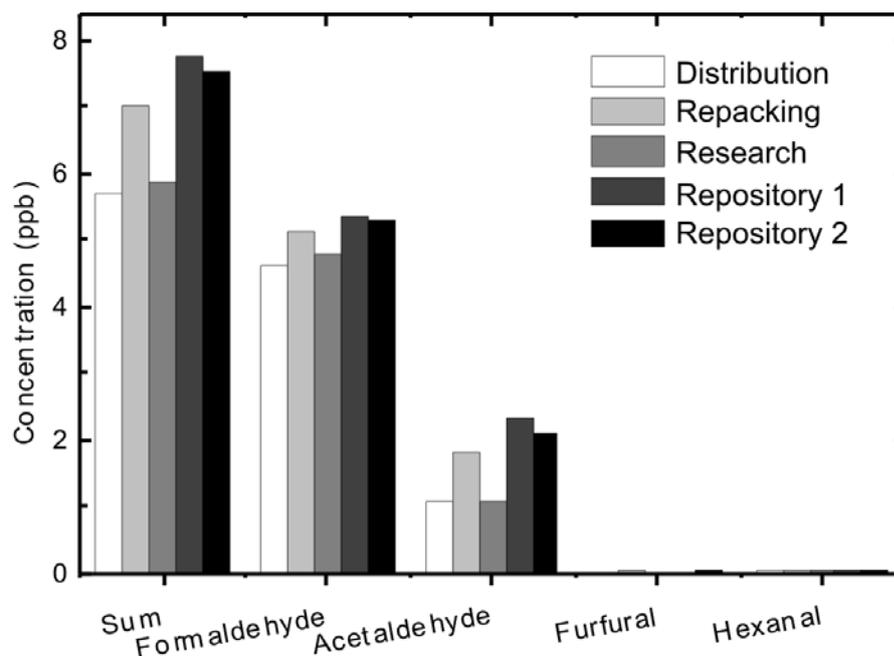


Figure 4: Mean concentrations of aldehydes to which NA workers are exposed in various work situations.

Table 2: Occupational exposure limits for volatile aldehydes (TWA: average value of exposure over the course of an 8 h work shift that is not to be exceeded; STEL: 15-min TWA exposure that should not be exceeded at any time during a workday). Comparison with both may be meaningful, as workers typically spend less than 8 h and much more than 15 min in a repository, daily.

Country	Formaldehyde		Acetaldehyde		Furfural	
	TWA	STEL	TWA	STEL	TWA	STEL
	ppm	ppm	ppm	ppm	ppm	ppm
Slovenia (Pravilnik, 2007)	0.5	0.5	50	50	5	
The Netherlands (DECOS, 2003; van Rooy et al., 2009; International Furan Chemicals, 2003)	1	1.5	20		2	
UK (Health & Safety Executive, 2005)	2	2	20	50	2	5
USA-NIOSH (National Institute for Occupational Safety and Health, 2005)	0.016	1			2	
USA-OSHA (National Institute for Occupational Safety and Health, 2005)	0.75	2	200	150	5	

The data in Figure 4 show that the exposure of all workers is very similar and less than 10 ppb of volatile aldehydes, the average being 7.7 ± 0.2 ppb. This value compares well with values measured in the environments themselves (Figure 1). It appears, however, as if the two repository workers are exposed to slightly higher concentrations than other workers. A comparison with standard exposure limits (Table 2) reveals that the exposure is insignificant, being at the low-ppb concentration levels as compared to the ppm-levels specified in many national health and safety regulations. Even the most stringent National

Institute for Occupational Health and Safety (US) regulations for formaldehyde state a TWA of 16 ppb (National Institute for Occupational Safety and Health, 2005), which is still higher than the determined exposure at NA. This indicates that under normal circumstances the exposure of personnel to volatile aldehydes is not of concern, as they are well within health and safety limits. However, some of the repositories at the NUL did come close to a concentration of 16 ppb when considering total volatile aldehydes. It is therefore possible that in repositories with rapidly degrading paper-based materials, especially in non-ventilated ones, the concentration could exceed the TWA limit as set by NIOSH.

3.3 Exposure of Archival Materials to Volatile Aldehydes

The significantly higher content of tVOCs and acetic acid inside boxes is of concern: acetic acid has been found to cause significant reduction in the degree of polymerisation of cellulose in paper (Dupont and Tétreault, 2000). There are also reports available on the effect of volatile aldehydes, particularly formaldehyde, on heritage materials such as colourants, glass, and metals (Raychaudhuri and Brimblecombe, 2000, Williams et al., 1992, Hatchfield and Carpenter, 1986), but possibly depending on the rate of formation of formic acid rather than on the presence of formaldehyde itself. Tétreault (2003) concluded that formaldehyde is probably less of an issue as an indoor pollutant than is often assumed. Yet, studies of the effects of many volatile organic compounds on paper stability still need to be carried out, as oxidation of volatile aldehydes could occur in archival material after absorption, particularly in view of the finding that cellulose also emits H₂O₂ (Strlič, 2010). Formation of acids could promote acid-catalysed hydrolysis of cellulose. On the other hand, it is also possible that volatile aldehydes promote oxidation of cellulose directly as autoxidation initiators (Strlič and Kolar, 2005). Additionally, studies of multi-pollutant systems may reveal combinations of compounds exhibiting synergistic or antagonistic effects, as indoor environments could act as reaction vessels (Weschler and Shields, 1997).

4. Conclusions

The results of our study show that the concentrations of volatile aldehydes in library and archival environments are in the low ppb region. Remarkably low variation was found in the wide range of repository types, however. The most important conclusions are:

- The highest concentrations of volatile aldehydes were recorded in a non-ventilated repository containing newsprint material, probably due to its low stability.
- Ventilation and filtration have a small positive effect on the concentration of volatile aldehydes in the observed NA and TNA repositories. It is possible that aldehydes

are removed by atmospheric oxidation or surface absorption faster than by forced removal, which could be the reason for the observed very similar concentrations in various repositories, and in addition, very similar to those in closed boxes.

- An additional finding supporting the previous conclusion is that the concentration of aldehydes in boxes is similar to the environment outside the boxes, while the concentration of acids is much higher and the concentration of the monitored pollutant gases with an oxidising effect, such as NO₂, is lower.
- Inside boxes, the concentration of tVOCs and organic acids is significantly higher than outside boxes, and can exceed the concentration of NO₂ by 10 times.
- The concentrations to which personnel working in archives and libraries are exposed to are well below even the most stringent limits set by health and safety agencies, although the cumulative aldehyde concentration may approach the TWA limit set by NIOSH (16 ppb).

The lack of knowledge about the effect of volatile aldehydes and other VOCs in general, on library and archival materials remains a cause for concern. As yet, no guidelines have been specified for volatile aldehydes in buildings housing heritage materials (Blades et al., 2000, Martin and Blades, 1994). Further research needs to be carried out to increase our understanding of the damage caused by aldehydes on heritage materials inside libraries and archives, including potential synergistic effects with other pollutants. To this end, monitoring of volatile organic pollutants in libraries and archives should become a routine activity.

Acknowledgments

The authors gratefully acknowledge the financial support of the UK AHRC/EPSRC Science and Heritage Programme (project CDA 08/412 additionally supported by the National Archives, UK), of the Slovenian Research Agency (Programme P1-0153, and project PaperVOC additionally supported by Nationaal Archief, The Netherlands), and of St Paul's Cathedral, where we additionally thank J. Wisdom, S. Carter and T. Heady, for their help and support. Thanks are also due to C. King, University of Strathclyde, who analysed the acetic acid diffusion tubes.

5. References

- Atkinson R., 2000. Atmospheric chemistry of VOCs and NO_x, *Atmos Environ* 34, 2063-2101.
- Bernstein J.A., Alexis N., Barnes C., Bernstein I.L., Bernstein J.A., Nel A., Peden D., Diaz-Sanchez D., Tarlo S.M., Williams P.B., 2004. Health effects of air pollution, *J Allergy Clin Immunol* 114, 1116-1123.

- Blades N., Oreszczyn T., Bordass B., Cassar M., 2000. Guidelines on Pollution Control in Museum Buildings, In: Martin D. (ed), *Museum Practice*, Museums Association, London, p. 27.
- Brown S.K., 2002. Volatile organic pollutants in new and established buildings in Melbourne, Australia, *Ind Air* 12, 55-63.
- Bruno P., Caselli M., De Gennaro G., Iacobellis S., Tutino M., 2008. Monitoring of volatile organic compounds in non-residential indoor environments, *Ind Air* 18, 250-256.
- Camuffo D., Brimblecombe P., Van Grieken R., Busse H.J., Sturaro G., Valentino A., Bernardi A., Blades N., Shooter D., De Bock L., Gysels K., Wieser M., Kim O., 1999. Indoor air quality at the Correr Museum, Venice, Italy, *Sci Tot Environ* 236, 135-152.
- Camuffo D., Van Grieken R., Busse H.J., Sturaro G., Valentino A., Bernardi A., Blades N., Shooter D., Gysels K., Deutsch F., Wieser M., Kim O., Ulrych U., 2001. Environmental monitoring in four European museums, *Atmos Environ* 35, S127-S140.
- Caselli M., De Gennaro G., Saracino M.R., Tutino M., 2009. Indoor contaminants from newspapers: VOCs emissions in newspaper stands, *Environ Res* 109, 149-157.
- Chan A.T., 2002. Indoor-outdoor relationships of particulate matter and nitrogen oxides under different outdoor meteorological conditions, *Atmos Environ* 36, 1543-1551.
- DECOS, 2003. Formaldehyde: Health-Based Recommended Occupational Exposure Limit, The Hague, Social Affairs and Employment.
- Drakou G., Zerefos C., Ziomas I., Voyatzaki M., 1998. Measurements and numerical simulations of indoor O₃ and NO_x in two different cases, *Atmos Environ* 32, 595-610.
- Dupont A.L., Egasse C., Morin A., Vasseur F., 2007. Comprehensive characterisation of cellulose- and lignocellulose-degradation products in aged papers: Capillary zone electrophoresis of low-molar mass organic acids, carbohydrates, and aromatic lignin derivatives, *Carbohydr Polym* 68, 1-16.
- Dupont A.L., Tétreault J., 2000. Cellulose degradation in an acetic acid environment, *Stud Conserv* 45, 201-210.
- Ekberg L.E., 1996. Relationships between indoor and outdoor contaminants in mechanically ventilated buildings, *Ind Air* 6, 41-47.
- Emsley A.M., Stevens G.C., 1994. Kinetics and Mechanisms of the Low-Temperature Degradation of Cellulose, *Cellulose* 1, 26-56.
- Gair A.J., Penkett, S.A., 1995. The Effects of Wind Speed and Turbulence on the Performance of Diffusion Tube Samplers, *Atmos Environ* 29, 2529-2533.
- Gibson L.T., Cooksey B.G., Littlejohn D., Tennent N.H., 1997. A diffusion tube sampler for the determination of acetic acid and formic acid vapours in museum cabinets, *Anal Chim Acta* 341, 11-19.
- Gibson L.T., Kerr W.J., Nordon A., Reglinski J., Robertson C., Turnbull L., Watt C.M., Cheung A., Johnstone W., 2008. On-site determination of formaldehyde: A low cost measurement device for museum environments, *Anal Chim Acta* 623, 109-116.
- Goho A., 2004. News that's fit to print - and preserve, *Science News* 165, 24-25.
- Gradko Environmental (2006) Technical Data Sheet TDS8: Volatile Organic Compounds. Retrieved from http://www.gradko.co.uk/pdf/Volatile_Organic_Compounds.pdf on 30th August 2009.
- Grzywacz C.M., 2006. Monitoring for gaseous pollutants in museum environments, Los Angeles, Getty Conservation Institute.
- Grzywacz C.M., Tennent N.H., 1994. Pollution Monitoring in Storage and Display Cabinets: Carbonyl Pollutant Levels in Relation to Artifact Deterioration, *Proceedings of Preventive Conservation: Practice, Theory and Research*, pp. 164-170.
- Hatchfield P.B., Carpenter J.M., 1986. The problem of Formaldehyde in Museum Collections, *Intern J Mus Manag Curator* 5, 183-188.
- Health & Safety Executive, 2005. Control of Substances Hazardous to Health (COSHH), EH40/2005, Vol. EH40, London, Health & Safety Commission.

- International Furan Chemicals, 2003. Furfural-Safety Data Sheet IMSDS02EN. Retrieved from http://www.furan.com/_resources/downloads/10195en_rev6.pdf on 6th August 2009.
- IRCCS (2006) Radiello - The Radial Diffusive Sampler, Fondazione Salvatore Maugeri IRCCS. Retrieved from http://www.radiello.com/english/ald_en.htm on 1st September 2009.
- Kucera V., Fitz S., 1995. Direct and indirect air pollution effects on materials including cultural monuments, *Water Air Soil Pollut* 85, 153-165.
- Lattuati-Derieux A., Bonnassies-Termes S., Lavedrine B., 2004. Identification of volatile organic compounds emitted by a naturally aged book using solid-phase microextraction/gas chromatography/mass spectrometry, *J Chromatogr A* 1026, 9-18.
- Lattuati-Derieux A., Bonnassies-Termes S., Lavedrine B., 2006. Characterisation of compounds emitted during natural and artificial ageing of a book. Use of headspace-solid-phase micro extraction/gas chromatography/mass spectrometry, *J Cult Herit* 7, 123-133.
- Manahan S.E., 1999. *Environmental chemistry*, Lewis Publishers, Boca Raton.
- Martin G., Blades N., 1994. Cultural Property Environmental Monitoring, in: *Proceedings of Preventive Conservation: Practice, Theory and Research*, pp. 159-163.
- Meyer B., Boehme C., 1997. Formaldehyde emission from solid wood, *Forest Prod J* 47, 45-48.
- Micales J.A., Skog K.E., 1997. The decomposition of forest products in landfills, *Int J Biodet Biodegrad* 39, 145-158.
- National Institute for Occupational Safety and Health, 2005. NIOSH pocket guide to chemical hazards, U.S. Dept. of Health and Human Services, Public Health Service, Centers for Disease Control and Prevention, National Institute for Occupational Safety and Health, Cincinnati, Ohio.
- Pravilnik, 2007. Pravilnik o varovanju delavcev pred tveganji zaradi izpostavljenosti kemičnim snovem pri delu, Ur.l. RS, št. 100/2001, 39/2005, 53/2007, Slovenia.
- Ramalho O., Dupont A.L., Egasse C., Lattuati-Derieux A., 2009. Emission Rates of Volatile Organic Compounds from Paper, *e-Preserv Sci* 6, 53-59.
- Raychaudhuri M.R., Brimblecombe P., 2000. Formaldehyde oxidation and lead corrosion, *Stud Conserv* 45, 226-232.
- Ryhl-Svendsen M., Glastrup J., 2002. Acetic acid and formic acid concentrations in the museum environment measured by SPME-GC/MS, *Atmos Environ* 36, 3909-3916.
- Salthammer T., Mentese S., Marutzky R., 2010. Formaldehyde in the Indoor Environment, *Chem Rev* DOI: 10.1021/cr800399g.
- Schieweck A., Lohrengel B., Siwinski N., Genning C., Salthammer T., 2005. Organic and inorganic pollutants in storage rooms of the Lower Saxony State Museum Hanover, Germany, *Atmos Environ* 39, 6098-6108.
- SKC, 2007. UME^x100 Passive Sampler for Formaldehyde Catalog No. 500-100, Vol. 2009, USA, SKC Inc. Retrieved from <http://www.skcinc.com/instructions/3760.pdf> on 1st September 2009.
- Srivastava P.K., Pandit G.G., Sharma S., Rao A.M.M., 2000. Volatile organic compounds in indoor environments in Mumbai, India, *Sci Tot Environ* 255, 161-168.
- Strlič M., Kralj Cigić I., Kolar J., De Bruin G., Pihlar B., 2007. Non-destructive evaluation of historical paper based on pH estimation from VOC emissions, *Sensors* 7, 3136-3145.
- Strlič M., Kolar J., 2005. *Ageing and Stabilisation of Paper*, National and University Library, Ljubljana.
- Strlič M., Kolar J., 2008. Recent Developments in non- and micro-destructive analysis of historical paper, in: Colombini M.P., Tassi L. (eds), *New Trends in Analytical, Environmental and Cultural Heritage Chemistry*, Transworld Research Network, Kerala, India, pp. 477-491.

- Strlič M., Thomas J., Trafela T., Cséfalváyova L., Kralj Cigić I., Kolar J., Cassar M., 2009. Material Degradomics: on the Smell of Old Books, *Anal Chem* 81, 8617-8622.
- Strlič M., Menart E., Kralj Cigić I., De Bruin G., Kolar J., Cassar M., 2010. Emission of volatiles and reactive oxygen species during degradation of iron gall ink, *Polym Degrad Stab* 95, 66-71.
- Tétreault J., 2003. Airborne pollutants in museums, galleries and archives: risk assessment, control strategies and preservation management, Canadian Conservation Institute, Canada.
- Thomson G., 1965. Air pollution: A review for Conservation Chemists, *Stud Conserv* 10, 147-167.
- Van Rooy F.G., Smit L.A., Houba R., Zaat V.A., Rooyackers J.M., Heederik D.J., 2009. A cross-sectional study of lung function and respiratory symptoms among chemical workers producing diacetyl for food flavourings, *Occup Environ Med* 66, 105-110.
- Wainman T., Weschler C.J., Liou P.J., Zhang J., 2001. Effects of Surface Type and Relative Humidity on the Production and Concentration of Nitrous Acid in a Model Indoor Environment, *Environ Sci Technol* 35, 2200-2206.
- Weschler C.J., Shields H.C., 1997. Potential reactions among indoor pollutants, *Atmos Environ* 31, 3487-3495.
- Williams E.L., Grosjean E., Grosjean D., 1992. Exposure of Artists' Colorants to Airborne Formaldehyde, *Stud Conserv* 37, 201-210.
- Wise A., Granowski C., Gourley B., 2005. Out of the Box - Measuring Microclimates in Australian-made Solander boxes, in: Rayner J., Kosek J.M., Christensen B. (eds), *Art on Paper: Mounting and Housing*, Archetype Publications, London, pp. 55-58.