

Divergent streamlines and free vortices in Newtonian fluid flows in microfluidic flow-focusing devices

M. S. N. Oliveira^{1,2,†}, F. T. Pinho² and M. A. Alves²

¹ Department of Mechanical and Aerospace Engineering, University of Strathclyde, Glasgow G1 1XJ, UK

² Faculdade de Engenharia, Universidade do Porto, Centro de Estudos de Fenómenos de Transporte, Rua
Dr Roberto Frias, 4200-465 Porto, Portugal

(Received 17 October 2011; revised 4 June 2012; accepted 27 July 2012)

The appearance of divergent streamlines and subsequent formation of free vortices in Newtonian fluid flows through microfluidic flow-focusing geometries is discussed in this work. The micro-geometries are shaped like a cross-slot but comprise three entrances and one exit. The divergent flow and subsequent symmetric vortical structures arising near the centreline of the main inlet channel are promoted even under creeping flow conditions, and are observed experimentally and predicted numerically above a critical value of the ratio of inlet velocities (VR). As VR is further increased these free vortices continue to grow until a maximum size is reached due to geometrical constraints. The numerical calculations are in good agreement with the experimental observations and we probe numerically the effects of the geometric parameters and of inertia on the flow patterns. In particular, we observe that the appearance of the central recirculations depends non-monotonically on the relative width of the entrance branches and we show that inertia enhances the appearance of the free vortices. On the contrary, the presence of the walls in three-dimensional geometries has a stabilizing effect for low Reynolds numbers, delaying the onset of these secondary flows to higher VR . The linearity of the governing equations for creeping flow of Newtonian fluids was invoked to determine the flow field for any VR as a linear combination of the results of three other independent solutions in the same geometry.

Key words: low-Reynolds-number flows, microfluidics, vortex dynamics

1. Introduction

Hydrodynamic focusing at the microscale has been used for various purposes, and has found many interesting practical applications, including micro-mixing, droplet formation, synthesis of micro-particles, among others. The basic design consists of a long micro-channel with three entrances, typically in a cross-like arrangement, as shown in figure 1, in which a central mainstream is shaped by two lateral streams that work as sheath flows. A number of authors have used this type of configuration as passive micro-mixers (Jensen 1998; Knight *et al.* 1998) and it has been shown that mixing times can be controlled and reduced by adjusting the pressure ratio

† Email addresses for correspondence: monica.oliveira@fe.up.pt, monica.oliveira@strath.ac.uk

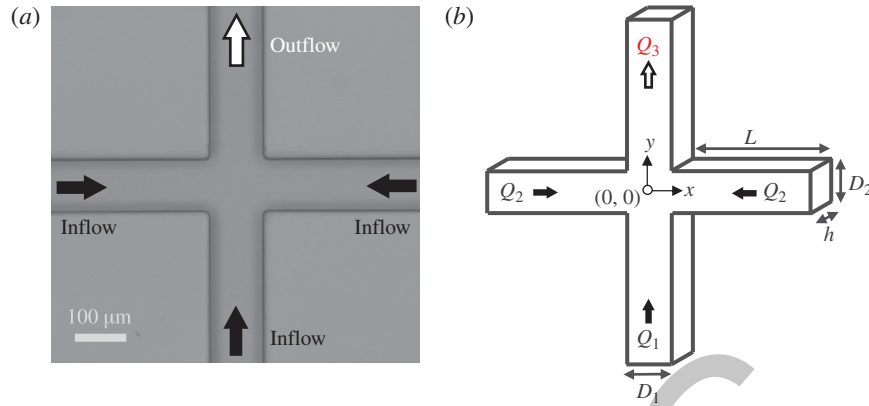


FIGURE 1. The flow-focusing geometry: (a) microscope image showing the central region of the experimental microfluidic channel with three inlets and one outlet; and (b) schematics of the geometry showing the coordinate system and relevant geometrical variables and flow rate, Q .

38 between the main inlet stream and the lateral sheath streams (Jensen 1998). Luo
 39 (2009) explored electrokinetic instability effects to promote mixing. Another widely
 40 explored application that makes use of flow-focusing micro-devices is the production
 41 of droplets with narrow size distribution, whose sizes are tailored by the flow-rate
 42 ratio of the two immiscible fluids (Anna, Bontoux & Stone 2003; Garstecki, Stone &
 43 Whitesides 2005; Anna & Mayer 2006; Nie *et al.* 2008). Using the same principle
 44 together with a curing or reaction process (usually promoted by UV illumination),
 45 solid polymeric particles, including multifunctional particles of controlled shape and
 46 size, have also been synthesized (Nisisako, Torii & Higuchi 2004; Dendukuri & Doyle
 47 2009).

48 The strong elongational flows that can be generated at the centre of these devices
 49 make them particularly suitable for the study of extensional effects (Arratia, Gollub &
 50 Durian 2008; Oliveira *et al.* 2009). The effect of elasticity on filament thinning and
 51 break-up has been investigated by Arratia *et al.* (2008) using sets of two immiscible
 52 fluids. The authors observed distinct behaviours for Newtonian and polymeric fluids
 53 and discussed the suitability of the exponential flow thinning behaviour to measure
 54 the extensional viscosity of polymer solutions. Oliveira *et al.* (2009) investigated
 55 numerically the onset of two distinct elastic instabilities in viscoelastic fluid flows
 56 using the upper-convective Maxwell (UCM) (Bird, Armstrong & Hassager 1987) and
 57 Phan-Thien–Tanner (PTT) (Phan-Thien & Tanner 1977) rheological models: one in
 58 which the flow becomes asymmetric but remains steady, and a second instability at
 59 higher Deborah numbers in which the flow becomes unstable, oscillating periodically
 60 in time. This latter type of elastic instability can be exploited to passively promote
 61 mixing at the microscale, under low Reynolds number flow conditions. The present
 62 authors have previously discussed the possibility of using these geometries with a
 63 single fluid to obtain a uniform strain rate for extensional rheometry purposes (Oliveira
 64 *et al.* 2009).

65 While investigating numerically the effect of operating and geometric parameters
 66 on Newtonian fluid flow through flow-focusing devices at low Reynolds numbers,
 67 typical of microfluidic flows, we predicted the onset of free vortices upstream of

the intersection region, located near the centre of the channel and away from any solid–liquid interface. The location at which these vortical structures arise was at first sight unexpected as recirculations typically develop near solid–liquid interfaces for low Reynolds number flows. A well known example in Newtonian fluid flow is the formation of recirculations downstream of an expansion even under creeping flow conditions (Moffatt 1964), which increases in size and intensity as the Reynolds number is increased (Townsend & Walters 1994; Chiang, Sheu & Wang 2000; Oliveira 2003; Tsai *et al.* 2006; Oliveira *et al.* 2008; Sousa *et al.* 2011).

The recirculation structures observed near the centreline in the flow-focusing geometry are similar in appearance to bubble-like structures found during vortex breakdown experiments in torsionally driven cavity flows (Leibovich 1978). We note, however, that vortex breakdown occurs in flows with swirl and only at relatively high Reynolds numbers (Escudier 1988), and therefore the underlying mechanism is inherently different from the flow-focusing configuration considered here, even though they may share some flow features. There are various types of vortex breakdown, but essentially the strong swirl creates an adverse pressure gradient in the axial direction, which the axial flow cannot sustain above a critical condition, leading to flow reversal (Lucca-Negro & O’Doherty 2001).

In this paper we investigate the formation and enhancement of the vortical structures formed at low Reynolds numbers in the flow-focusing geometry and characterize the flow experimentally and numerically. We show that prior to the onset of these central vortices the flow is initially characterized by the appearance of diverging streamlines upstream of the intersection at lower VR . We show numerically that such diverging streamlines can occur even in flows without inertia.

The paper is organized as follows. In § 2 we give an overview of the flow-focusing geometry and the experimental set-up. In § 3, we present a brief outline of the numerical method and computational meshes used. In § 4, an overview of the flow characteristics observed in two-dimensional simulations is presented and in § 5 three-dimensional experimental results are discussed and compared to the corresponding three-dimensional numerical simulations. We conclude the paper with a brief summary of our findings in § 6.

2. Flow geometry and experimental set-up

We study the flow of a Newtonian fluid (water) through a microfluidic flow-focusing device which presents a cross-like shape and contains three inlets and one outlet channel. The channels used in the experiments were fabricated in polydimethylsiloxane (PDMS) from an SU-8 photoresist mould using standard soft-lithography techniques (McDonald *et al.* 2000) which produce planar geometries of constant depth ($h = 100 \mu\text{m}$ in our mould). The geometry is presented in figure 1, where the main variables are identified. The width of the inlet (D_1 , D_2) and outlet channels (D_1) is kept the same and equal to $100 \mu\text{m}$, which confers a square cross-section to the geometry. The length of the inlet/outlet channels is large enough ($L/D_1 = 50$) to guarantee that the flow is fully developed far from the region of interest at all flow rates studied.

A photograph of the experimental set-up is shown in figure 2. A syringe pump with three autonomous modules (neMESYS, Cetoni GmbH) was used to inject the fluid in each of the inlet streams independently. In this way, we are able to vary the imposed flow-rate ratio, $FR = Q_2/Q_1$ (see figure 1), or the corresponding velocity ratio, defined as the ratio of the inlet average velocities in the side streams to the average velocity in

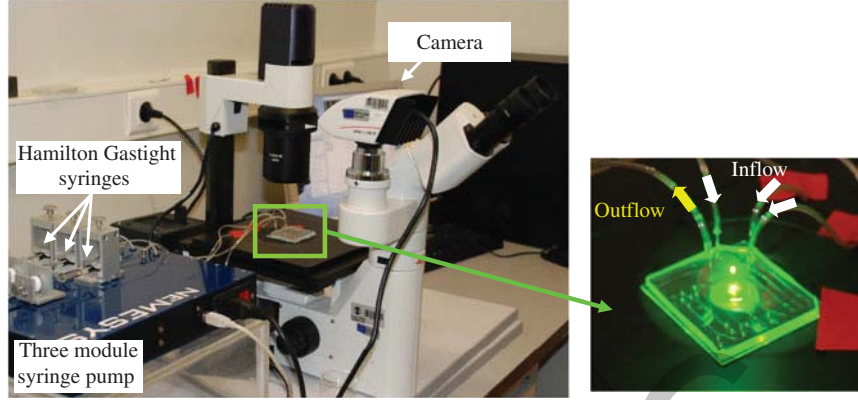


FIGURE 2. (Colour online) Experimental set-up showing the injection system and the optical system used for flow visualization.

116 the central inlet stream ($VR = U_2/U_1$). Syringes with different volumes (50 μl –10 ml)
 117 were used according to the required flow rate and connected to the micro-geometries
 118 using Tygon tubing. The same type of tubing was used to connect the outlet channel
 119 to a reservoir where the fluid was collected.

120 Flow visualizations were carried out using streak photography, in which long
 121 exposure times are used to capture the flow patterns. For this purpose, the fluid
 122 was seeded with 1 μm fluorescent tracer particles (Nile Red, Molecular Probes,
 123 Invitrogen, Ex/Em: 520/580 nm), and additionally a surfactant (sodium dodecyl
 124 sulphate, 0.1 wt%, Sigma-Aldrich) was added to the fluid to reduce the adhesion
 125 of fluorescent particles to the channel walls. The optical set-up is composed of
 126 an inverted epifluorescence microscope (DMI LED, Leica Microsystems GmbH)
 127 fitted with an appropriate filter cube (Leica Microsystems GmbH, excitation BP
 128 530–545 nm, dichroic mirror 565 nm, barrier filter 610–675 nm), a CCD camera
 129 (Leica Microsystems GmbH, DFC350 FX), and a 100 W mercury lamp as illumination
 130 source.

131 All images shown in this work were captured at the centre plane using a 10 \times
 132 ($NA = 0.25$) microscope objective (Leica Microsystems GmbH). For the set-up used,
 133 the depth of field corresponds to $\delta z = 12 \mu\text{m}$ calculated according to (Meinhart,
 134 Wereley & Gray 2000):

$$135 \quad \delta z = \frac{n\lambda_0}{(NA)^2} + \frac{ne}{(NA)M}, \quad (2.1)$$

136 where n is the refractive index, λ_0 is the wavelength of the light (in vacuum), NA is
 137 the numerical aperture of the objective, e is the minimum detectable size and M is the
 138 total magnification (in this case $e/M = 0.65 \mu\text{m}$).

139 Furthermore, a limited number of experiments were carried out using a different
 140 technique in which a small amount of Rhodamine B dye (Sigma-Aldrich) was added
 141 to the central mainstream while no fluorescent dye (or fluorescent particles) were
 142 added to the fluid in the lateral entrances. In this way we take advantage of the
 143 relatively large depth of field to highlight the three-dimensionality of the fluid path
 144 based on the fluorescence intensity of the imaged dye stream.

WR	0.1	0.3	0.5	0.8	1	2	3	5	10
NC	13 965	13 965	16 475	20 491	23 001	35 551	48 603	74 205	85 751

TABLE 1. Total number of cells (NC) of the standard two-dimensional computational meshes, with cell size in the central region $\Delta x = \Delta y = D_1/51$.

3. Numerical method and computational meshes

In the numerical calculations, an in-house fully implicit finite volume method (FVM) was used to solve the appropriate equations of conservation of mass and momentum assuming the Newtonian fluid flow is isothermal and incompressible (Oliveira, Pinho & Pinto 1998; Oliveira & Pinho 1999):

$$\nabla \cdot \mathbf{u} = 0, \quad (3.1)$$

$$\rho \left(\frac{\partial \mathbf{u}}{\partial t} + \nabla \cdot (\mathbf{u} \mathbf{u}) \right) = -\nabla p + \mu \nabla^2 \mathbf{u}, \quad (3.2)$$

where ρ is the density of the fluid, t the time, \mathbf{u} the velocity vector, p the pressure and μ the dynamic viscosity.

We use an implicit first-order Euler scheme for time discretization, central differences for the discretization of the diffusive terms and the CUBISTA high-resolution scheme (Alves, Oliveira & Pinho 2003) for the discretization of the advective terms of the momentum equation. The details of the numerical method will not be repeated here as they have been described thoroughly elsewhere (Oliveira *et al.* 1998; Oliveira & Pinho 1999; Alves *et al.* 2003). A large number of simulations were done under creeping flow conditions, i.e. in the limit when $Re \rightarrow 0$. To simulate such flows, we neglect the advective term on the left-hand side of the momentum equation (3.2), hence solving the corresponding Stokes flow. In those cases we keep the transient term ($\rho \partial \mathbf{u} / \partial t$) and use a pseudo-time-marching algorithm to achieve steady flow conditions. When steady state is achieved the transient term vanishes, and we recover the Stokes equation, valid for creeping flow.

We perform both two- and three-dimensional simulations in which the standard meshes are block-structured and divide the central region of the geometry uniformly into control volumes of size $\Delta x = \Delta y = D_1/51$. In the three-dimensional simulations, the size and shape of the geometry were kept equal to the experiments, with side streams being introduced into the central mainstream through channels of equal dimensions. In this case two sets of meshes were used: a standard mesh used to perform most of the calculations ($NC = 140\,625$, $\Delta x = \Delta y = \Delta z = D_1/25$) and a more refined mesh having nearly twice the number of cells in each direction ($NC = 1\,125\,000$, $\Delta x = \Delta y = \Delta z = D_1/51$). In two-dimensional simulations, other configurations have also been tested: in particular, the width of the lateral channels (D_2) was varied, while the width of the outlet channel was kept equal to D_1 . The relative width of the entrance branches ($WR = D_2/D_1$) accounts for the effects of geometric parameters and was varied from 0.1 to 10. Mesh refinement tests have been carried out elsewhere (Oliveira *et al.* 2009) demonstrating the good accuracy of the calculations using this mesh ($\Delta x = \Delta y = D_1/51$). The total number of cells (NC) varies according to the specific geometric configuration under consideration, as shown in table 1.

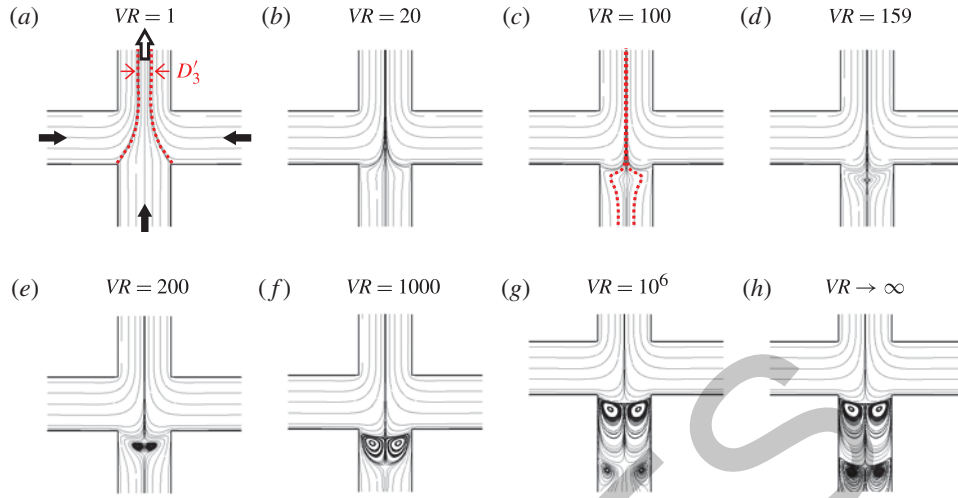


FIGURE 3. (Colour online) Effect of VR on the flow patterns obtained numerically under creeping flow through a 2D flow-focusing geometry with $WR = 1$: (a) $VR = 1$; (b) $VR = 20$; (c) $VR = 100$; (d) $VR = 159$; (e) $VR = 200$; (f) $VR = 1000$; (g) $VR = 10^6$; (h) $VR \rightarrow \infty$. For $VR = 1$ (a) the dashed lines highlight the separation streamlines that define the converging region. For $VR = 100$ (c) the dashed lines highlight the diverging character of the streamlines upstream of the central region.

183 The physical properties of the fluid used in the three-dimensional numerical
 184 calculations were selected to match those measured experimentally, i.e. the viscosity
 185 was set to 0.891 mPa s and the density to 997 kg m^{-3} , corresponding to water at
 186 $25 \text{ }^\circ\text{C}$, the temperature at which the experiments were performed.

187 4. Two-dimensional results

188 In this section we present an overview of the flow field obtained using numerical
 189 calculations considering a simplified two-dimensional flow-focusing geometry.

190 4.1. Creeping flow characteristics

191 The flow patterns obtained using two-dimensional (2D) numerical calculations under
 192 creeping flow conditions ($Re = 0$) are shown in figure 3. Under these particular
 193 operational conditions, the flow is steady and symmetric about the plane $x = 0$ and
 194 the two opposing lateral fluid streams shape the central mainstream that is flowing
 195 perpendicularly to the lateral entrances, generating a converging flow region. For
 196 $VR = 1$ (figure 3a), we use (red) dashed lines to show the separation streamlines
 197 that define the border between the flow entering from the lateral arms and the flow
 198 coming from the central inlet. The converging flow region, delimited by the separation
 199 streamlines, can be visualized as a smooth contraction geometry in which there is slip
 200 at the walls. In fact for low VR , the separation streamlines define a nearly hyperbolic
 201 shaped contraction, which is known to generate strong extensional flows near the
 202 centreline with nearly constant strain rate (James, Chandler & Armour 1990; Oliveira
 203 *et al.* 2007; Campo-Deaño *et al.* 2011).

204 As VR is increased, the curvature of the separation streamlines near the lateral
 205 entrances is enhanced, and the Hencky strain imposed in the converging region
 206 increases. Here the Hencky strain is defined based on the widths of the converging

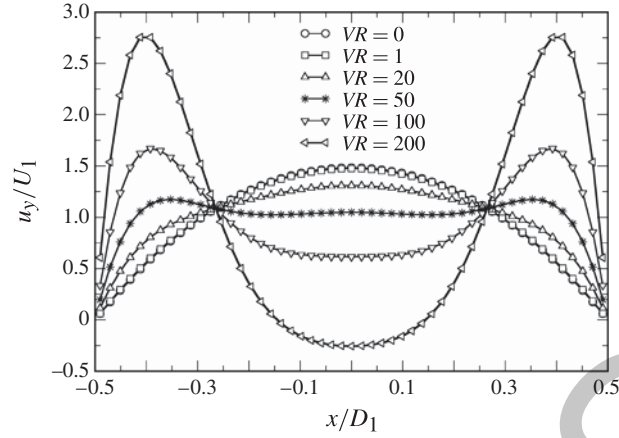


FIGURE 4. Axial velocity profiles at $y/D_1 = -0.75$ for various VR under creeping flow conditions (2D flow, $WR = 1$).

region upstream and downstream of the central region, $\varepsilon_H = \ln(D_1/D'_3)$ where D'_3 is shown in figure 3(a) ($VR = 1$). For high strains, when the assumption $U'_3 \approx 1.5U_3$ is a reasonable approximation, the Hencky strain can be expressed as $\varepsilon_H = \ln[3(1 + 2FR)/2]$. Simultaneously, the streamlines in the mainstream channel just upstream of the central region (for $-1 \lesssim y/D_1 \lesssim -0.75$) become increasingly divergent (see the red dashed streamlines in figure 3c for $VR = 100$), i.e. the flow moves first towards the wall and then converges again toward the contraction, as if avoiding an invisible obstacle (Alves & Poole 2007). Streamlines with this characteristic shape are commonly observed in contraction flows with viscoelastic fluids with high extensional viscosity, but not with Newtonian fluids under similar flow conditions (Evans & Walters 1989; Boger & Binnington 1990; Hulslen 1993; Rodd *et al.* 2005; Alves & Poole 2007). Diverging flow is generally ascribed to fluid elasticity in strong extensional fields, and inertia- and deformation-rate-dependent material functions were seen to enhance its intensity (Rodd *et al.* 2005). However, Alves & Poole (2007) have shown numerically that inertia and shear-thinning conditions are not required to observe divergent streamlines for contraction flows of viscoelastic fluids. Here, we show that diverging streamlines can also be observed with Newtonian fluids in the flow-focusing device under creeping flow conditions, i.e. without inertia or elasticity. In other words, we demonstrate that divergent streamlines can arise due to the coupling of geometric and viscous effects alone.

The evolution of the divergent flow in the central inlet arm can be followed in more detail by analysing the velocity and pressure profiles in that region. Figure 4 shows the axial velocity profiles along the x -direction in the region of the divergent streamlines, specifically for $y/D = -0.75$. For $VR = 1$, the profile has a quasi-parabolic shape, but as VR increases, the velocity at the centreline decreases, while an increase is seen close to the bounding walls. Eventually, the maximum axial velocity shifts from the centreline and the profiles exhibit strong velocity overshoots close to the sidewalls. Further, the axial velocity profiles along the $x = 0$ centreline shown in figure 5(a) exhibit an undershoot just upstream of the converging region, which is a fingerprint of divergent flow (Alves & Poole 2007). The magnitude of this undershoot increases gradually with increasing VR . Furthermore, as shown in figure 5(b), along

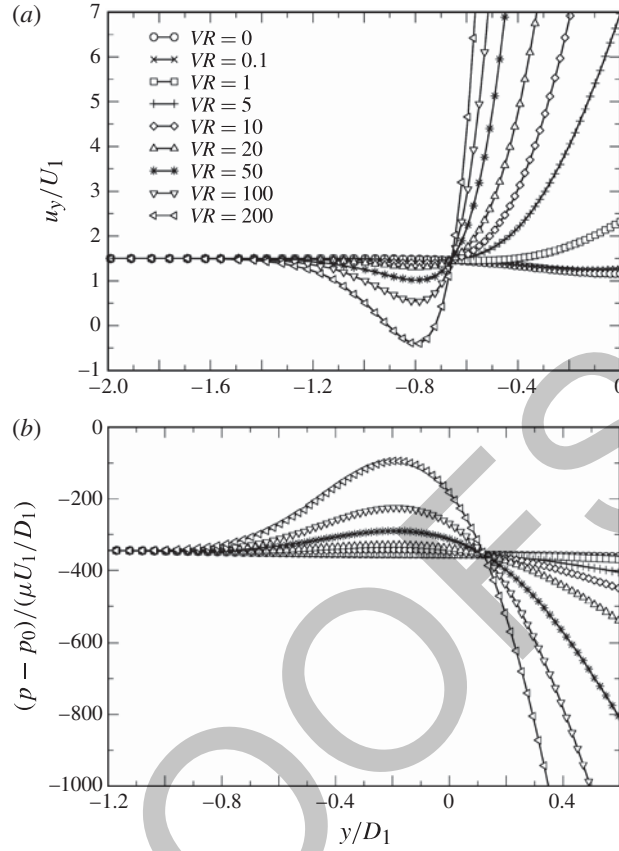


FIGURE 5. (a) Axial velocity and (b) pressure profiles along the centreline ($x/D_1 = 0$) for various VR under creeping flow conditions (2D flow, $WR = 1$).

238 the centreline adverse pressure gradients are generated just upstream of the centre of
 239 the device to match the pressures resulting from the central and sheath inflows which
 240 eventually lead to flow separation.

241 It is interesting to note that all the profiles at different VR (in figures 4 and 5)
 242 intersect each other at the same location, suggesting that these may belong to the
 243 same family of curves. In fact this is further supported by a theoretical analysis of
 244 the governing equations. It is well known that for two-dimensional creeping flows, the
 245 stream function for an incompressible Newtonian fluid flow satisfies the biharmonic
 246 equation

$$247 \quad \nabla^4 \psi = 0, \quad (4.1)$$

248 where ψ is the stream function ($u = \partial\psi/\partial y$; $v = -\partial\psi/\partial x$). Such creeping flow
 249 solutions can be combined linearly, with the end result itself being a solution to
 250 the Stokes equation

$$251 \quad a\nabla^4 \psi_1 + b\nabla^4 \psi_2 = \nabla^4 (a\psi_1 + b\psi_2) = \nabla^4 \psi^* = 0, \quad (4.2)$$

252 where a and b are arbitrary scalars. This characteristic, which ensues from the linear
 253 nature of the governing equations in creeping flows in conjunction with linearity and

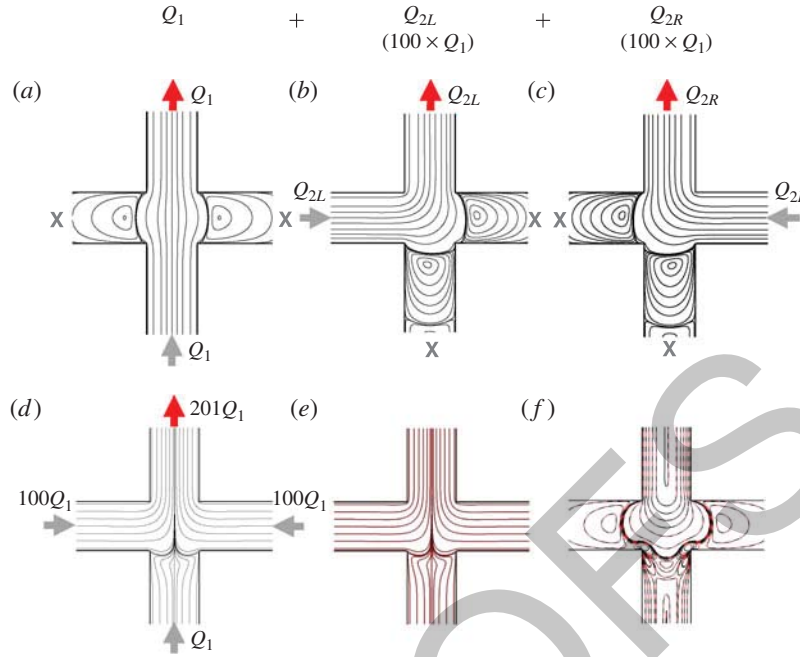


FIGURE 6. (Colour online) Linear combination of three reference flow fields (*a–c*) to determine the streamlines for (*d*) $VR = 100$. (*e,f*) Comparison of the flow fields for $VR = 100$ (2D flow, $WR = 1$) obtained by a direct numerical simulation (red lines) and by linear combination of reference solutions (black lines): (*e*) streamlines; (*f*) normalized axial velocity contour lines.

symmetry in the boundary conditions, is very useful in deriving results for a given flow without solving it fully. It should be highlighted, however, that any predictive capabilities are limited to the accuracy of the original reference results, i.e. the results are still mesh-dependent, which means that any inaccuracies in the base simulations will be reflected in the resulting predictions.

A consequence of the above analysis is that by using any three linearly independent cases we are able to predict the flow field in the cross-geometry for any other VR in the same mesh and, in fact, for any other flow configuration, whether symmetric or not. We have tested this approach using the three reference cases illustrated in figure 6(*a–c*). Figure 6(*e,f*) shows a comparison between the results obtained numerically for $VR = 100$ and those calculated by combining the three flow fields, considering $Q_{2L}/Q_1 = Q_{2R}/Q_1 = 100$. It is clear that exactly the same solution is obtained independently of the method used, both in terms of the streamlines and in terms of the normalized velocity field (where any inconsistencies would be easily detected). Furthermore, we are able to predict the flow in any type of cross-like geometry with four inlets/outlets (whether in a flow-focusing or a cross-slot arrangement).

Given this characteristic of the flow, we are able to collapse the corresponding velocity profiles for different VR onto a single master curve using an appropriate normalization. The same can be done for other variables such as pressure, normal stress differences, etc. Figure 7 shows the profiles of the axial velocity, pressure and the first normal stress difference normalized using the reference case ($VR = 0$). It is

254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275

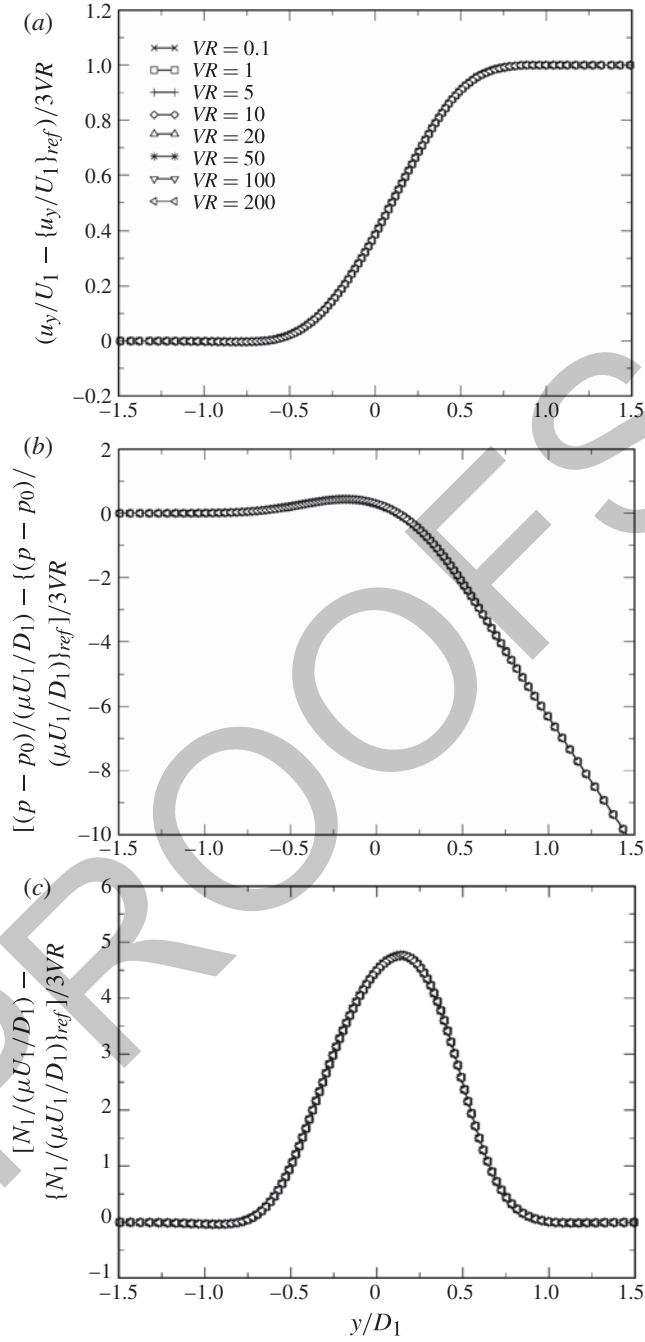


FIGURE 7. (a) Normalized axial velocity, (b) pressure and (c) first normal stress difference ($N_1 = \tau_{yy} - \tau_{xx}$) profiles along the centreline ($x/D_1 = 0$) for various VR under creeping flow conditions (2D flow, $WR = 1$). The reference conditions (*ref*) were taken as those for $VR = 0$.

276 clear from this figure that the three sets of profiles indeed collapse onto a single
 277 master curve, and coefficient 3 is used for convenience as it ensures a normalization of
 278 the master velocity profile between 0 and 1.

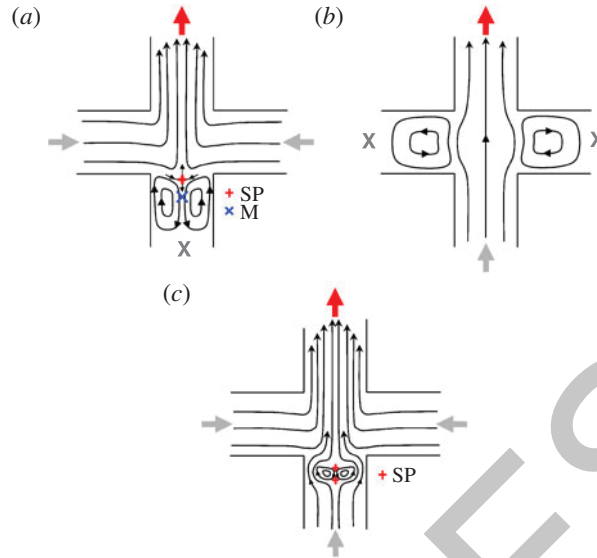


FIGURE 8. (Colour online) Mechanism of formation of free vortices showing the two independent base flows. (a) Flow generated by the collision between two opposed streams equivalent to a T-channel with a long cavity. A free stagnation point, SP (marked with a red ‘+’), is generated at the point of collision between the two streams, and recirculations form below this SP yielding a minimum (negative) velocity close to point M (marked with a blue ‘x’). (b) Flow entering from the lower channel of flow (a) and exiting through the upper channel. When the negative velocities in the lower channel of flow (a) are greater (in magnitude) than the positive velocities of flow (b), then flow (c) is generated, corresponding to our results with flow-focusing configuration above a critical VR .

4.2. Onset and development of free central vortices

One may also use the concept of linear combination of elementary flows, discussed in the previous section, to predict the onset of vortices and the fact that these appear near the centreline rather than near the walls. The flow-focusing flow at a given value of VR may be constructed as a combination of two base flows, as depicted schematically in figure 8: (a) flow in a T-channel with a deep cavity; and (b) flow entering from the lower channel and exiting through the upper channel.

In the flow through a T-channel with a cavity, it is intuitively clear that a free stagnation point (marked with SP in figure 8a) will be generated at the $x = 0$ centreline at the point of collision between the two streams. At the stagnation point the velocity is zero, the extension rate is finite and the pressure attains a local maximum in this region. The generation of a free SP in a similar geometry (though with a less deep cavity) has been confirmed experimentally and numerically by Soulages *et al.* (2009). As expected for the flow near a free stagnation point, the fluid is driven away, both upwards and downwards, from the SP as sketched in figure 8(a). In other words, the flow is highly compressive in the x -direction and highly extensional in the y -direction, meaning that the velocity along the $x = 0$ axis centreline will be negative below the SP and positive above the SP.

If we now superimpose base flow (a) onto flow (b), the positive centreline velocity of flow (b) will partially offset the negative velocities of flow (a) that are present below the SP. Nevertheless, if the contribution of flow (b) is much lower than that of flow (a) (i.e. at high VR), there will still be a region of negative velocities at the $x = 0$

279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299

300 centreline. Conversely, near the walls of the lower inlet channel, the fluid is always
 301 moving upwards, since both contributing flows exhibit positive velocities in this region.
 302 These two facts necessarily imply the formation of two symmetrical recirculations near
 303 the $x = 0$ axis, rather than close to the walls as sketched in figure 8(c). If, on the
 304 other hand, VR is low, the contribution of flow (b) is sufficient to ensure that the
 305 velocities in the $x = 0$ line are always positive, thus suppressing the vortex formation.
 306 Consequently, there will exist a critical point along the centreline at which the two
 307 contributions cancel out, i.e. the minimum velocity along the centreline is precisely
 308 zero, marking the onset of vortex formation. This critical point may be estimated from
 309 a linear combination of flows (a) and (b) by computing the value of VR for which
 310 the minimum centreline velocity reaches zero. This estimate yields a value for VR_c in
 311 excellent agreement with the onset of vortex formation observed in figure 3. The onset
 312 of flow separation can also be intuitively thought to be due to the locally high pressure
 313 generated at the intersection of the lateral streams. This adverse pressure gradient
 314 experienced by the fluid elements emerging from the lower channel will lead to flow
 315 separation when the adverse pressure gradient is sufficiently high, a phenomenon that
 316 increases with an increase in VR .

317 4.3. Effect of the velocity ratio (VR)

318 As described above, for sufficiently large velocity ratios, the minimum velocity at the
 319 centreline reaches zero (for $VR \approx 159$). Beyond this VR value, a reversal of the axial
 320 velocity along the centreline is observed, as shown by the negative axial velocities U_y
 321 in figure 5(a) (e.g. for $VR = 200$), leading to the formation of a pair of symmetrical
 322 recirculations near the centreline of the mainstream inlet channel just upstream of the
 323 central region (see figure 3d, $VR = 159$), at the core of the diverging streamline region.
 324 Recirculation growth is observed as VR is further increased until a second recirculation
 325 of lower intensity starts to form (see figure 3g, $VR = 10^6$), but now attached to the
 326 wall. In fact, for $VR \rightarrow \infty$ the central inlet channel acts as a deep cavity with no net
 327 flow ($Q_1 = 0$) (as sketched in figure 8a), and in this case a trail of recirculations is
 328 observed all along the cavity (see figure 3h, $VR \rightarrow \infty$), with each subsequent pair of
 329 recirculations driven by the previous pair. The decay of the intensity of this chain of
 330 recirculations can be predicted according to the theoretical analysis of Moffatt (1964).

331 This sequence of recirculations is analogous to that observed when a true cross-slot
 332 geometry is considered (two entrances and two exits) with unbalanced outflow streams.
 333 In this case, depicted in figure 9(b), vortical structures are also formed as VR increases,
 334 and they appear at nearly the same value of VR as for the flow-focusing geometry of
 335 figure 9(a). However, no divergent flow is observed in the cross-slot, and the primary
 336 recirculations are now localized at the wall rather than at the centre of the channel.

337 We should emphasize that we are also able to predict the onset of vortex formation
 338 for any of these configurations by applying the linear combination of base solutions
 339 described in § 4.1. By using reference solutions $VR = 0$ and $VR \rightarrow \infty$, one can predict
 340 the Newtonian fluid flow fields for both a flow-focusing arrangement (parameters a
 341 and b in (4.2) are both positive scalars) and a cross-slot geometry (parameters a and b
 342 have opposite signs).

343 In figure 10, we show the effect of VR on the size of the primary recirculations,
 344 y_R , of the flow focusing device. The size was determined at the centreline as also
 345 illustrated in figure 10. Above the critical VR , the centreline velocity becomes negative,
 346 leading to the formation of free central vortices, which grow in size, as shown
 347 qualitatively in figure 3 and quantitatively in figure 10. Initially, this growth follows
 348 closely a square-root function, $y_R/D_1 = a_1\sqrt{\ln(VR) - \ln(VR_c)}$, where a_1 is a fitting

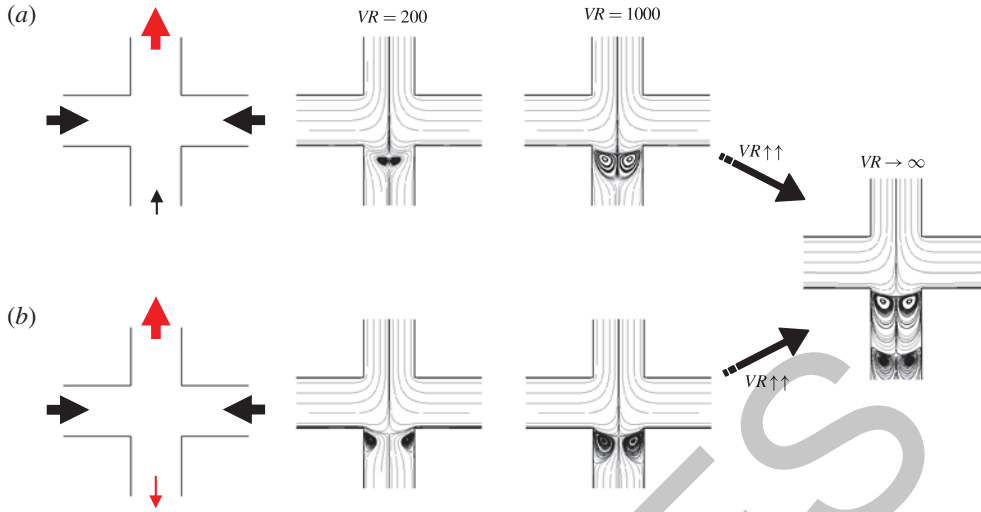


FIGURE 9. (Colour online) Vortex formation under creeping flow conditions (2D flow, $WR = 1$): comparison between (a) the flow-focusing device and (b) the cross-slot geometry with unbalanced outflow streams.

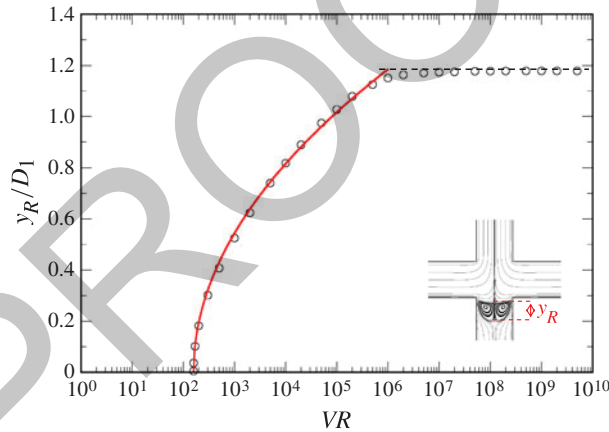


FIGURE 10. (Colour online) Effect of VR on vortex size under creeping flow conditions (2D flow, $WR = 1$). The symbols represent the numerical data, the black dashed line indicates the asymptotic value at $VR \rightarrow \infty$ and the red solid line corresponds to the function $y_R/D_1 = a_1 \sqrt{\ln(VR) - \ln(VR_c)}$, with $a_1 = 0.61$ and $VR_c = 159$.

parameter, and then approaches asymptotically the maximum vortex size reached for $VR \rightarrow \infty$. The value of VR at which the vortex practically reaches its maximum size ($\sim 0.9 y_{max}$) coincides with the onset of the second set of recirculations.

4.4. Effect of the width ratio (WR)

The effect of the width ratio was also examined numerically using two-dimensional calculations under creeping flow conditions. In figure 11, we show the flow patterns for two distinct width ratios: $WR = 0.3$ and 3.

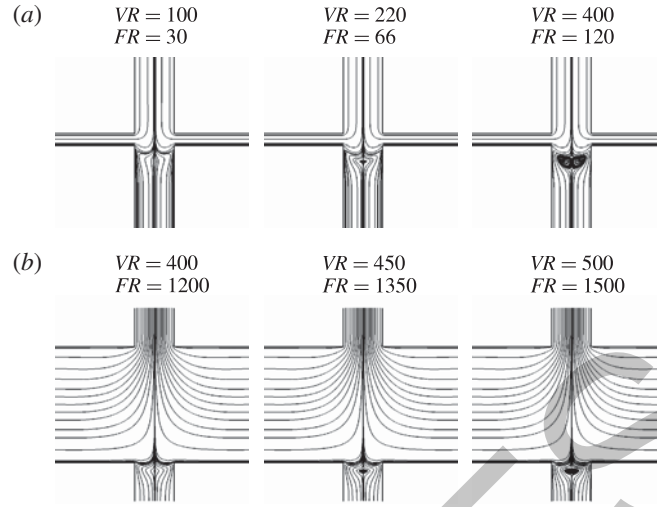


FIGURE 11. Flow patterns obtained numerically under creeping flow through a 2D flow-focusing geometry with (a) $WR = 0.3$ and (b) $WR = 3$.

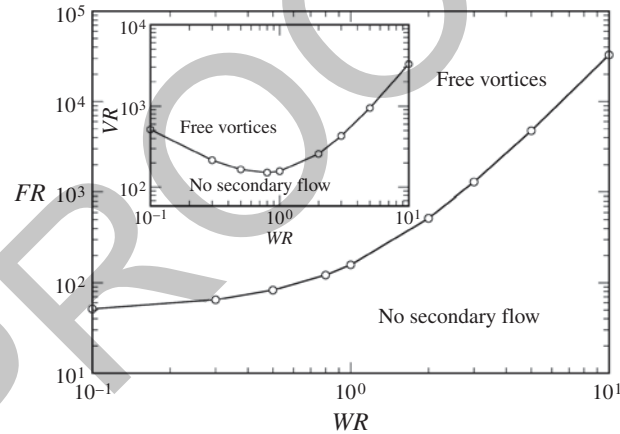


FIGURE 12. Effect of WR on the critical flow-rate ratio and on the critical velocity ratio (inset) for the onset of secondary flow (2D flow, $Re = 0$).

356 The behaviour observed for $0.1 \leq WR \leq 10$ is qualitatively similar to that observed
 357 for $WR = 1$, i.e. as VR increases, the divergent character of the streamlines is
 358 enhanced, followed by the formation and subsequent growth of central recirculations.
 359 However, the critical value of VR for the onset of the central recirculations depends on
 360 WR , as shown in the inset of figure 12. The transition envelope exhibits non-monotonic
 361 behaviour with the minimum value of the critical VR attained for $WR \approx 0.8$. However,
 362 in terms of flow-rate ratio (remember that $FR = VR \times WR$), the variation of its critical
 363 value with WR is monotonic (see figure 12).

364 The vortex size was also measured as a function of VR for different values of WR ,
 365 which are shown in the inset of figure 13. All the curves show the same shape, and

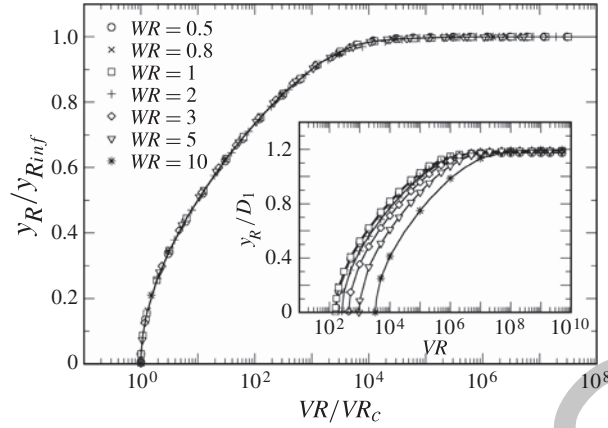


FIGURE 13. Vortex size under creeping flow conditions for various WR (2D flow, $WR = 1$).

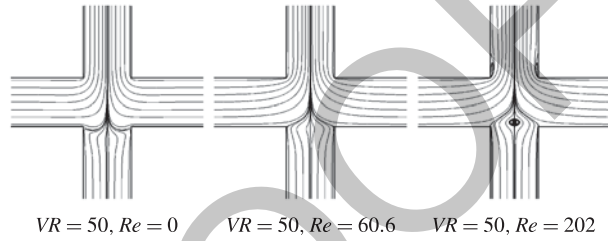


FIGURE 14. Effect of Re on the flow patterns through a 2D flow-focusing geometry with $VR = 50$ ($WR = 1$).

tend to maximum vortex sizes reached at $VR \rightarrow \infty$ (y_{Rinf}), which is almost independent of WR . Once again, all the curves can be collapsed onto a master curve by appropriate normalization, as shown in the main plot of figure 13, in which the vortex size is normalized using y_{Rinf} and VR is normalized by the critical velocity ratio for the onset of vortex formation.

4.5. Effect of inertia

The effect of inertia on the development of secondary flow was analysed at a constant width ratio ($WR = 1$). To account for inertial effects, we define the Reynolds number in terms of the exit channel quantities: $Re = \rho U_3 D_3 / \mu$.

In figure 14, we show the effect of Re on the flow patterns for $VR = 50$, which did not exhibit free vortices under creeping flow conditions. Inertia pushes the divergent streamline region forward into the centre of the flow-focusing device and promotes the onset of central vortices, which appear at $Re \approx 140$, therefore inducing a destabilizing effect by promoting free vortices at lower values of VR . Also note the existence of small lip vortices on the downstream corners for $Re = 202$, an expected consequence of flow inertia in the flow in a re-entrant corner.

The effect of Re on the critical value of the VR for the onset of central vortices is shown in figure 15. It is clear that inertia prompts the transition to secondary flow to occur at lower values of VR . Even though inertia accelerates the appearance of free vortices, we should note that for low VR (eg. $VR = 10$) free vortex formation is not

366
367
368
369
370

371
372
373
374
375
376
377
378
379
380
381
382
383
384
385

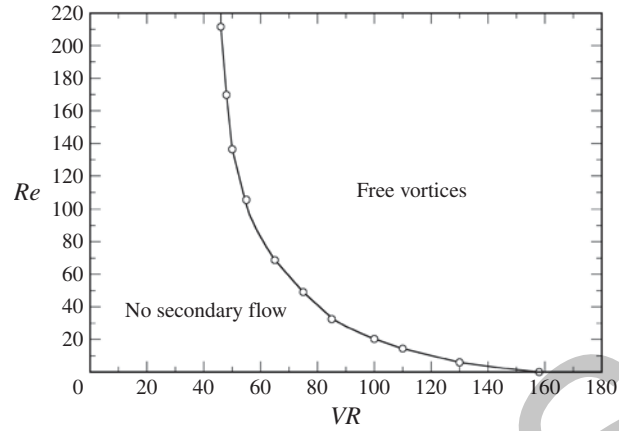


FIGURE 15. Stability map: effect of Re on the critical velocity ratio for the onset of free vortices (2D flow, $WR = 1$).

386 observed for the whole range of Reynolds numbers tested ($0 \leq Re \lesssim 210$), while for
 387 high VR (e.g. $VR = 1000$) free vortices are always present even under creeping flow
 388 conditions, as shown in figure 3.

389 We should emphasize that in the case of inertial flows, it is not possible to use the
 390 superposition principle described in § 4.1 for creeping flows and the linear combination
 391 of two independent results is no longer a solution of the Navier–Stokes equation due
 392 to the presence of the nonlinear advective term; in these cases, the critical Re was
 393 determined numerically for each VR .

394 5. Three-dimensional results

395 In this section we compare the results obtained experimentally in a microfluidic
 396 channel of constant depth, as described in § 2, and those obtained numerically in the
 397 corresponding three-dimensional geometry (with top and bottom bounding walls) under
 398 equivalent flow conditions.

399 Figure 16 shows the flow patterns observed maintaining Q_1 constant while varying
 400 Q_2 (and therefore varying VR and Re simultaneously). The grey-scale images were
 401 acquired at the channel centre plane using streak photography and the red lines are
 402 centre plane streamlines predicted numerically. Recirculations are also observed in
 403 this case, but its open three-dimensional structure is clearly distinct from the closed
 404 recirculations obtained in the numerical calculations for two-dimensional creeping flow
 405 shown in § 4. Good agreement is obtained between experimental observations and
 406 three-dimensional numerical predictions, both in terms of the critical conditions for the
 407 appearance of recirculations and in terms of the flow patterns.

408 In figure 17(a), we show a three-dimensional view of the flow-focusing device with
 409 representative pathlines obtained numerically to highlight the three-dimensionality of
 410 the flow. This example corresponds to that shown in figure 16(d), and we can see
 411 that the fluid enters the recirculation at the centre plane, rotates towards its eye and
 412 exits the recirculation moving towards the top/bottom bounding walls. Evidence for
 413 this three-dimensionality is also observed experimentally (figure 17b) by injecting a
 414 dyed solution (using Rhodamine B) as described in § 2. Using this technique we can
 415 observe that most of the fluid entering through the central mainstream channel (dyed

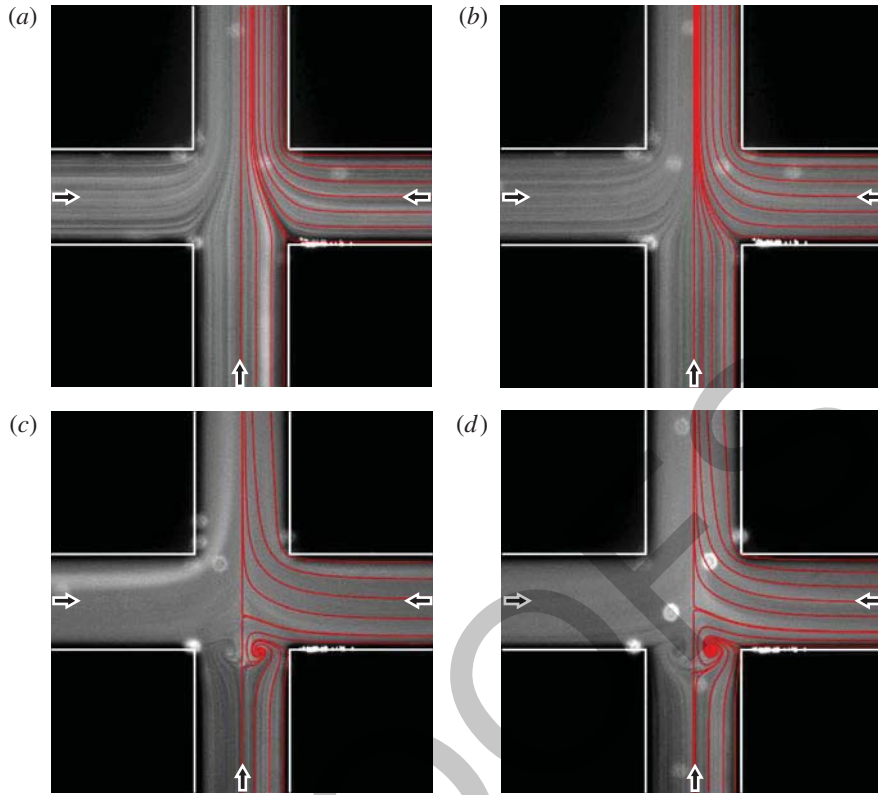


FIGURE 16. (Colour online) Flow patterns in the 3D flow-focusing geometry for varying VR and Re . Comparison between experimental (grey-scale images) and numerical pathlines (red lines) at the centre plane. (a) $Q_1 = 0.3 \text{ ml h}^{-1}$, $Q_2 = 0.3 \text{ ml h}^{-1}$, $VR = 1$, $Re = 2.8$; (b) $Q_1 = 0.3 \text{ ml h}^{-1}$, $Q_2 = 0.9 \text{ ml h}^{-1}$, $VR = 3$, $Re = 6.5$; (c) $Q_1 = 0.3 \text{ ml h}^{-1}$, $Q_2 = 15 \text{ ml h}^{-1}$, $VR = 50$, $Re = 94.2$; (d) $Q_1 = 0.3 \text{ ml h}^{-1}$, $Q_2 = 18 \text{ ml h}^{-1}$, $VR = 60$, $Re = 113$.

with Rhodamine B) exits the device close to the sidewalls and at a plane that is closer to the bounding walls, where the fluorescence of the Rhodamine B dye can still be perceived, albeit with a lower intensity than in the central entrance channel. Indeed, the dyed region in the exit channel matches closely the projection of the three-dimensional numerical pathlines (see figure 17b).

In figure 18 we show a flow classification map in the VR – Re parameter space. For each set of flow conditions (VR , Re), we determined whether or not vortices were present and this is identified by different symbols. Each thin solid line corresponds to numerical simulations obtained for a constant value of Q_1 (and varying Q_2). From this map it is clear that inertia has a destabilizing effect, inducing the appearance of recirculations at lower critical VR than under creeping flow conditions. In the limit of $VR = 0$, no steady central vortices are seen in the range of Re tested. On the contrary, the bounding walls have a stabilizing effect for low Re flow conditions, delaying the onset of the central vortices (compare the critical value of VR under creeping flow conditions for the three-dimensional case ($VR \approx 628$) with that for the two-dimensional case presented in § 4.1 ($VR \approx 159$)). Interestingly, at high Re the opposite trend is found and the bounding walls actually have a destabilizing effect, as is clear from a

416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432

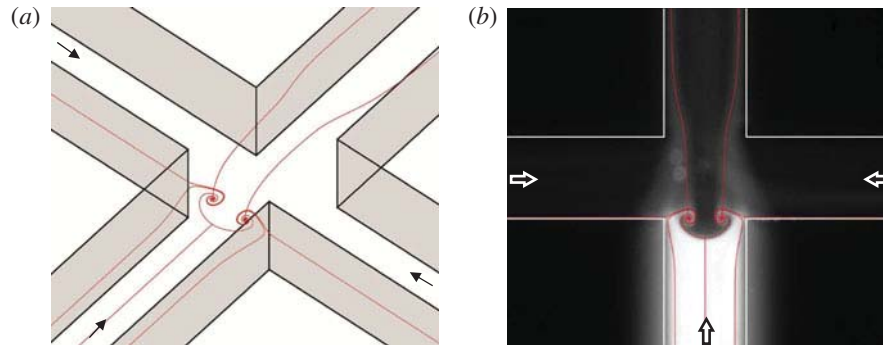


FIGURE 17. (Colour online) The 3D nature of the flow ($VR = 60$, $Re = 113$, $Q_1 = 0.3 \text{ ml h}^{-1}$, $Q_2 = 18 \text{ ml h}^{-1}$). (a) Three-dimensional view of the flow-focusing device with representative streamlines obtained numerically (in red) showing that the flow is highly three-dimensional with the fluid entering the recirculation near the centre plane, rotating towards its eye and exiting close to the top/bottom bounding walls. (b) Comparison between the experimental photograph (grey-scale image) at the central plane obtained when Rhodamine is injected in the main central channel and a projection of the numerical streamlines (in red).

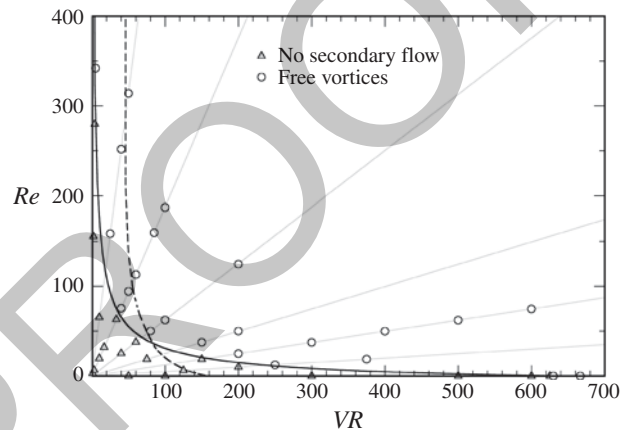


FIGURE 18. Flow classification map in the $VR-Re$ domain (3D flow, $WR = 1$). The thick solid line highlights the critical values for the onset of free vortices. The dashed line is that of figure 15 for 2D flow.

433 comparison between the solid and dashed lines in figure 18, marking the transition for
 434 the three-dimensional and two-dimensional geometries, respectively.

435 6. Conclusions

436 We performed a systematic numerical and experimental study on Newtonian fluid
 437 flow through microfluidic devices in which hydrodynamic flow focusing is produced
 438 using two balanced lateral sheath streams that shape a third inlet stream. In particular,
 439 we focus on the onset and enhancement of symmetrical wall-detached recirculations
 440 that form near the centreline above a critical value of the ratio of inlet average
 441 velocities. Two- and three-dimensional numerical calculations were performed using

a finite volume method, and comparison of the three-dimensional results with the experimental flow visualizations shows very good agreement.

We demonstrate that central vortices arise above a critical velocity ratio and are preceded by the onset of diverging streamlines despite the hydrodynamic focusing imposed by the lateral sheath streams. Recirculation growth was observed as VR was increased, but was shown to be limited by the formation of a second recirculation of lower intensity upstream of the primary one. The effect of the width ratio was studied numerically, and it was shown that the critical VR above which the recirculations are observed depends non-monotonically on this geometrical parameter. In addition, we were able to show that vortex formation occurs even under creeping flow conditions, despite flow inertia enhancing its appearance. In contrast, the presence of the walls in three-dimensional geometries has a stabilizing effect at low Re , delaying the onset of these recirculations, which are no longer closed recirculations.

Most importantly, we show for this complex flow the implications of Stokes flow theory, since under creeping flow conditions we are able to predict the flow field for any VR by combining linearly the results corresponding to any two other independent solutions (e.g. $VR = 0$ and $VR \rightarrow \infty$) in the same geometry. This approach allows us to explain why vortices form upstream of the central region near the vertical centreline and also to predict the critical value of VR for the onset of central vortices without having to perform additional experiments or numerical calculations under creeping flow conditions.

Acknowledgements

The authors acknowledge the funding support provided by Fundação para a Ciência e a Tecnologia (FCT), COMPETE and FEDER through projects PTDC/EME-MFE/099109/2008, PTDC/EME-MFE/114322/2009, PTDC/EQU-FTT/118716/2010, REEQ/928/EME/2005.

REFERENCES

- ALVES, M. A., OLIVEIRA, P. J. & PINHO, F. T. 2003 A convergent and universally bounded interpolation scheme for the treatment of advection. *J. Non-Newtonian Fluid Mech.* **41**, 47–75.
- ALVES, M. A. & POOLE, R. J. 2007 Divergent flow in contractions. *J. Non-Newtonian Fluid Mech.* **144**, 140–148.
- ANNA, S. L., BONToux, N. & STONE, H. A. 2003 Formation of dispersions using ‘flow focusing’ in microchannels. *Appl. Phys. Lett.* **82**, 364–366.
- ANNA, S. L. & MAYER, H. C. 2006 Microscale tipstreaming in a microfluidic flow. *Phys. Fluids* **18**, 121512.
- ARRATIA, P. E., GOLLUB, J. P. & DURIAN, D. J. 2008 Polymeric filament thinning and breakup in microchannels. *Phys. Rev. E* **77**, 036309.
- BIRD, R. B., ARMSTRONG, R. C. & HASSAGER, O. 1987 *Dynamics of Polymeric Liquids, vol. 1: Fluid Dynamics*. Wiley.
- BOGER, D. V. & BINNINGTON, R. J. 1990 Circular entry flows of fluid M1. *J. Non-Newtonian Fluid Mech.* **35**, 339–360.
- CAMPO-DEAÑO, L., GALINDO-ROSALES, F. J., PINHO, F. T., ALVES, M. A. & OLIVEIRA, M. S. N. 2011 Flow of low viscosity Boger fluids through a microfluidic hyperbolic contraction. *J. Non-Newtonian Fluid Mech.* **166**, 1286–1296.
- CHIANG, T. P., SHEU, T. W. H. & WANG, S. K. 2000 Side wall effects on the structure of laminar flow over a plane-symmetric sudden expansion. *Comp. Fluids* **29**, 467–492.

- 489 DENDUKURI, D. & DOYLE, P. S. 2009 The synthesis and assembly of polymeric microparticles
490 using microfluidics. *Adv. Mater.* **21**, 1–16.
- 491 ESCUDIER, M. 1988 Vortex breakdown: observations and explanations. *Prog. Aerosp. Sci.* **25**,
492 189–229.
- 493 EVANS, R. E. & WALTERS, K. 1989 Further remarks on the lip-vortex mechanism of vortex
494 enhancement in planar-contraction flows. *J. Non-Newtonian Fluid Mech.* **32**, 95–105.
- 495 GARSTECKI, P., STONE, H. A. & WHITESIDES, G. M. 2005 Mechanism for flowrate controlled
496 breakup in confined geometries: a route to monodisperse emulsions. *Phys. Rev. Lett.* **94**,
497 164501.
- 498 HULSEN, M. A. 1993 Numerical simulation of the divergent flow regime in a circular contraction
499 flow of a viscoelastic fluid. *Theor. Comput. Fluid Dyn.* **5**, 33–48.
- 500 JAMES, D. F., CHANDLER, G. M. & ARMOUR, S. J. 1990 A converging channel rheometer for the
501 measurement of extensional viscosity. *J. Non-Newtonian Fluid Mech.* **35**, 421–443.
- 502 JENSEN, K. 1998 Chemical kinetics: smaller, faster chemistry. *Nature* **393**, 735–737.
- 503 KNIGHT, J. B., VISHWANATH, A., BRODY, J. P. & AUSTIN, R. H. 1998 Hydrodynamic focusing
504 on a silicon chip: mixing nanoliters in microseconds. *Phys. Rev. Lett.* **80**, 3863–3866.
- 505 LEIBOVICH, S. 1978 The structure of vortex breakdown. *Annu. Rev. Fluid Mech.* **10**, 221–246.
- 506 LUCCA-NEGRO, O. & O'DOHERTY, T. 2001 Vortex breakdown: a review. *Prog. Energy Combust.*
507 *Sci.* **27**, 431–481.
- 508 LUO, W.-J. 2009 Effect of ionic concentration on electrokinetic instability in a cross-shaped
509 microchannel. *Microfluid. Nanofluid.* **6**, 189–202.
- 510 McDONALD, J. C., DUFY, D. C., ANDERSON, J. R., CHIU, D. T., WU, H. & WHITESIDES,
511 G. M. 2000 Fabrication of microfluidic systems in poly (dimethylsiloxane). *Electrophoresis*
512 **21**, 27–40.
- 513 MEINHART, C. D., WERELEY, S. T. & GRAY, M. H. B. 2000 Volume illumination for
514 two-dimensional particle image velocimetry. *Meas. Sci. Technol.* **11**, 809–814.
- 515 MOFFATT, H. K. 1964 Viscous and resistive eddies near a sharp corner. *J. Fluid Mech.* **18**, 1–18.
- 516 NIE, Z., SEO, M., XU, S., LEWIS, P. C., MOK, M., KUMACHEVA, E., WHITESIDES, G. M.,
517 GARSTECKI, P. & STONE, H. A. 2008 Emulsification in a microfluidic flow-focusing device:
518 effect of the viscosities of the liquids. *Microfluid. Nanofluid.* **5**, 585–594.
- 519 NISISAKO, T., TORII, T. & HIGUCHI, T. 2004 Novel microreactors for functional polymer beads.
520 *Chem. Engng J.* **101**, 23–29.
- 521 OLIVEIRA, P. J. 2003 Asymmetric flows of viscoelastic fluids in symmetric planar expansion
522 geometries. *J. Non-Newtonian Fluid Mech.* **114**, 33–63.
- 523 OLIVEIRA, M. S. N., ALVES, M. A., MCKINLEY, G. H. & PINHO, F. T. 2007 Viscous flow
524 through microfabricated hyperbolic contraction. *Exp. Fluids* **43**, 437–451.
- 525 OLIVEIRA, P. J. & PINHO, F. T. 1999 Numerical procedure for the computation of fluid flow with
526 arbitrary stress–strain relationships. *Numer. Heat Transfer B* **35**, 295–315.
- 527 OLIVEIRA, P. J., PINHO, F. T. & PINTO, G. A. 1998 Numerical simulation of nonlinear elastic
528 flows with a general collocated finite-volume method. *J. Non-Newtonian Fluid Mech.* **79**,
529 1–43.
- 530 OLIVEIRA, M. S. N., PINHO, F. T., POOLE, R. J., OLIVEIRA, P. J. & ALVES, M. A. 2009
531 Purely elastic flow asymmetries in flow-focusing devices. *J. Non-Newtonian Fluid Mech.* **160**,
532 31–39.
- 533 OLIVEIRA, M. S. N., RODD, L. E., MCKINLEY, G. H. & ALVES, M. A. 2008 Simulations of
534 extensional flow in microrheometric devices. *Microfluid. Nanofluid.* **5**, 809–826.
- 535 PHAN-THIEN, N. & TANNER, R. I. 1977 A new constitutive equation derived from network theory.
536 *J. Non-Newtonian Fluid Mech.* **2**, 353–365.
- 537 RODD, L. E., SCOTT, T. P., BOGER, D. V., COOPER-WHITE, J. J. & MCKINLEY, G. H. 2005 The
538 inertio-elastic planar entry flow of low-viscosity elastic fluids in micro-fabricated geometries.
539 *J. Non-Newtonian Fluid Mech.* **129**, 1–22.
- 540 SOULAGES, J., OLIVEIRA, M. S. N., SOUSA, P. C., ALVES, M. A. & MCKINLEY, G. H.
541 2009 Investigating the stability of viscoelastic stagnation flows in T-shaped microchannels.
542 *J. Non-Newtonian Fluid Mech.* **163**, 9–24.

- SOUSA, P. C., COELHO, P. M., OLIVEIRA, M. S. N. & ALVES, M. A. 2011 Laminar flow in three-dimensional square-square expansions. *J. Non-Newtonian Fluid Mech.* **166**, 1033–1048. 543
544
- TOWNSEND, P. & WALTERS, K. 1994 Expansion flows of non-Newtonian liquids. *Chem. Engng Sci.* **49**, 749–763. 545
546
- TSAI, C.-H., CHEN, H.-T., WANG, Y.-N., LIN, C.-H. & FU, L.-M. 2006 Capabilities and limitations of two-dimensional and three-dimensional numerical methods in modelling the fluid flow in sudden expansion microchannels. *Microfluid. Nanofluid.* **3**, 13–18. 547
548
549

PROOFS