

1 **Investigation of ship cooling system operation for improving energy efficiency**

2 **Gerasimos Theotokatos^{1*}, Konstantinos Sfakianakis² and Dracos Vassalos¹**

3 1. Department of Naval Architecture, Ocean and Marine Engineering, University of Strathclyde, G4 0LZ, Glasgow, UK

4 2. Department of Electronic and Electrical Engineering, University of Strathclyde, G1 1XW, Glasgow, UK

5 * Corresponding author: Tel.: +44(0)1415483462 e-mail address: gerasimos.theotokatos@strath.ac.uk

6
7

8 **Abstract**

9
10 The application of recently introduced IMO regulations for reduction of CO₂ gaseous emissions as well as the initiatives
11 for greener shipping, rendered the efforts for improving on-board energy systems performance to be of high priority.
12 This study focuses on the investigation of the on-board operation of the combined sea/fresh water cooling system of a
13 merchant ship. The detailed model of a cooling system is presented based on energy and mass conservation laws. The
14 simulation input data includes the system geometry and arrangement, the operational characteristics of cooling pumps,
15 the control scenarios for the system valves as well as data for calculating the pipes friction and minor losses coefficients,
16 wherefrom the system performance parameters can be calculated. The cooling system energy consumption was
17 estimated considering a typical annual ship operational profile. Two cases were investigated; first, a conventional case
18 of controlling the sea water and fresh water temperatures by using three-way valves and, second, a more sophisticated
19 case of installing variable speed motors for driving the system pumps. The obtained results are compared in terms of
20 annual power consumption leading to conclusions about the system performance. The developed models can be used as
21 an assessment tool for improving shipboard power demand early in the design stage and, also, during operation.

22

23 **Keywords:** Ship piping systems; cooling system, modelling; ship energy efficiency; variable speed pump

24 operation.

25

26 **1 Introduction**

27 The last decade, ships energy efficiency and environmental performance have been of highest importance in shipping
28 industry due to the fuel oil prices increase and the stringent emissions legislation concerning greenhouse gas emissions
29 [1]. In this respect, the shipping industry has intensified its efforts for reducing ships energy consumption and gas
30 emissions. Inevitably, the area of interest for many research groups and industry is focused on the performance
31 improvement of the major on-board energy consumers, i.e. propulsion plants, hull/propeller etc. However, the ship
32 auxiliary systems have not been attracted much attention, since their contribution to the total energy consumption is
33 substantially lower than the respective one of the ship propulsion system.

34 The majority of the ship electrical energy utilisers include pumps, compressors and fans/blowers. Since the ship cooling
35 systems usually comprise the largest ship pumps and operate for the majority of the ship lifetime, they are considered of
36 vital importance in terms of improving the ship energy efficiency. Presently, the standard design methods for the cooling
37 systems are based on considering the worst case scenarios e.g. tropical conditions and all the ship engines/machinery
38 operating at their maximum load. As a consequence, the installed on-board systems are oversized and in turn, they
39 demand a significantly greater amount of energy. Therefore, there is enough space for energy efficiency improvement at
40 the design stage as well as during operation considering the introduction of new available technologies, such as variable
41 frequency drives [2].

42 The typical pumps that are used by the shipping industry work at a constant speed under the rated (nominal) frequency
43 (usually 60 Hz) without taking into consideration the real system thermal power needs. In addition, the on-board system
44 fluid flow control is performed with the use of bypass branches and/or throttling valves [2]. It is inevitable that the
45 commonly used techniques end up to the system inefficient operation and therefore, energy saving technologies can be
46 utilized as potential solutions [2-3]. In this respect, the pump motor speed control using Variable Frequency Drives
47 (VFD) might be an effective solution that has not been adapted yet to a great extent in the shipping industry [4]. The
48 energy saving is based on the concept of reducing the system operating pumps speed, and therefore, lowering the
49 required power demand for the cases where the system operates in lower heat capacity conditions , which can be
50 accommodated by reducing the cooling water flow rate.

51 Despite the importance of the applying energy saving technologies in ship systems, only limited published works have
52 been found dealing with modelling, control and energy savings for the ship cooling system. In [5], a model capable of
53 predicting the transient response of a merchant ship cooling system was developed and verified against measured data.
54 Subsequently, it was used for investigating the influence of the controller parameters on the system behaviour. In [6], a
55 similar methodology was followed to develop an appropriate linearised model capable of predicting the transient

56 response of a containership cooling system. Based on this, two different control designs were investigated under various
57 operating conditions for controlling the sea water and fresh water temperature. In [3], the energy savings that can be
58 achieved by using a VFD on the cooling system pumps of two different ships were investigated considering fixed
59 thermal energy demand and varying sea water temperature for the ship voyages throughout the period of one year. In
60 this respect, further studies on the integrated sea water-fresh water cooling system investigation that consider the
61 varying operating conditions and actual ship engines operating profiles are quite useful for providing insight to the
62 overall system operation and the expected benefits for applying energy saving techniques.

63 The aim of this study is to realistically estimate the annual energy consumption of the integrated sea water/fresh water
64 cooling system of a typical handymax bulk carrier for two different operation methods, namely constant speed and
65 variable speed pump operation. The system was modelled by applying the energy and mass conservation equations in its
66 components, whereas a typical annual operating profile was considered for the ship main and auxiliary engines. The
67 model results, which include the head, volumetric flow rate and temperature of all system branches, as well as the pumps
68 required power, were analysed and the ship annual energy saving potential was discussed.


69

70 **2 System Description**

71 Typical ship cooling water systems consist of three parts: the sea water (SW) cooling system, the low temperature (LT)
72 fresh water cooling system and the high temperature (HT) fresh water cooling system, as shown in Figure 1. Since the
73 seawater causes corrosion issues, fresh water is used for cooling the ship main and auxiliary machinery. Thus, one or
74 more central coolers are installed on-board for cooling the hot fresh water exiting the ship machinery and heat
75 exchangers by using sea water.

76 The seawater system comprises a number of water pumps connected in parallel. Usually two main pumps (one
77 operating and one standby) and one smaller pump for operation at harbour are required; however three same main
78 pumps could also be used provided that the two pumps have to supply the cooling water flow rate required to cover the
79 design point operation (maximum flow rate scenario) [7]. The pumps function is to provide sea water to the central
80 cooler(s) in order to remove the required heat from the fresh water. The sea water system pumps have to maintain the
81 required flow rate and to provide the pressure increase required for covering the system pressure losses (induced to the
82 system pipe lines, fittings and components) and the elevation of sea water. For the case where the pump operates at
83 constant speed, the sea water flow rate is almost constant (although it depends on the system valves settings and the
84 components fouling/corrosion condition), and therefore the temperature of the sea water exiting the central cooler varies
85 with the cooler heat capacity, which depends on the serviced systems operating conditions. For the case where variable

86 pump speed is used, the pump speed can be adjusted, so that the sea water flow matches the actual central cooler heat
 87 capacity and thus, the temperature of the sea water exiting the central cooler can be kept constant.

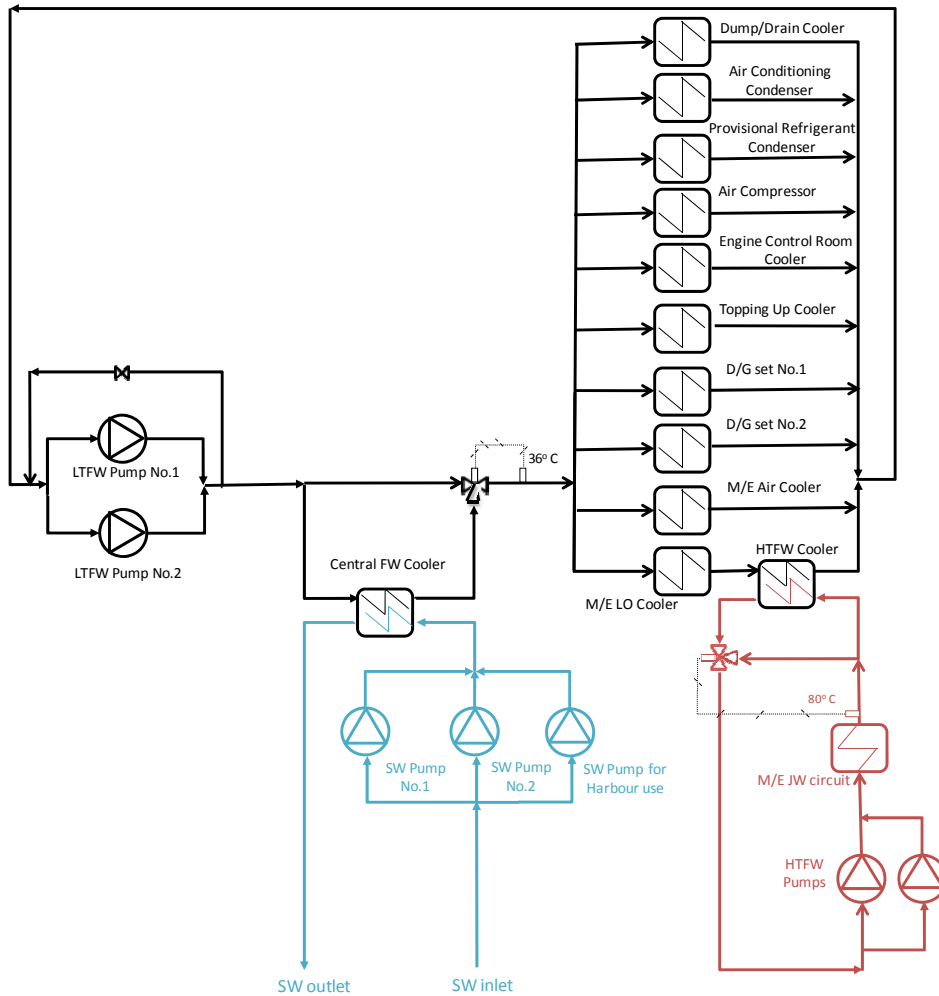

88
 89 Figure 1: Bulk carrier integrated sea water/fresh water cooling water system diagram

90 The LT fresh water cooling system employs two (three in some cases) pumps [7] to service the main engine (M/E)
 91 (scavenging air cooler, lubricating oil cooler and HT fresh water cooler) and the auxiliary machinery components
 92 (Diesel-Electric generator (D/G) sets, air compressor, topping up cooler, dump drain cooler etc.). The temperature of the
 93 fresh water entering the system coolers is controlled by a three-way valve, which is continuously adjusted to maintain
 94 the temperature level at 36°C. When the system operating conditions differ from the system design point (less heat has
 95 to be removed), the three-way valve mixes a flow at a lower temperature exiting from central cooler and a hotter
 96 by-pass flow (returning from system coolers and components). That is required since the low temperature fresh water
 97 pumps operate in constant speed and therefore, their flow rate does not depend on the serviced machinery instantaneous
 98 heat capacity. On the other hand, in the case of the variable pump speed, the flow rate can match the actual needs of the
 99 system and therefore, the three-way valve can remain in a position where the by-pass flow is zero.


100 The HT fresh water cooling system uses two pumps connected in parallel (one operates whilst the other remains standby)

101 to provide water for cooling the engine metallic parts (jacket cooling water circuit). For the pump constant speed
 102 operation, the temperature of the water exiting the engine is indirectly adjusted to around 80°C (as proposed by the
 103 engine manufacturer, although this depends on the engine settings) by using a three-way valve that mixes a water flow
 104 at lower temperature exiting the HT fresh water cooler and the hot water flow exiting the engine. This is not required for
 105 the case of variable speed pump, where the pump speed is adjusted, so that the water flow exiting the engine is kept at
 106 the required temperature of 80°C.

107

108 3 System modelling

109 In this work, the steady state operation of the integrated system of sea water/fresh water cooling system that is shown in
 110 Figure 2 was modelled. The governing equations were derived by applying the continuity equation in the system nodes,
 111 the extended Bernoulli equation in the system branches and the energy conservation equation in the system heat
 112 exchangers/coolers.

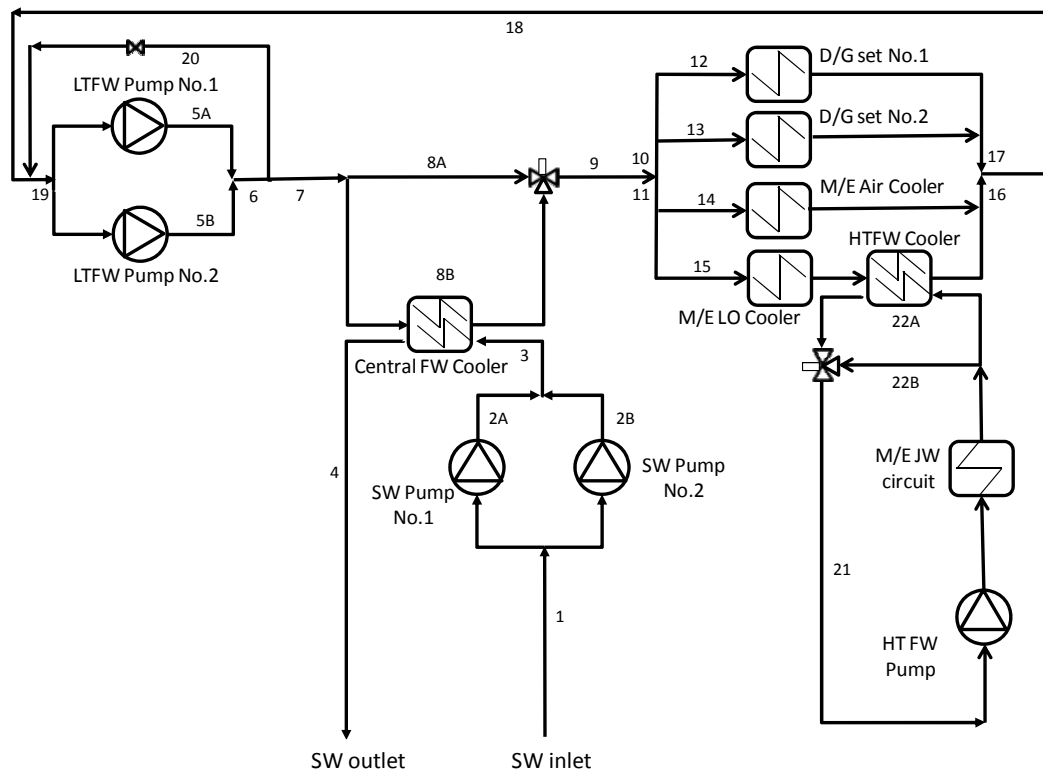

113

114

Figure 2: Modelled cooling water system layout

115 The head loss (in meters) of the system branches is calculated by taking into account the friction loss and the fittings
 116 loss (valves, elbows, etc.) according to the following equation:

$$117 \quad \Delta h_{loss,i} = \left(f_i \frac{L_i}{D_i} + \sum K_i \right) \frac{\dot{V}_i^2}{2gA_i^2} \quad (1)$$

118 where i denotes the i^{th} branch, f is the friction factor, L is the pipe length, D is the pipe hydraulic diameter, ΣK is the sum
 119 of loss coefficients of the fittings along the considered branch, g is the gravitational acceleration, \dot{V} is the volumetric
 120 flow rate and A is the pipe internal cross-section area.

121 The friction factor is a function of Reynolds number for the laminar flow mode, whilst it can be calculated as a function of
 122 Reynolds number and the relative roughness for the turbulent flow mode by using various equations of implicit or explicit
 123 form. In this work, the Haaland equation [8] was used for calculating the friction factor as it has low computational cost
 124 and adequate accuracy exhibiting a maximum error of 1.4% according to [9]:

$$125 \quad f^{-0.5} = -1.8 \log_{10} \left[\left(\frac{e/D}{3.7} \right)^{1.11} + \frac{6.9}{Re} \right] \quad (2)$$

126 where e/D denotes the relative roughness and Re is Reynolds number.

127 The head loss of each cooler is calculated by using the following equation:

$$128 \quad \Delta h_{HE,j} = K_{HE,j} \dot{V}_j^2 \quad (3)$$

129 where j denotes the j^{th} heat exchanger, K_{HE} is the heat exchanger loss coefficient and \dot{V} is the volumetric flow rate.

130 The heat exchanger loss coefficient can be calculated based on the heat exchangers manufacturers' data or the methods
 131 reported in [10]. Typical values for the maximum (permitted) pressure drop lay in the range from 0.7 to 1 bar at the
 132 nominal flow point [10-11].

133 The head increase of each pump (in meters) is usually expressed in the form of the pump characteristic curves, in which
 134 the pump head is plotted against the volumetric flow rate. For the case of centrifugal pumps, a second order polynomial
 135 equation can represent the pump characteristic curve. Thus, the pump head is calculated according to the following
 136 equation:

$$137 \quad \Delta h_{p,i} = a \dot{V}_i^2 + b \dot{V}_i + c \quad (4)$$

138 where i denotes the i^{th} pump, \dot{V} is the pump volumetric flow rate and a , b , c are constants.

139 For each heat exchanger, the energy conservation provides the following equation:

$$140 \quad \dot{Q}_{HE} = \dot{V} \rho c_p (T_o - T_{in}) \Big|_{cold} = \dot{V} \rho c_p (T_{in} - T_o) \Big|_{hot} \quad (5)$$

141 where \dot{Q}_{HE} is the heat transferred from the hot fluid to the cold fluid, ρ is the fluid density, c_p is the fluid specific heat at
 142 constant pressure, T_{in} is the fluid inlet temperature and T_{out} is the fluid outlet temperature.

143 Considering that there is no heat losses on the system heat exchangers, the energy balance results in the following
 144 equations:

$$145 \quad \dot{Q}_{CC} = \sum \dot{Q}_{LT,i}, \quad \dot{Q}_{HTFW} = \dot{Q}_{ME,JW} \quad (6)$$

146 where i denotes the i^{th} heat exchanger of the LT cooling system, \dot{Q}_{CC} is the central cooler heat capacity, $\dot{Q}_{LT,i}$ is the heat
 147 capacity of i^{th} heat exchanger of LT cooling system, \dot{Q}_{HTFW} is the HTFW cooler heat capacity and $\dot{Q}_{ME,JW}$ is the M/E
 148 jacket water circuit heat capacity.

149 The extended Bernoulli equation applied to the system branches provides the formulas given below.

150 Sea Water cooling system

$$151 \quad \Delta h_{p,2A} - \Delta z - \sum_{i=1+4} \Delta h_{\text{loss},i} - K_{CC} \dot{V}_3^2 = 0 \quad (7)$$

152 When the LT fresh water pumps operate simultaneously the following equation has to be additionally taken into account:

$$153 \quad \Delta h_{p,2A} - \Delta h_{\text{loss},2A} - \Delta h_{p,2B} + \Delta h_{\text{loss},2B} = 0 \quad (8)$$

154 Low Temperature fresh water cooling system

$$155 \quad \Delta h_{p,5A} - \sum_{\substack{i=5A,6-7,8A,9-10, \\ 12,17-19}} \Delta h_{\text{loss},i} - K_{HE,12} \dot{V}_{12}^2 = 0 \quad (9)$$

$$156 \quad \Delta h_{\text{loss},12} + K_{HE,12} \dot{V}_{12}^2 - \Delta h_{\text{loss},13} - K_{HE,13} \dot{V}_{13}^2 = 0 \quad (10)$$

$$157 \quad \Delta h_{\text{loss},10} + \Delta h_{\text{loss},12} + K_{HE,12} \dot{V}_{12}^2 + \Delta h_{\text{loss},17} \\ - \Delta h_{\text{loss},11} - \Delta h_{\text{loss},14} - K_{HE,14} \dot{V}_{14}^2 - \Delta h_{\text{loss},16} = 0 \quad (11)$$

$$158 \quad \Delta h_{\text{loss},14} + K_{HE,14} \dot{V}_{14}^2 - \Delta h_{\text{loss},15} \\ - (K_{HE,15} + K_{HTFW}) \dot{V}_{15}^2 = 0 \quad (12)$$

$$159 \quad \Delta h_{\text{loss},8A} - \Delta h_{\text{loss},8B} = 0 \quad (13)$$

$$160 \quad \Delta h_{\text{loss},19} + \Delta h_{\text{loss},5A} + \Delta h_{\text{loss},16} - \Delta h_{\text{loss},20} = 0 \quad (14)$$

$$161 \quad \Delta h_{p,5A} - \Delta h_{\text{loss},5A} - \Delta h_{p,5B} + \Delta h_{\text{loss},5B} = 0 \quad (15)$$

162 High Temperature fresh water cooling system

$$163 \quad \Delta h_{p,21} - \sum_{i=21,22A} \Delta h_{\text{loss},i} - K_{HTFW} \dot{V}_{22A}^2 - K_{ME,JW} \dot{V}_{21}^2 = 0 \quad (16)$$

$$164 \quad \Delta h_{\text{loss},22A} - \Delta h_{\text{loss},22B} = 0 \quad (17)$$

165 The continuity equation applied in each system node and considering incompressible flow gives the following equations:

$$166 \quad \sum \dot{V}_i = 0 \quad (18)$$

167 In the nodes where mixing of two flows occurs, the energy conservation provides the following equation:

$$168 \quad \dot{V}_{in,1} \rho_{in,1} c_{p,in,1} T_{in,1} + \dot{V}_{in,2} \rho_{in,2} c_{p,in,2} T_{in,2} = \dot{V}_o \rho_o c_{p,o} T_o \quad (19)$$

169 Pumps power calculation

170 The electric power that is needed for the pumps operation is calculated according to the following equation [12]:

$$171 \quad P_{el,i} = \rho g \dot{V}_{p,i} \Delta h_{p,i} / \eta_i \quad (20)$$

172 where i denotes the i^{th} pump, η is the pump assembly efficiency that includes the pump, the motor and the variable speed
 173 drive efficiencies, i.e.:

$$174 \quad \eta_i = \eta_{p,i} \eta_m \eta_d \quad (21)$$


175 The motor and drive efficiencies can be estimated according to the data provided in [13]. The considered variable speed
 176 drive efficiency as a function of its load percentage is shown in Figure 3. The maximum pump efficiency was estimated
 177 based on the volumetric flow rate and specific speed [12]. Then, the pump efficiency as function of its volumetric flow
 178 rate was estimated using the maximum pump efficiency, the specific speed and the normalised diagrams provided in [14].
 179 In order to estimate the pump characteristic at a speed value different that the pump rated speed, the affinity laws were
 180 used [15]. According to them, similar operating points will exhibit the same efficiency and the volumetric flow rate, head
 181 and speed are related using the following equations:

$$182 \quad \dot{V}_1 / \dot{V}_2 = N_1 / N_2, \quad h_1 / h_2 = (N_1 / N_2)^2 \quad (22)$$

183 where 1 and 2 denote two similar points at pump speed N_1 and N_2 , respectively.


184 Since the maximum pump efficiency is reduced at speed values different from the rated speed, the correction factor shown
 185 in Figure 4 was applied for calculating the maximum pump efficiency [14].

186

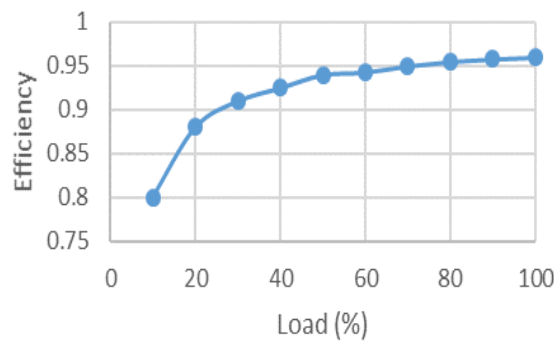

187

188 Figure 3: Variable speed drive efficiency as function of its load percentage

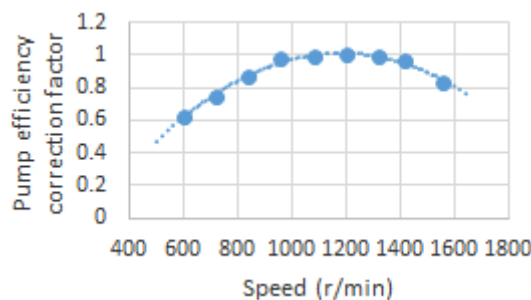

189
 190

Figure 4: Pump efficiency correction factor

191

192 The equations (1)-(22) were simultaneously solved in MATLAB computational environment by using the “fsolve”
 193 function. For all the system coolers, the constraint that the terminals temperature difference has to be kept greater than
 194 5°C as proposed in [16] was taken into account.

195 The developed algorithm inputs include:

- 196 • Volumetric flow rate, head and speed at the pumps design operating points.
- 197 • Heat capacity of the system consumers (heat exchangers/main engine jacket cooling water circuit).
- 198 • Head loss coefficients for heat exchangers.
- 199 • Internal or hydraulic diameter of the pipes.
- 200 • Branches length.
- 201 • Number and type of fittings at each branch.
- 202 • Temperature set points for the system three way valves.
- 203 • Sea water temperature.
- 204 • Properties of the working fluid.
- 205 • Sea water elevation.
- 206 • Motors and variable speed drive efficiencies.
- 207 • Pumps operating speed.

208 The systems outputs include:

- 209 • The volumetric flow rate at each branch.
- 210 • The water temperature at each branch.
- 211 • The operating points (volumetric flow rate, head and efficiency) of each operating pump.
- 212 • The required electric power of each operating pump.

213

214 **4 Case studies**

215 The integrated sea water/fresh water cooling system of a typical handymax bulk carrier of 52,000 mt deadweight was
 216 investigated by using the modelling approach described in the previous section. The ship uses a two-stroke marine
 217 Diesel engine for propulsion that delivers 11,600 kW at its MCR point. In addition, two Diesel generator sets of 500 kW
 218 each are used for supplying the required ship electric energy. The characteristics of the pumps servicing the sea water
 219 and LT/HT fresh water cooling systems at their nominal operating points are presented in Table 1.


220 The integrated cooling system operation was simulated at various M/E operating conditions and considering that two

221 D/G sets operate at 55% load, which can provide the maximum ship electric power demand. It must be noted that the
 222 majority of the ship operation, one D/G set can cover the ship electric power demand, however the assumption of two
 223 operating D/G sets was considered in order to take into account a more demanding scenario for the operation of the ship
 224 cooling system. Various scenarios were considered for the cooling system pumps including the pumps operation at fixed
 225 speed, the pumps speed control and setting two different constraints for the temperature difference at the system heat
 226 exchangers sides.

227 In addition, the annual required energy was estimated for each scenario based on the annual engine operating profile
 228 according to the data presented in [17] for a similar size vessel and shown in Figure 5. The annual energy is calculated
 229 by using the following equation:

$$230 \quad E_a = H_a \sum_{j=1}^n \left(\frac{POT_j}{100} \sum_{i=1}^k P_{el,i} \right) \quad (22)$$

231 where H_a denotes the annual operating hours, POT denotes the percentage of time the main engine operates at the
 232 specific load, j denotes the different engine load points according to the considered profile, and i denotes the operating
 233 pumps of the ship cooling system at each main engine load.

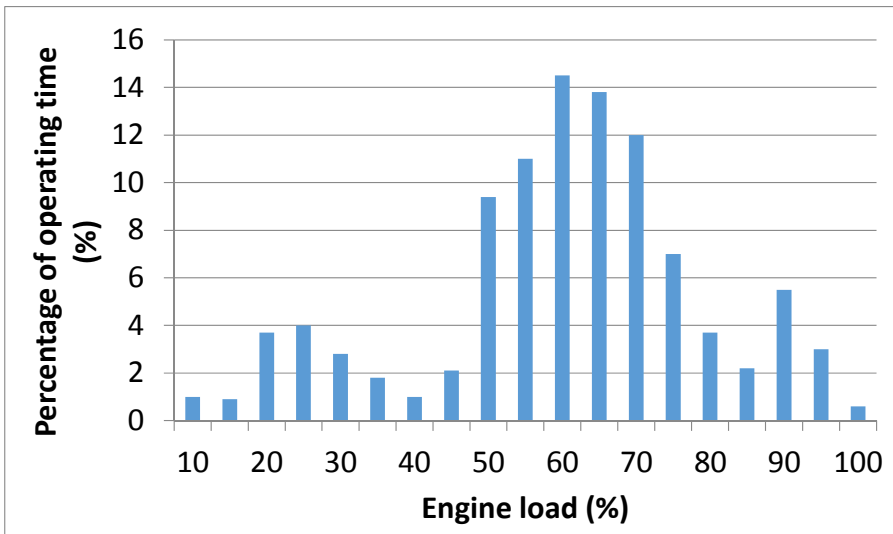

234
 235 Figure 5: Ship main engine operating profile used for calculating the annual energy demand taken from [17]

236 The main engine and D/G sets heat capacities were obtained by the manufactures project guides [18, 19]. The cooling
 237 systems characteristics were estimated based on the ship piping systems drawings and the list of machinery. An amount
 238 of 4% losses for additional equipment losses (heat, cabling, etc.) was included in the calculations. In all the examined
 239 cases herein, the temperature of sea water entering the central cooler was considered to be 25°C, whereas the set points
 240 of the LT and HT three-way valves were taken as 36°C and 80°C, respectively. As the cooling system should be able to
 241 cover the main engine and ship machinery requirements under varying conditions (from arctic to tropic; from low loads

242 to full load), the system is designed to withstand the extreme conditions and thus, the corresponding calculations are
243 usually carried out at the maximum bearable (for the system) temperature of 36°C for the LT fresh water. Therefore, in
244 the present study we used this temperature set point and calculated the system pumps power demand considering
245 various operating cases (pump speed different than the baseline). This results in a demanding operating scenario for the
246 cooling system as usually the sea water temperature and the set point for the LT fresh water temperature are less and
247 therefore, greater openings of the three-way valve (in comparison with the predicted values presented below) are
248 expected.

249 The LT three-way valve temperature set point may only slightly affect the main and auxiliary engines brake specific fuel
250 consumption as it can influence the air coolers operation and up to an extent the engines scavenging air temperature.
251 However, as it is mainly adjusted to match the prevailing environmental conditions, its contribution on the ship engines
252 operation cannot readily identified. It must be noted that such an investigation is outside the scope of the present study.

253 The first investigated scenario considers the pumps operation at their rated speed, i.e. at 1200 r/min. The obtained
254 results for the operation of the M/E at four different loads (namely 25%, 50%, 75% and 100% of its MCR point)
255 considering that two D/G sets operate at 55% load in all cases are presented in Table 2. The calculations were based on
256 the constraint that the temperature difference at the coolers sides should be greater than 5°C as proposed to [16]. By
257 elaborating the results of Table 2, it can be inferred that the central cooler thermal flows (fresh water/sea water) have
258 been in adequate convergence with difference less than $\pm 0.5\%$ (differences lower than $\pm 1.3\%$ were obtained for the
259 results presented in the subsequent Tables 3-5). When the ship main engine operates at 100% load, two sea water pumps
260 and two LT fresh water pump should operate in order to satisfy the system heat demands. However, the obtained flow
261 rates for the each operating SW and LT fresh water pumps were lower than their nominal ones, which means that there
262 is adequate capacity for covering additional heat removal needs from the rest auxiliary machinery. The flow rate of the
263 HT fresh water pump is slightly lower than its nominal value as this system covers only the main engine jacket water
264 needs. The temperature differences at the central cooler sides are 6.9°C and 11°C, respectively. For the operation of M/E
265 at lower loads, one pump of each group (i.e. seawater, LT fresh water, HT fresh water) is required to cover the system
266 needs. All operating pumps run at flow rates slightly lower than their nominal values and therefore, the power demand
267 is expected to be close to the rated power, which can also be inferred by comparing the data contained in Tables 1 and 2.
268 Another point that needs attention is the pressure level of the LT and HT fresh water entering the main and auxiliary
269 engines. According to the main engine manufacturer, a typical range for the HT fresh water manometric pressure is
270 between 3.5 and 4.5 bar with the alarm limit typically being set at 2 bar. The respective typical range for the engine air
271 cooler manometric pressure is 2-4.5 bar with the low alarm lever being set at 1 bar. By taking into account that the LT

272 and HT systems expansion tanks are installed 15 m above the respective pumps suction pipes, the calculated
273 manometric pressure values for the case of 100% load main engine operation were found to be 2.55 bar for the air
274 cooler and LO cooler inlets, respectively, and 3.75 bar for the main engine HT inlet. Similar values were obtained for
275 the other investigated cases, as the pumps operating points were very close to the operating points for the 100% main
276 engine load case. As it was expected, the calculated pressure values lay within the recommended ranges for the pumps
277 operation at their nominal speed of 1200 rpm). In addition, although the engine manufacturer proposes a recommended
278 head value for the sea water pump, there is not any specific requirement for the sea water pressure level.

279 A second case was simulated considering the system pumps operation at 1100 r/min, which can be obtained by using a
280 variable speed drive. The obtained results for the operation of the M/E at four different loads (namely 25%, 50%, 75%
281 and 100% of their MCR points) considering the two D/G sets operate at 55% load are presented in Table 3. For the case
282 where the ship main engine operates at 100% load, the sea water and HT fresh water pumps can cover the system
283 requirements; however the LT fresh water pumps need to operate at their rated speed in order to satisfy the system
284 constraint (5°C temperature difference at heat exchangers sides). Furthermore, even though at full load the LT pumps
285 operate at the rated speed, their power demand is higher compared to baseline case due to the losses of the variable
286 frequency drive. However, there is a reduction in the total required power by 11.6 kWe (113.9 instead of 125.5 kWe), i.e.
287 in percentage of 9.24%. When the ship main engine operates at lower loads, one pump unit from each group is adequate
288 to cover the system needs as the total heat capacity is lower, and as a result less total power (compared to the case where
289 the main engine operates at 100% load) is required.

290 For the 25% load operation of the main engine, the manometric pressure upstream the main engine LO and air coolers
291 was calculated at 2.4 bar, whereas the a value of 3.4 bar was derived for the manometric pressure at the main engine
292 jacket circuit inlet. It can be inferred that there is a leeway for the LT pumps to operate at a lower speed, however the
293 HT pump marginally provides the required pressure level in the HT cooling water system.

294 The total required power as function of the M/E load for the two scenarios presented above is shown in Figure 6. The
295 electric power demand reduction when the pump speed is reduced lies in the region of 9.24% for the 100% main engine
296 load operation and 14.4% for operation of the main engine at lower loads. As it can be also seen in Figure 6, the total
297 power demand depends on the number of the operating pumps and their speed. In both the investigated cases, the power
298 demand is almost constant for the operation of main engine for 25% to 75% load where one pump of each group
299 operates. Therefore, it is concluded that there is potential for reducing the system power demand by using variable
300 speed drives and appropriate control of the cooling system pumps speed.

301 The system operation considering the usage of variable speed drives was simulated and the pumps speed values that

302 result in the minimum power demand were calculated for the cases of setting the constraint for the minimum
 303 temperature difference at 5°C (denoted as ΔT_{min1}) and 10°C (denoted as ΔT_{min2}) at the system heat exchangers sides.
 304 The former represents a realistic operating scenario, whereas the latter represents a more demanding scenario for the
 305 system actual operation. The respective results are presented in Tables 4 and 5 and in Figure 7. For the former case
 306 (Table 4), the system pumps speed values are considerably reduced in comparison with the baseline case, and as a result
 307 the total power demand is significantly lower. For the latter case (Table 5), the power demand is higher but is still lower
 308 than the one of the baseline case for M/E load lower than 75%. For operation of the ship main engine at 100% load, the
 309 sea water pump must provide greater flow rate in order to satisfy the 10°C sides temperature difference constraint and
 310 therefore, greater SW pump speed is needed (1380 r/min instead of 1200 r/min), which results in greater power demand.
 311 With regards to the manometric pressure constrains for the main engine operation at 25% load (the rotational speed fo
 312 LT and HT pumps were found to be 500 and 550 r/min, respectively), the calculated values were 1.7 bar for the LT
 313 cooling system (upstream LO and air coolers) and 2 bar, respectively. Both values are outside the recommended ranges.
 314 In addition, the HT system alarm will be triggered at this operating pressure level. Therefore, it can be deduced that the
 315 operation of the LT and HT cooling pumps at so low rotational speed cannot be allowed, unless a change in these
 316 system design is investigated. A possible solution on this is the proposal of closed pressurised expansion tanks for each
 317 cooling system (industrial expansion tanks with volumes up to 15 m³ are available).
 318 Finally, the estimation of the annual energy demand of the integrated cooling system is presented in Figure 8. The
 319 annual ship operating profile was taken into account as well as the ship annual sailing hours, which were estimated by
 320 considering an average round trip distance of 9.000 nm, a sailing speed of 12 knots and 15% maintenance time. It is
 321 inferred from the results shown in Figure 8 that there is a noteworthy potential for energy saving from the operation of
 322 the cooling system if variable speed drive technologies are used on-board ships.

323
 324

Table 1 Cooling system pumps nominal characteristics

	Speed (r/min)	1200
	Number	2
SW pumps	Rated power (kWe)	37
	Head (m)	25
	Flow rate (m ³ /h)	400
	Speed (r/min)	1200
	Number	2
LT fresh water pumps	Rated power (kWe)	37
	Head (m)	30
	Flow rate (m ³ /h)	350
	Speed (r/min)	1200
	Number	2
HT fresh water pump	Rated power (kWe)	15
	Head (m)	30
	Flow rate (m ³ /h)	97

325
 326

327
328

Table 2 Simulation results for the baseline case (1200 rpm)

Main Engine load (%)	System pumps	Pump speed (rpm)	No of operating pumps	Total electric Power (kW)	LT 3-way valve By-pass flow percentage (%)	HT 3-way valve By-pass flow percentage (%)	total flow rate (m ³ /h)	Central cooler inlet Temp. FW side (°C)	Central cooler outlet Temp. FW side (°C)	Central cooler outlet Temp. SW side (°C)	HTFW cooler inlet Temp. LT FW side (°C)	HTFW cooler outlet Temp. LT FW side (°C)	HTFW cooler outlet Temp. HT FW side (°C)
25	SW	1200	1	30.36	40%	60%	272.8	43.2	31.2	30.8	42.0	50.1	65.6
	LT	1200	1	35.76			210.0						
	HT	1200	1	10.49			79.0						
50	SW	1200	1	30.33	25%	50%	272.8	51.2	31.0	37.5	46.0	62.3	62.0
	LT	1200	1	36.00			213.7						
	HT	1200	1	11.05			85.8						
75	SW	1200	1	30.33	20%	35%	272.8	57.7	30.6	42.8	47.8	68.0	62.3
	LT	1200	1	36.15			214.1						
	HT	1200	1	11.27			88.55						
100	SW	1200	2	52.59	0%	0%	338.7	55.9	36.0	49.0	44.0	59.6	64.4
	LT	1200	2	61.41			390.0						
	HT	1200	1	11.51			92.7						

329
330
331
332

Table 3 Simulation results for the case where the pumps operate at 1100rpm

Main Engine load (%)	System pumps	Pump speed (rpm)	No of operating pumps	Total electric Power (kW)	LT 3-way valve By-pass flow percentage (%)	HT 3-way valve By-pass flow percentage (%)	total flow rate (m ³ /h)	Central cooler inlet Temp. FW side (°C)	Central cooler outlet Temp. FW side (°C)	Central cooler outlet Temp. SW side (°C)	HTFW cooler inlet Temp. LT FW side (°C)	HTFW cooler outlet Temp. LT FW side (°C)	HTFW cooler outlet Temp. HT FW side (°C)
25	SW	1100	1	25.80	30%	57%	250.0	43.8	32.6	31.4	42.8	52.6	65.4
	LT	1100	1	30.40			195.5						
	HT	1100	1	9.35			73.6						
50	SW	1100	1	25.81	20%	40%	250.0	52.6	31.9	38.7	47.2	65.0	63.5
	LT	1100	1	30.90			196.3						
	HT	1100	1	9.69			80.7						
75	SW	1100	1	25.80	16%	32%	250.0	59.6	31.1	44.5	48.9	71.0	61.5
	LT	1100	1	31.10			196.8						
	HT	1100	1	10.21			81.4						
100	SW	1100	2	44.89	0%	0%	310.0	56.0	36.0	51.0	44.0	59.7	63.0
	LT	1200	2	61.41			390.0						
	HT	1100	1	7.61			85.0						

333

334
335

Table 4 Simulation results for the case of using variable speed drives for obtaining minimum system power under the constraint of 5°C allowed minimum temperature difference at heat exchanger sides(ΔTmin1)

Main Engine load (%)	System pumps	Pump speed (rpm)	No of operating pumps	Total electric Power (kW)	LT 3-way valve By-pass flow percentage (%)	HT 3-way valve By-pass flow percentage (%)	total flow rate (m ³ /h)	Central cooler inlet Temp. FW side (°C)	Central cooler outlet Temp. FW side (°C)	Central cooler outlet Temp. SW side (°C)	HTFW cooler inlet Temp. LT FW side (°C)	HTFW cooler outlet Temp. LT FW side (°C)	HTFW cooler outlet Temp. HT FW side (°C)
25	SW	350	1	6.60	0%	50%	78.3	53.0	36.0	45.3	51.2	73.0	56.3
	LT	500	1	9.14			89.6						
	HT	550	1	2.66			38.4						
50	SW	600	1	8.26	0%	16%	135.3	58.6	36.0	50.2	51.3	75.7	56.1
	LT	800	1	16.20			144.0						
	HT	550	1	2.85			41.0						
75	SW	800	1	12.31	0%	0%	181.0	61.7	36.0	51.9	50.0	74.2	55.7
	LT	1000	1	24.51			180.2						
	HT	550	1	2.92			42.1						
100	SW	1100	2	45.96	0%	0%	310.0	55.9	36.0	51.0	44.0	59.7	48.9
	LT	1200	2	61.40			390.0						
	HT	600	1	3.15			46.5						

336
337
338
339

Table 5 Simulation results for the case of using variable speed drives for obtaining minimum system power under the constraint of 10°C allowed minimum temperature difference at heat exchanger sides (ΔTmin2)

Main Engine load (%)	System pumps	Pump speed (rpm)	No of operating pumps	Total electric Power (kW)	LT 3-way valve By-pass flow percentage (%)	HT 3-way valve By-pass flow percentage (%)	total flow rate (m ³ /h)	Central cooler inlet Temp. FW side (°C)	Central cooler outlet Temp. FW side (°C)	Central cooler outlet Temp. SW side (°C)	HTFW cooler inlet Temp. LT FW side (°C)	HTFW cooler outlet Temp. LT FW side (°C)	HTFW cooler outlet Temp. HT FW side (°C)
25	SW	600	1	8.26	0%	42%	135.3	46.6	36.0	36.6	45.4	59.0	60.2
	LT	800	1	16.20			144.0						
	HT	550	1	2.74			39.7						
50	SW	800	1	12.28	0%	10%	181.0	54.0	36.0	44.0	48.2	67.7	58.2
	LT	1000	1	23.95			180.0						
	HT	550	1	2.74			41.5						
75	SW	1000	1	19.95	0%	0%	226.8	57.4	36.0	46.0	47.7	67.7	57.7
	LT	1200	1	36.08			216.5						
	HT	600	1	2.74			46.0						
100	SW	1380	2	90.40	0%	0%	390.0	55.9	36.0	45.8	44.0	59.8	53.6
	LT	1200	2	61.40			390.0						
	HT	700	1	5.00			54.7						

340
341

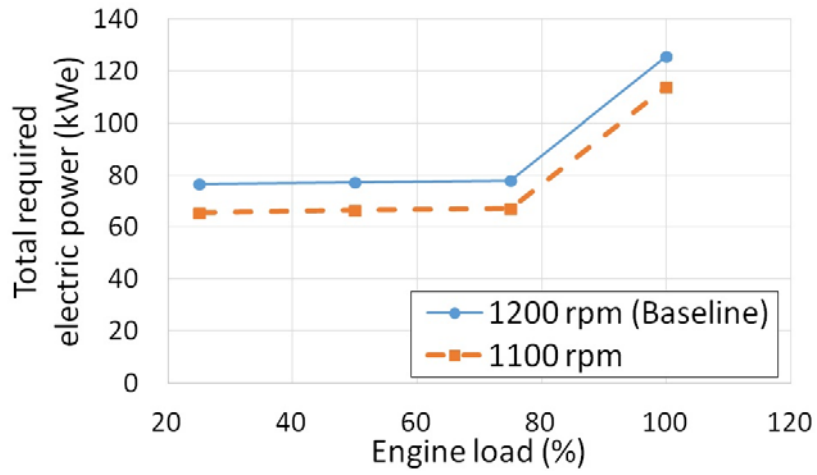


Figure 6: Cooling system total electric power demand

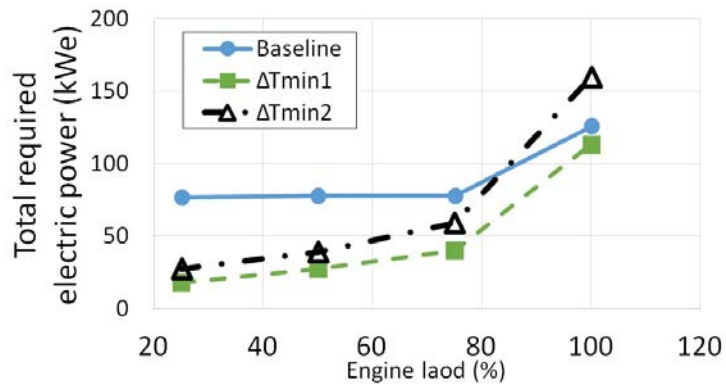


Figure 7: Cooling system total minimum electric power demand for two different constraints of coolers sides minimum allowed temperature difference. ΔT_{min1} : 5°C min; ΔT_{min2} : 10°C.

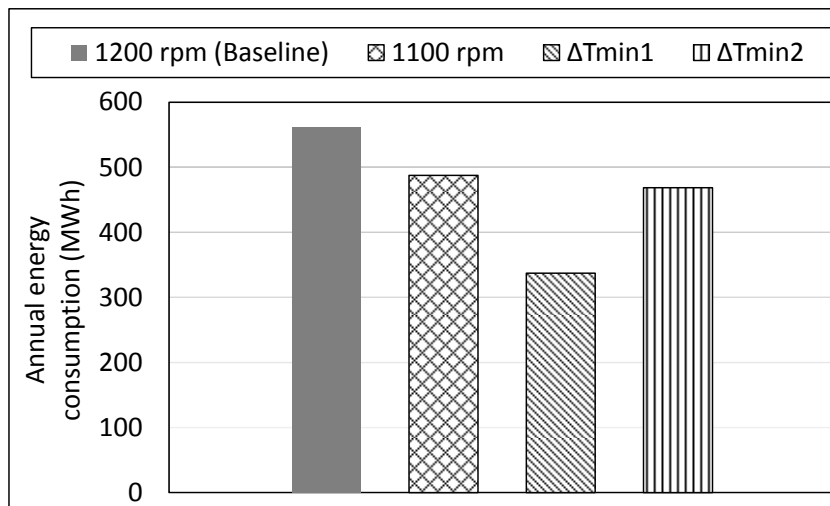


Figure 8: Annual energy consumption

342
343
344
345

346
347
348
349
350
351

352
353
354

355

356 **Conclusions**

357 The operation of the integrated sea water/ fresh water cooling system of a handymax bulk carrier was investigated
358 through simulation. Various cases of operating the system pumps including constant and variable speed were examined.

359 The main conclusions derived from this work are summarised as follows.

- 360 – When the pumps operate at their rated speed the power demand is close to the rated pumps power independently of
361 the cooling system rejected heat capacity that vary with the M/E and D/G sets loading.
- 362 – By reducing the pump speed the required pump power can lower, thus enabling the fuel saving.
- 363 – Variable frequency drives and control of the cooling system pumps speed can result in substantial reduction of the
364 required power considering that the ship engines and machinery rarely operate at their maximum load.
- 365 – There is high potential for reduction of the required power demand with the use of variable speed drives installed
366 in the ship cooling pumps, since the system is designed to cover the worse operating conditions i.e. tropical
367 conditions and maximum load of ship engines and machinery, which does not represent the actual system
368 operation.
- 369 – For the LT and HT fresh water cooling pumps, their minimum rotational speeds are constrained by the engine
370 manufacturer required pressure levels. For fully exploiting the energy saving capabilities in these systems,
371 alternative designs including closed expansion tanks need to be further investigated.

372 The presented simulation tool and the estimation of the annual energy consumption could be used as tool for evaluating
373 the energy saving potential for the ship auxiliary systems and the techno-economic study of the installation of variable
374 frequency drives for the ship main pumps and fans.

375

376 **Acknowledgements**

377 The authors gratefully acknowledge the financial support of the European Commission through the research project
378 JOULES (www.joules-project.eu), which is jointly funded by the 7th Framework Programme and the industry, for the
379 work reported in this paper.

380

381

382 **References**

- 383 1. IMO. (2011). *Resolution MEPC.203(62), Amendments to the annex of the protocol of 1997 to amend the international convention*
384 *for the prevention of pollution from ships, 1973, as modified by the protocol of 1978 relating thereto (Inclusion of regulations on*
385 *energy efficiency for ships in MARPOL Annex VI)*, MEPC 62/24/Add.1, London: International Maritime Organization.
- 386 2. ABB. (2013). *SW Cooling Pumps Variable Speed Drives Upgrade*. ABB Technical Report.
- 387 3. Su C.L., Chung W.L., Yu K.T. (2013b). *An energy-savings evaluation method for variable-frequency-drive applications on ship*
388 *central cooling systems*. IEEE Transactions on Industry Applications, . 50(2), 1286-1294.
- 389 4. ABB. (2012). *Using Variable Frequency Drives (VFD) to save energy and reduce emissions in new builds and existing ships*.
390 ABB Technical Report.
- 391 5. Mrakovic T., Medica V., Skific N. (2004). *Numerical modelling of an engine cooling system*, Journal of Mechanical Engineering,
392 50(2), 104-114.
- 393 6. Hansen M., Stoustrup J., Bendtsen J. (2013). *Modeling and control of a single-phase marine cooling system*. Control Engineering
394 Practice, 21, 1726-1734.
- 395 7. DNV GL SE, (2015). Rules for Classification and Construction, I-1.2, July 2015, Hamburg, Germany.
- 396 8. Haaland S.E. (1983). *Simple and Explicit Formulas for the Friction Factor in Turbulent Flow*. Journal of Fluids Engineering,
397 103 (5), 89–90.
- 398 9. Brkic D. (2011). *Review of explicit approximations to the Colebrook relation for flow friction*, Journal of Petroleum Science and
399 Engineering, 77, 34-48.
- 400 10. Peters M.S., Timmerhais K., West R.E. (2003). *Plant Design and Economics for Chemical Engineers*, 5th ed. McGraw Hill.
- 401 11. Shah R.K., Sekulic D.P., (2003). *Fundamentals of heat exchanger design*, John Wiley & Sons.
- 402 12. Karassik I., Messina J., Cooper P., Heald C. (2001). *Pump Handbook*. Third Edition, McGraw-Hill, USA.
- 403 13. US Department of Energy. (1991). *Fact Sheet: Determining Electric Motor Load and Efficiency*. Motor Challenge Program,
404 Technical Report.
- 405 14. Athanasiadis N. (1989). *Hydrodynamic Machinery*. NTUA, Athens.
- 406 15. Lobanoff V.S., Ross R.R. (1985). *Centrifugal Pumps Design and Application*. Gulf Publishing, Houston TX.
- 407 16. SNAME. (1990), *Marine Diesel Power Plant Practises. T&R Bulletin, No. 3-39.*
- 408 17. Baldi F., Bengtsson S., Andersson A. (2013). *The influence of propulsion system design on the carbon footprint of different marine*
409 *fuels*. Low Carbon Shipping Conference, London.
- 410 18. MAN Diesel & Turbo. (2010). *7S50MC-C8.2-TII with 1x MAN TCA66-21. Project Guide-Marine*, Augsburg, Germany.
- 411 19. MAN Diesel & Turbo. (2015). *L16/24 Project Guide – Marine Four-stroke GenSet compliant with Tier II*, Augsburg, Germany.

412

413 **Nomenclature**414 **Symbols**

415	a,b,c	constants (-)
416	A	pipe cross-section area (m ²)
417	c _p	specific heat at constant pressure (J/kg K)
418	D	pipe hydraulic diameter (m)
419	e/D	relative roughness (-)
420	E	energy (kWh)
421	f	friction factor (-)
422	g	gravitational acceleration (m/s ²)
423	h	head (m)
424	H	operating hours (h)
425	K	loss coefficient (-)
426	L	pipe length (m)
427	N	rotational speed (r/min)
428	P	power (W)
429	POT	percentage of time (%)
430	\dot{Q}	transferred heat rate (W)
431	Re	Reynolds number (-)
432	T	temperature (K)
433	\dot{V}	volumetric flow rate (m ³ /s)
434	z	elevation (m)

435

436 **Greek symbols**

437	Δ	difference
438	η	efficiency (-)
439	ρ	fluid density (kg/m ³)

440

441 **Subscripts**

442	C	cold side
443	CC	central cooler
444	d	drive
445	hot	hot side
446	HE	heat exchanger
447	HTFW	high temperature fresh water
448	in	inlet
449	JW	jacket water

450 LT low temperature
451 m motor
452 ME main engine
453 o outlet
454 p pump (-)

455

456 **Abbreviations**

457 D/E Diesel Engine
458 D/G Diesel Generator
459 FW Fresh Water
460 HT High Temperature
461 JW Jacket Water
462 LT Low Temperature
463 MCR maximum continuous rating
464 M/E Main Engine
465 SW Sea Water
466 VFD Variable Frequency Drive