

## **Pre-Processing Inspection – a worthwhile activity for remanufacturers**

Sara J. Ridley, W. L. Ijomah

Design, Manufacture and Engineering Management, University of Strathclyde,  
Glasgow,

G1 1XJ, Scotland, UK

sara.ridley@gb.mahle.com

### **Abstract**

Remanufacture, a process to return used product to an “as-new” condition with an equivalent quality, is typically carried out on complex mechanical assemblies as the remaining value in the used product is high. Remanufacturing is often a more efficient reuse strategy than recycling as, in addition to the reduction in landfill and the use of virgin material, it also reduces the amount of energy used in successive applications by removing raw material production and any subsequent manufacturing processes, thus increasing profitability for the remanufacturer.

There remain barriers to remanufacturing particularly around the paucity of research into the field. Guide identified that remanufacturers perceive the scarcity of effective remanufacturing tools and techniques as a key threat to the industry. Ijomah quantified these key characteristics on a five-point scale ranging from “Not Significant through to “Critical”. The only characteristic rated “critical” by remanufacturers was component inspection. Personal experience and observation of the remanufacturing process has shown that this remanufacturing sub-activity, although it can have significant bearing on overall productivity, is undertaken in a hap-hazard manner based almost purely on experience and guesswork and lacks proper methodologies and tools.

This paper presents the results of quantitative doctoral research, conducted in a Caterpillar Remanufacturing UK facility, to establish the relationship between pre-processing inspection and the subsequent remanufacturing process time for returned used products known as cores. It concludes that for components (i.e. cores) having either complex geometry (such as internal ports), a large number of sub-components or that are constructed from, or comprising of, multiple materials, the remanufacturing process is shortened by increased inspection prior to processing. However, these benefits are currently limited by the amount of information that can be gained from the inspection methods used. It describes the practical use of these factors in a decision-making methodology for inspection.

### **1. Introduction**

Remanufacture, a process to return used product to an “as-new” condition from the customers perspective with a warranty that is at least equal to a newly manufactured equivalent (Ijomah, 2002), is typically carried out on complex mechanical assemblies as the remaining value in the used product justifies the costs incurred.

Remanufacturing activities are categorised as ‘reduction’ and ‘reuse’, the top two preferred waste management options identified in the EU’s Fifth Environmental Action Programme. Nevertheless recycling is often seen as the obvious end-of-life choice. UK government figures (DEFRA, 2009) estimate that of the waste going to landfill, between 2% and 9% is diverted to remanufacturing and other reuse methods whereas 44% is recycled.

Remanufacturing is a more efficient reuse strategy as it also reduces the amount of energy used in production by removing the need for raw material production and the

subsequent shaping and machining processes thus slowing or reducing the production of greenhouse gas emissions such as CO<sub>2</sub>. Sutherland *et al.* (2008) found that at the component level, the energy savings could reach 90%. Lund (1984) suggested that up to 85% by weight of a remanufactured product may come from reclaimed components. Manufacturing savings of between 20% and 80% can be accrued from remanufacturing.

Remanufacturing also benefits wider society as it creates employment, particularly for unskilled and semi-skilled workers (Tang *et al.*, 2007) whilst providing lower cost, typically between 30% and 40% lower, equivalent quality products particularly benefitting those on restricted incomes. Indeed, the manual nature of much remanufacturing can provide employment for lower skilled workers and is economically significant, contributing approximately £2.35 billion to the UK economy each year (Chapman *et al.*, 2010). In “Remanufacturing: Towards a Resource Efficient Economy” (2014) an all-party parliamentary group recommended the creation of a centre of excellence for remanufacturing.

Ilgın and Gupta, (2010), note that despite an increase in research during the first decade of this century, there is still a lack of remanufacturing specific tools and techniques. Parkinson and Thompson (2003) argue that this same lack of focus leads to the significance of remanufacturing in terms of sustainable development being underestimated. Nevertheless remanufacturers exist to be commercially viable and so seek to reduce costs and increase profit by both decreasing work content and reducing the included quantity of new material.

Guide (2000) identified that remanufacturers perceive the scarcity of effective remanufacturing tools and techniques as a key threat to the industry. Ijomah (2002) quantified these key characteristics and found that remanufacturers rated component inspection as critical. Personal industrial experience and observation of the remanufacturing process has shown that the pre-processing inspection activity, although beneficial, is often based on local experience and guesswork. Efficiency and effectiveness are key requirements for enhancing profitability and productivity in a business environment (Womak *et al.*, 2007). This paper presents the findings of quantitative research into the effects of pre-processing inspection of cores on remanufacturing efficiency.

## **2. Theoretical Background and Industrial Setting of the Research**

Industry recognisable as remanufacturing has been in evidence since early in the 20<sup>th</sup> century. It expanded during and after the Second World War largely fuelled by the need to reuse military vehicles and machinery. OEMs (Original Equipment Manufacturer) and/or their agents and dealers remanufactured their own products generally on a fairly small scale. Typical parts that were remanufactured include compressors and gearboxes.

Lund (1984) defined three basic types of remanufacturer:

- OEM remanufacturers – often a process alongside their manufacturing operations;
- Third-party remanufacturers – remanufacturing under licence for the OEM and often, but not always with their technical support; and

- Independent remanufacturers – remanufacturing other people’s goods without licence or support for direct sales into the aftermarket.

The key difference, in the context of this research, between independent remanufacturers on the one hand and OEM and contract remanufacturers on the other, is in terms of cores. Cores are the used products at the end of their working life. In almost all cases for the contract and OEM remanufacturer the customers are responsible for return of core units with the remanufacturer having little control over the quantity, mix or quality of returns. Generally the OEM remanufacturer is separate from general production, so the OEM can be considered the customer to the remanufacturer. This can have a significant impact on ability to supply customers as the cores received cannot be guaranteed to match the mix of remanufactured units required by the customer. In addition, contract remanufacturers operate with fixed cost contracts that allow for little or no additional charge to be made for badly damaged or incorrect core.

The actual remanufacturing process varies by product and methods such as material deposition that may be appropriate for more expensive components, such as cylinder blocks, would not necessarily be suitable for remanufacturing mobile phones. Nevertheless the overall process regardless of product can be described as in the figure below (Hatcher *et al.*, 2013):

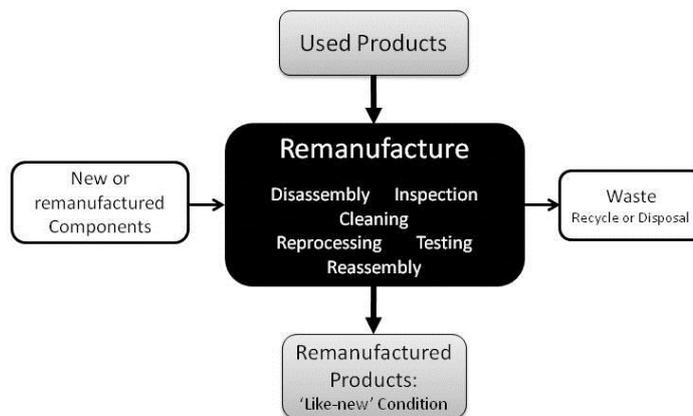


Figure 1 An Illustration of a Typical Remanufacturing Process

Many authors (Fleischmann *et al.*, 1997, Guide 2000, Guide and Jayaraman 2000, Toktay *et al.*, 2000, Inderfurth 2005, Ketzenberg *et al.*, 2006, Savaskan *et al.*, 2004, Errington 2009, Teunter and Flapper, 2010 etc.) acknowledge that uncertainty about the quality (and often the quantity) of cores has a detrimental effect on the productivity and profitability of remanufacturers. Errington (2009) describes the use of core inspection to eliminate those that would be either prohibitively expensive or

extremely difficult to remanufacture. This is particularly useful to independent remanufacturers, especially where they do not have an identified customer for their product, but contract remanufacturers often have very little choice when specific customer demand exists regardless of the supplied quantity or quality of cores.

Inspection is a fundamental part of any remanufacturing process (Ijomah, 2002, Georgiadis and Vlachos, 2004, Östlin *et al.*, 2008, Mukhopadhyay and Ma, 2008 etc.). It is usual practice in remanufacturing to inspect at many stages through the process, often functionally and in all cases visually. Brent and Steinhilper (2004) state that 100% inspection is always required at one or more of the remanufacturing phases. The result of this is a high quality product for customers but lowered profitability for the remanufacturer. This is due to the uncertainty concerning the quality and condition of the returned products.

Literature suggests that there is a strategic benefit in core sorting. Mähl and Östlin (2007) and Errington (2009) recommend grading cores for quality to improve the disassembly process. Teunter and Flapper (2010) go further and propose four grades of cores as part of their acquisition policy. They all note a benefit (unquantified) to remanufacturers when they are able to process high quality cores.

This research, to determine whether and by how much the overall remanufacturing process of engines could be made more efficient with a robust inspection of cores, was carried out at the Caterpillar Remanufacturing Services (a division of Caterpillar Inc.) facility in Rushden, U.K. This facility primarily remanufactured petrol and diesel engines both as an OEM for Caterpillar Inc. and as a contract remanufacturer for a variety of other OEMs. Remanufacturing is a mature business in the automotive sector and consequently offers an ideal environment for experimental research. The researcher's employment at the facility as a production manager also facilitated unprecedented access over an extended period to all aspects of the remanufacturing process.

### **3. Methodology**

The researcher's position within the remanufacturer made it possible to adopt a true experimental design (Campbell and Stanley, 1966, Polit and Hungler, 1999 etc.) with a control group to protect internal validity. Other threats to validity were negated by the randomisation of subjects into treatment groups (Antony, 2003).

#### **3.1 Independent Variables**

The aim of the research was to understand whether the overall remanufacturing process was made more efficient by a regime of pre-processing inspection. It was consequently important to understand which elements of the inspection resulted in the greatest benefits. Therefore the content of the pre-processing inspection, the independent variable in the experiment, was manipulated by the researcher.

Four inspection protocols were developed, limited by the technology available in the remanufacturing facility. These were:

Protocol 1      No inspection, decant, establish part number and reuse. This protocol was to test whether inspection of core made any material difference.

- Protocol 2      Decant, establish part number, brief visual, external inspection and determining one of three gradings. Either, 1) Use as regular cores, 2) close to new – bypass the usual process or 3) severely damaged – use as a parts donor. This was the usual process and acted as the baseline.
- Protocol 3      Protocol 2 plus manual rotation of moving parts, visual and scent inspection of rotating electrics and close inspection of open ports and oilways. This latter inspection is commonly known by practitioners as the “scratch and sniff” test because burnt electric components can often be detected from their smell.
- Protocol 4      Protocol 3 plus inspection using a fibre optic endoscope to investigate the internal condition of cylinder bores, turbochargers, alternators etc.

Instructions detailing the exact work content for each individual protocol were produced and operators were given training in the specifics of each one.

The output from each inspection protocol was a feedback sheet for every engine in the experiment. This sheet noted the unique core number, the specific OEM part number and the outcome of the inspection dependent upon the protocol used.

### **3.2 Dependent Variables**

The overriding factor in the choice of dependent variables was the ability to measure the direct effects of the experimental treatments. Processing time for each remanufacturing activity, from unpacking and inspection to final post-production testing, was able to be measured both at individual component/sub-assembly level and at overall engine level and consequently became the dependent variable.

An engine is an assembly of individual components and smaller assemblies and, as a consequence, provided opportunities to establish whether the experimental treatments were equally effective on a variety of differing materials, complexities and scales. Measurement of the overall processing time would establish whether the benefits of the inspection protocols outweighed the scale of the intervention.

Four engines were selected, representing a variety of customers and a relatively large volume of product. The selections were designed to promote the ability to generalize the findings.

Engine A - 4 cylinder engine with a capacity of less than 2 litres. This engine was supplied to the customer at a long engine level. This comprised: cylinder block assembled with pistons, connecting-rods, crankshaft, fully assembled and timed cylinder head, oil sump, oil pump, timing gear and outer covers.

Engine B - 6 cylinder engine of a capacity greater than 2 litres. This engine was also supplied to the customer at a long engine level comprising: cylinder block assembled with pistons, connecting-rods, crankshaft, fully assembled and timed cylinder head, oil sump, oil pump, timing gear, outer covers and vacuum pump.

Engine C - 4 cylinder engine with a capacity greater than 2 litres. This engine was supplied to the customer at a fully dressed level. This comprised: cylinder block assembled with pistons, connecting-rods, crankshaft, fully assembled and timed

cylinder head, oil sump, oil pump, timing gear, outer covers, vacuum pump, fuel lift pump, exhaust gas recirculation (EGR) valve, starter motor, alternator, flywheel, turbocharger and fuel injection equipment.

Engine D - 6 cylinder engine with a capacity greater than 2 litres. This engine was supplied to the customer at a fully dressed level. This comprised: cylinder block assembled with pistons, connecting-rods, crankshaft, fully assembled and timed cylinder head, oil sump, oil pump, timing gear, outer covers, vacuum pump, fuel lift pump, compressor, turbocharger and fuel injection equipment.

Each activity that forms the overall remanufacturing process, disassembly, cleaning, any appropriate salvage activities, reassembly and testing was timed for each component or sub-assembly of each engine in order that any changes could be identified. In total 2196 engines were investigated.

### **3.3 Design of Experiments**

The experiments were constructed from a post-test only control group, designed using the “Solomon Four group design” method (Solomon, 1949) as a template to ensure all variables were covered.

Engines of each type were randomly assigned upon receipt, sight-unseen, to one of four groups comprising of that engine type only. Four common pre-processing inspection protocols were then applied, one to each group, and the processing times for each activity measured. Both the protocols and their application were randomised and so at any one time engines of all four types subjected to any one of all four protocols were passing through the facility.

The research design assumes that inspection protocol 2, which is the existing level of pre-inspection prior to the experiments being conducted, is the equivalent of no treatment and that all groups subjected to this protocol form the control group. Essentially this is just a transfer of the control from the experimental groups and to the treatment. In all cases, R represents randomisation of the group, X represents a treatment, a pre-processing protocol, ( $X_1$ ,  $X_2$  etc.) and O represents a group, an engine in this research ( $O_1$ ,  $O_2$  etc.). The overall design is represented in Figure 2 below.

R	O1 <sub>A</sub>	X <sub>1</sub>	O1 <sub>A</sub> ..... O1 <sub>An</sub>
R	O2 <sub>A</sub>	(X <sub>2</sub> )	O2 <sub>A</sub> ..... O2 <sub>An</sub>
R	O3 <sub>A</sub>	X <sub>3</sub>	O3 <sub>A</sub> ..... O3 <sub>An</sub>
R	O4 <sub>A</sub>	X <sub>4</sub>	O4 <sub>A</sub> ..... O4 <sub>An</sub>
R	O1 <sub>B</sub>	X <sub>1</sub>	O1 <sub>B</sub> ..... O1 <sub>Bn</sub>
R	O2 <sub>B</sub>	(X <sub>2</sub> )	O2 <sub>B</sub> ..... O2 <sub>Bn</sub>
R	O3 <sub>B</sub>	X <sub>3</sub>	O3 <sub>B</sub> ..... O3 <sub>Bn</sub>
R	O4 <sub>B</sub>	X <sub>4</sub>	O4 <sub>B</sub> ..... O4 <sub>Bn</sub>
R	O1 <sub>C</sub>	X <sub>1</sub>	O1 <sub>C</sub> ..... O1 <sub>Cn</sub>
R	O2 <sub>C</sub>	(X <sub>2</sub> )	O2 <sub>C</sub> ..... O2 <sub>Cn</sub>
R	O3 <sub>C</sub>	X <sub>3</sub>	O3 <sub>C</sub> ..... O3 <sub>Cn</sub>
R	O4 <sub>C</sub>	X <sub>4</sub>	O4 <sub>C</sub> ..... O4 <sub>Cn</sub>
R	O1 <sub>D</sub>	X <sub>1</sub>	O1 <sub>D</sub> ..... O1 <sub>Dn</sub>
R	O2 <sub>D</sub>	(X <sub>2</sub> )	O2 <sub>D</sub> ..... O2 <sub>Dn</sub>
R	O3 <sub>D</sub>	X <sub>3</sub>	O3 <sub>D</sub> ..... O3 <sub>Dn</sub>
R	O4 <sub>D</sub>	X <sub>4</sub>	O4 <sub>D</sub> ..... O4 <sub>Dn</sub>

Figure 2 Experimental Research Design

This design satisfies all the concerns of validity: having a control group, involving the manipulation of one independent variable and measuring all of the dependent variables. It also satisfies the recommendations of Charness *et al* (2011) by combining between-subject and within-subject design.

### 3.4 Randomisation of Subjects

Randomisation of the experimental subjects was an essential part of the experiment in order that both the internal and external validity be maintained. Cores typically arrived at the Rushden remanufacturing facility from collection sites after consolidation. No information was available concerning the condition, quality or use history for any cores. Cores were often shipped under generic part numbers that encompassed a range of similar engines rather than by individual part number, a consequence of the earlier consolidation process. This meant that the cores were a random mix both of specific part number and of condition. Each core was randomly assigned a unique tracking number and all components removed were identified with that number.

The decision to assign a protocol at receipt but not to inspect until a core was required for production was driven by two factors: the need to disrupt normal working practices as little as possible, and the need to minimise the cost impact of the experiment. Disruption of normal working practices more than was necessary to administer the treatments was undesirable because it might introduce unforeseen variables that could contaminate the results.

The allocation of a unique tracking number ensured that once the engine was passed to disassembly none of the up-stream operatives were able to determine which

inspection protocol had been applied to which engines or components. This further anonymity aided internal validity as operatives could not alter their behaviour based on any assumptions about the components being processed. All activities were kept within normal production boundaries in order that individual operators could exert no influence on the outcome of the experiments.

### **3.5 Data Collection and Integrity**

The nature of the experiment and the quantity of cores involved meant that a considerable amount of data would be collected. It would be impossible for one person to collect all of the results, particularly as many of the operations were undertaken simultaneously. The primary concern therefore became the ability to ensure data integrity if the collection of processing times was dispersed amongst operators. Processing times were captured in decimal minutes and collated in spreadsheet form for analysis.

The data collection required for this experiment was part of the data normally collected by operators and consequently the only additional requirement was that the unique tracking number was recorded alongside the processing time. A slight change to the recording sheet made this a simple adjustment for operators. All the operators involved noted the times against the unique tracking numbers.

Operators were instructed to record the time displayed on the stopwatch at the end of the process exactly as displayed and not to round up or down.

Processing times included all operations that a component was subjected to during that activity where the operator was involved. Therefore cycle times in machines such as wash machines where there was no operator involvement were not recorded as part of the processing time but if the operator was required to be present the entire time, for instance during the post-production test, this period was included in the processing time.

### **3.6 The Experimental Audit Process**

An audit process to check data recorded by operators was already in place at the Rushden facility and a more frequent version of this system was used to verify the data collection. Using this system ensured that operatives experienced working conditions that were as near as possible to usual. This was important to ensure that operators did not alter their behaviour because of the experiments and in some way influence the data collected.

Sample size was calculated on the basis of the predicted data population of around 30,000 entries. The large amount of data being collected (the entire population rather than a sample) meant that there was high confidence that any statistical significance would be directly attributable to treatments and consequently setting the  $\alpha$  value at 0.05 and thus the confidence at 95% could be justified (Lipsey and Hurley, 2009). The calculation of sample size based on those parameters required a 7.14% sample size or 2427.6 parts. This equated to one component in every fifteen.

The existing audit scheme was modified to satisfy the requirements of the research design whilst remaining intrinsically the same in order to reassure the operators.

All audits during the experimental phase were carried out by the researcher.

#### **4. Results, Analysis and Discussion**

Results were collected and analysed for all four of the subject engines but only those for engine C are presented here owing to the quantity of data. Full data and analysis can be found in Ridley (2013). The results from the across-engine analysis of all four engines showed consistent patterns across engines and engine components; consequently engine C was selected as it has the greatest number of constituent components and sub-assemblies can be said to be the most representative of the research as a whole.

##### **4.1 Engine C Results**

A total of 420 type C engines were examined during the experimental phase. These were randomly allocated on arrival to the four inspection protocols in the following quantities:

- Protocol 1 – 104 engines;
- Protocol 2 – 105 engines;
- Protocol 3 – 105 engines; and
- Protocol 4 – 106 engines

Engine C was a 4 cylinder engine with a capacity of more than 2 litres.

Table 1 shows the percentage change in mean time from the control (protocol 2) for each remanufacturing activity and each protocol.

Activity	% change in Mean from control			
	Protocol 1	Protocol 2	Protocol 3	Protocol 4
Decant and Inspect	-21.61	Control	23.66	85.85
Disassembly	10.35	Control	-20.06	-20.06
Block Remanufacture	3.12	Control	0.63	-0.83
Head Remanufacture	-0.39	Control	-3.88	-3.10
Crankshaft Remanufacture	0.03	Control	-1.23	-1.20
Camshaft Remanufacture	-0.17	Control	0.04	-0.06
Valve Remanufacture	0.38	Control	0.13	0.17
Connecting Rods	-0.01	Control	-0.02	0.20
Rocker Shaft Remanufacture	-0.08	Control	-0.05	-0.10
Oil Pump Remanufacture	-0.01	Control	0.06	-0.04
Fuel Lift Pump Remanufacture	3.96	Control	-1.33	-0.53
EGR Valve Remanufacture	1.14	Control	-3.78	-3.83
Vacuum Pump Remanufacture	0.20	Control	-0.08	-0.88
Starter Motor Remanufacture	7.26	Control	-17.58	-19.54
Alternator Remanufacture	7.83	Control	-6.68	-9.42
Flywheel Remanufacture	1.06	Control	-1.46	-3.10
Turbocharger Remanufacture	4.15	Control	-16.70	-18.61
Small Parts Remanufacture	5.85	Control	-13.52	-13.31
Engine Kitting	9.31	Control	-4.07	-3.64
Engine Assembly	-0.21	Control	-0.30	-0.32
Post-Production Test	0.19	Control	0.04	0.02
Paint, Pack and Despatch	-0.02	Control	-0.04	-0.03
Overall Remanufacture	2.74	Control	-5.36	-5.27

Table 1 Percentage change in Mean Activity Times from the Control – Engine C

It can be seen that whilst engines inspected to protocols 1 and 2 have a much lower time for the decant and inspect activity (the application of the protocol), the overall remanufacturing process time is higher than for those engines inspected to protocols 3 and 4, despite their longer decant and inspect activity times. In these latter two cases, the benefits greatly outweigh the additional work. The table also shows that not all activities within the remanufacturing process benefit in the same way from the increasing levels of inspection.

#### **4.2 Analysis of Engine C Results**

The primary analysis across all the results was within-engine as this clearly demonstrated whether the treatment applied had any effect as each component set was similar. A secondary cross-engine analysis was conducted to establish similarities between engine sub-assemblies and components to better identify any commonalities that would enable a generic inspection methodology to be established. Analysis of the overall data set for each engine used IBMs Statistical Processing for Social Scientists (SPSS) package and specifically using one-way ANOVA (Iversen and Norpoth, 1987). One-way ANOVA was selected because there are four randomly selected groups (the four engine types) who together constitute the entire population.

The within-engine analysis for engine C is presented here. The tabular and graphical outputs from SPSS are shown in full only for the overall remanufacturing process.

#### 4.2.1 Statistical Correlation

Statistical analysis was carried out for each activity time in the remanufacturing process for every engine studied. This was to understand whether there was a statistical correlation between the increased inspection and the subsequent remanufacturing activity time. The results of this analysis for the overall remanufacturing activity time for engine C only are given here.

The collected data for the overall remanufacturing process for engine C comprised a total of 420 individual times across all four inspection protocols. These were subject to one-way ANOVA analysis giving the results shown in Table 2 below. The significance of the results, denoted Sig, is the confidence with which it can be said that the change in processing time was due to the effects of the differing pre-processing inspection protocol.

The confidence level for the population was determined to be 95% based both upon the large size of the population and the use of data from the whole population rather than a sample (Lipsey and Hurley, 2009). Therefore the ANOVA significance figure must be lower than 0.05 for the results to demonstrate a statistically material benefit with the required 95% level of confidence. The strength of the correlation is given by the Significance in table 2 where the maximum correlation is 0 and the minimum correlation is 1, therefore any result lower than 0.05 shows a strong correlation.

The significance figure for the ANOVA analysis on the overall remanufacturing process for engine C was 0.000 as shown in Table 2 below. Therefore it is possible to be confident that the effect of increasing the content of the pre-processing inspection has been a material reduction in the overall processing time of the engine.

<b>OVERALL REMANUFACTURING PROCESS</b>					
	Sum of Squares	Df	Mean Square	F	Significance
Between Groups	2244064.267	3	748021.422	11352.218	0.000
Within Groups	27411.110	416	65.892		
Total	2271475.378	419			

Table 2 ANOVA Output for Engine C, Overall Processing Time

It was previously noted that the effects of increasing the pre-processing inspection did not bring a benefit in all activities and the full analysis of each activity for engine C demonstrates this. As an example, Table 3 shows the difference in activity time between protocols 1 and 3 and the statistical correlation (significance) for each of the individual remanufacturing activities. Once again the strength of the correlation is given by the Significance in table 2 where the maximum correlation is 0 and the minimum correlation is 1, therefore any result lower than 0.05 shows a strong

correlation. Negative numbers denote a decrease in time between activities times at protocols 1 and 3, positive numbers an increase.

Remanufacturing Activity	Time difference (minutes)	Significance
Decant and Inspect	5.90	0.000
Disassembly	-40.31	0.000
Block Remanufacture	-2.92	0.000
Head Remanufacture	-3.28	0.000
Crankshaft Remanufacture	-0.58	0.000
Camshaft Remanufacture	0.04	0.972
Valve Remanufacture	-0.08	0.472
Connecting Rods	0.00	0.879
Rocker Shaft Remanufacture	0.00	0.996
Oil Pump Remanufacture	0.01	0.995
Fuel Lift Pump Remanufacture	-0.31	0.000
EGR Valve Remanufacture	-0.56	0.000
Vacuum Pump Remanufacture	-0.03	0.509
Starter Motor Remanufacture	-18.78	0.000
Alternator Remanufacture	-6.87	0.000
Flywheel Remanufacture	-0.39	0.000
Turbocharger Remanufacture	-33.35	0.000
Small Parts Remanufacture	-24.09	0.000
Engine Kitting	-14.66	0.000
Engine Assembly	-0.34	0.061
Post-Production Test	-0.26	0.114
Paint, Pack and Despatch	-0.06	0.217
Overall Remanufacture	-140.90	0.000

Table 3 Statistical Correlation between Protocols 1 and 3 for Engine C

The within-engine analysis also revealed a limit to the benefits accrued from the increasing content of the inspection protocols and this is illustrated in Figure 3 which plots the overall remanufacturing time for every engine C studied. It clearly shows that the processing time drops as the pre-processing inspection content is increased until protocol 4 when the benefit is curtailed. The benefits still outweigh the additional time required for further inspection but no further benefit from inspecting additional elements than at protocol 3 is seen.

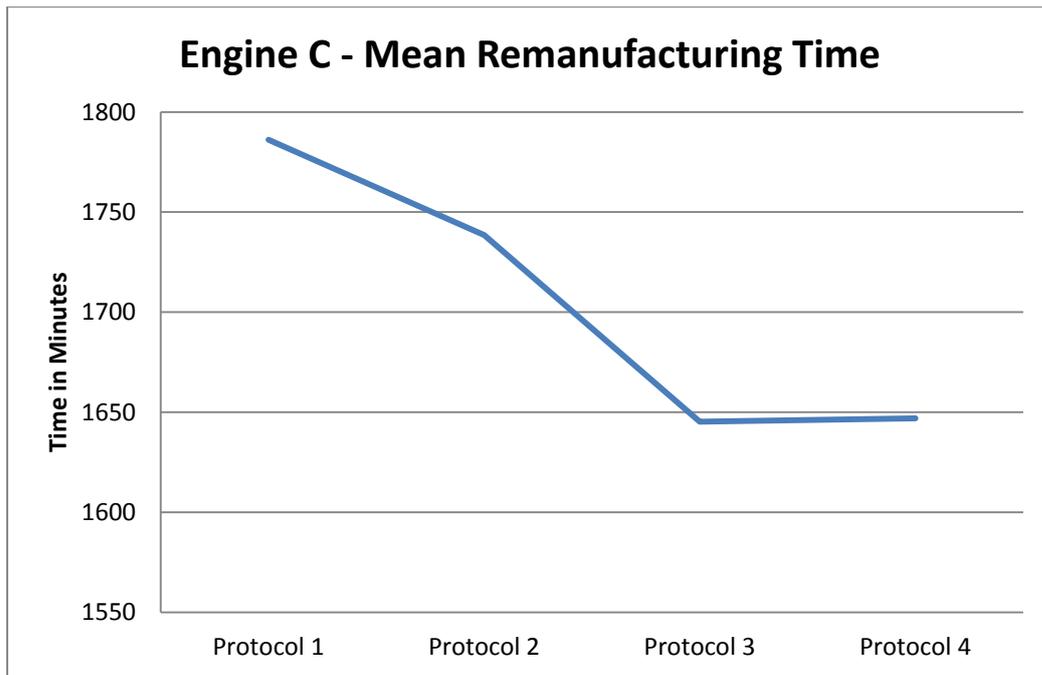


Figure 3 Mean Remanufacturing Time for Engine C across each protocol

### 4.3 Discussion

It can be seen from the results shown that increasing the content of the pre-processing inspection activity provided a significant benefit for some components and not others. It is possible in most cases to detect underlying themes that group these components together and explain the differences.

The benefits do not necessarily continue to accrue as the pre-processing inspection content increases as shown in Figure 2 but are limited. This is because there is a finite amount of information concerning the condition of components that can be ascertained prior to disassembly and consequently once that point is reached, further inspection adds to the processing time without providing a commensurate benefit.

Significantly altered remanufacturing activities or components include: disassembly, cylinder block, cylinder head, crankshaft, alternator, fuel lift pump, EGR valve, starter motor, turbocharger, flywheel, small parts salvage and engine kitting.

These latter have at least one of the following characteristics:

- Complex geometry including internal ports;
- Large number of sub-components; or
- Constructed from or comprising of multiple materials.

These characteristics make pre-processing inspection worthwhile because they all introduce additional variables to the remanufacturing activity. Components with complex geometry are more likely to be affected by a build up of contaminants or to experience wear or corrosion on changing surface forms. This is particularly noticeable on turbochargers where the complex blade profile experiences more corrosion than the smoother, simpler sides of the chamber despite being exposed to

the same operating conditions. Likewise components that have either a large number of sub-components or are constructed from multiple metals can be subject to corrosion aggravated by contact between differing materials or the inconsistent wear and fatigue created by the repetitive hot and cold cycling of an engine. Water and coolant pumps often exhibit these types of wear patterns particularly around the turbine and shaft joints where the differing metals increase the corrosion at the joint.

The benefits accrue from the knowledge obtained at the point of inspection. This information was used to inform the scheduling and procurement operations enabling less material to be purchased because of assumed requirements but rather purchased against a known demand. Longer term this allowed inventory levels to reduce. This latter cannot be quantified as it was ongoing at the point at which the research ended. The knowledge gained also partly mitigated the effects of uncertainty (noted by remanufacturers as a very significant issue) because early knowledge of part number, condition and type of received cores enabled additional cores of a suitable type to be sourced in time to meet demand.

The results noted for engine C were consistent with those seen in the other three engines and consequently it can be inferred that components with these characteristics or activities involving parts with the same demonstrate a reduction in their overall processing time but that this benefit is curtailed once the limit of information gained by inspection is reached.

#### **4.4 Use of the Research Findings**


The intention of the researcher was to make the findings of the work accessible to those in industry by translating them into a tool to aid decision-making about appropriate pre-processing inspection. This tool would then form part of the package of work to be validated.

##### **4.4.1 Decision-Making Model**

Understanding what made pre-processing inspection useful enabled decisions to be made about what level of inspection was appropriate for each significant component or assembly within the engine cores. Careful consideration of how these factors could be translated into a means of decision-making led to the conclusion that a decision tree method would be an effective means to make the research useful to others. This is because a decision tree clearly lays out all the options so that a logical path can be followed, they allow the full consequences of each part of the decision to be seen in advance and they provide a simple visual format that can be replicated anywhere.

This led to development of the process model illustrated in Figure 3.

This process model was used to route all cores and their sub-components towards the appropriate inspection level. The benefits of inspection for sub-assemblies such as starter motors and turbochargers were sufficiently great that a new handling process was implemented. These sub-assemblies were removed from the cores upon receipt at the remanufacturing facility and sent to the specialist department directly, even when the core they were removed from was stored for future use. Any resulting openings were plugged against the ingress of water or other contaminants. This had the added bonus of better protection for components prior to remanufacture, helping to reduce the activity time as less cleaning and other decontamination work was necessary.

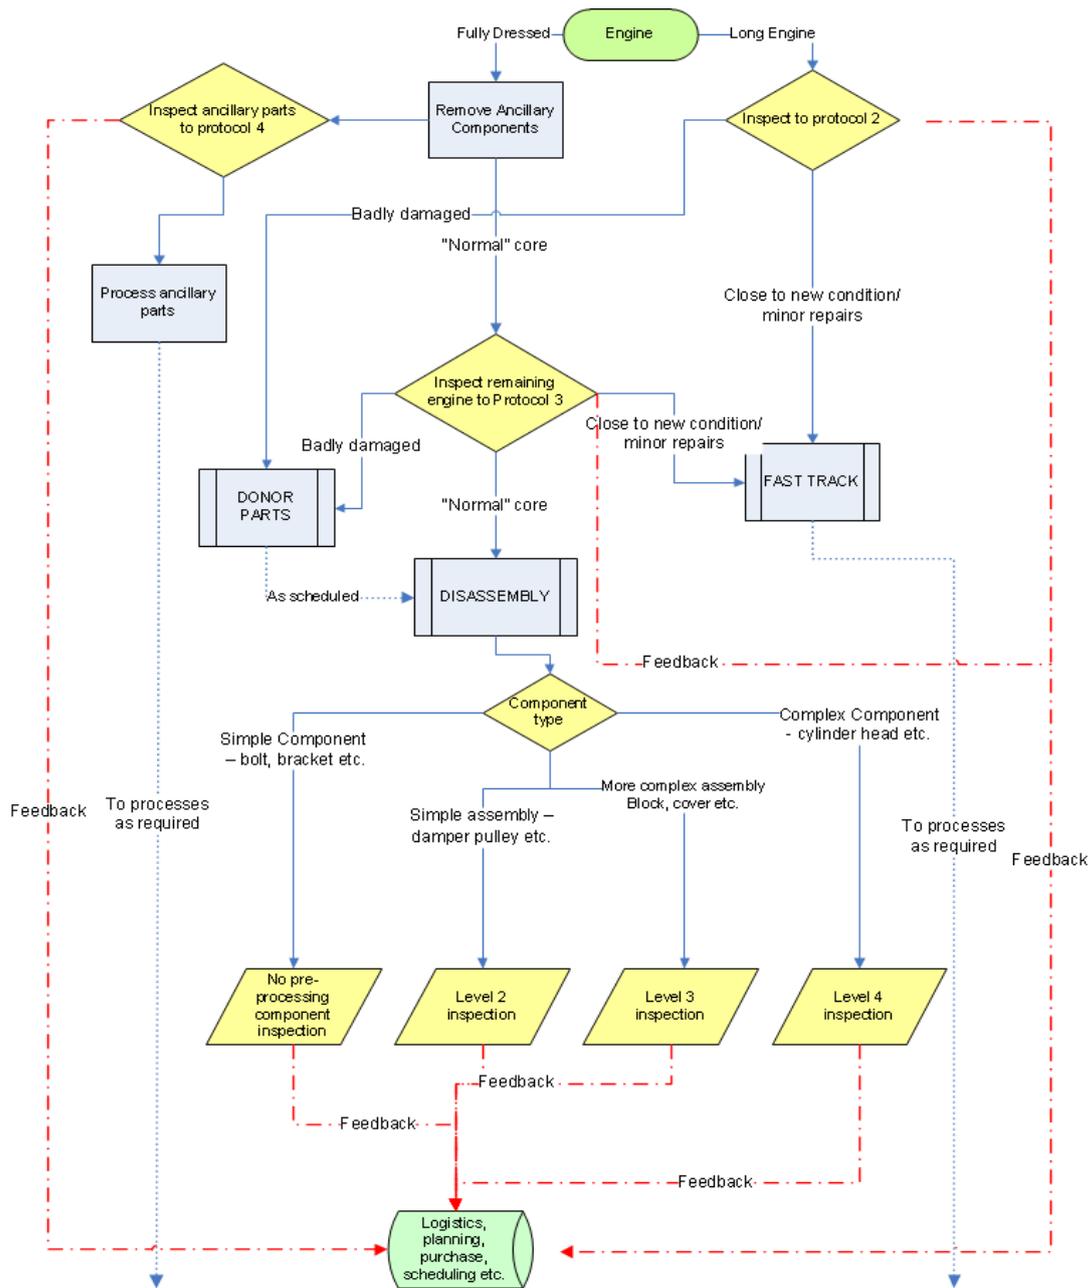

**Figure 3 Overall Decision Making Process at the Rushden Remanufacturing Facility**

The most important aspect was the feedback loop. The information resulting from any inspection process was sent to the Scheduling Manager, the Logistics Manager and the Production Manager. This enabled informed decisions to be made to minimise delays, shortages and to maintain flow throughout the factory.

### 5. Validation of the Results

The value of the research findings lies in their ability to be useful. These research findings were presented to the management teams in two Caterpillar remanufacturing facilities along with the decision-making methodology. Validation was undertaken

with different engines from those studied so that the results could be tested thoroughly by examining if these other products demonstrated similar patterns to those studied.

Validation in different facilities would verify that the processes developed from the research findings were applicable to more widely than at just one Caterpillar facility. Caterpillar Remanufacturing facilities, whilst held to the same corporate quality standards, operate with a good degree of autonomy. The relevant people at each facility were given training in its use and, having made the appropriate decisions for each product the new inspection regimes were put in place. The training for the inspection process was that given to operatives for the experimental phase.

Each facility reported a reduction the overall processing time for each product. These varied between as little as 0.78% to a maximum of 19.53%. Confidentiality prevents actual figures being given for this phase however each facility reported an overall saving in time, 4.91% in one case and 5.12% in the other. The facilities also expressed satisfaction with the information gained and their increased ability to schedule both new components and additional salvage operations. This latter was particularly beneficial in the case of using expensive equipment or processes such as metal deposition.

## **6. Future Work and Limitations**

The experimentation was limited by the available tools and techniques for inspecting cores and could be extended with the use of other non-destructive technology such as ultrasound testing. It was also based exclusively in the automotive sector and concerned engines and components, work to discover whether the factors identified were applicable to other remanufactured products would be beneficial.

## **7. Conclusions**

This research has identified the factors that affect decisions concerning pre-processing inspection. It has determined that these criteria can be used improve the efficiency of the remanufacturing process and also improve the accuracy of cost estimation. It has shown that in the automotive remanufacturing sector time savings of up to 20% can be achieved by properly inspecting cores prior to processing.

## **8. Acknowledgements**

The authors acknowledge with thanks that this research was part-funded by The Royal Commission for the Exhibition of 1851 and conducted through the goodwill of Caterpillar Remanufacturing Limited, Rushden.

## **9. References**

All-Party Parliamentary Sustainable Resource Group (2014) "Remanufacturing: Towards a Resource Efficient Economy" Policy Connect: London [online] Available from:

[http://www.policyconnect.org.uk/apsrg/sites/site\\_apsrg/files/apsrg\\_-\\_remanufacturing\\_report.pdf](http://www.policyconnect.org.uk/apsrg/sites/site_apsrg/files/apsrg_-_remanufacturing_report.pdf) {Accessed on 14/11/2014}

Antony, J. (2003) "Design of Experiments for Engineers and Scientists" Butterworth-Heinemann: Oxford

- Aras, N., Boyaci, T. and Verter, V. (2004) "The effect of categorizing returned products in remanufacturing" *IIE Transactions* 36, pp. 319–331
- Brent, A.C. and Steinhilper, R. (2004) "Opportunities for remanufactured electronic products from developing countries: Hypotheses to characterise the perspectives of a global remanufacturing industry" *Proceedings of 7<sup>th</sup> AFRICON Conference in Africa Vol. 2*, pp. 891-896
- Campbell, D. J. and Stanley, J. C. (1963) "Experimental and quasi-experimental designs for research" Chicago: Rand-McNally
- Chapman, A., Bartlett, C., McGill, I. Parker, D and Walsh, B. (2010) "A snapshot of the UK remanufacturing industry 2009" *Resource Recovery Forum: Skipton*
- Charness, G., Gneezy, U. and Kuhn, M.A. (2011) "Experimental methods: Between-subject and within-subject design" *Journal of Economic Behavior & Organization* 81 (2012) pp. 1– 8
- DEFRA (2003) "Landfill Directive Briefing Paper" London: DEFRA Available at: <http://www.defra.gov.uk/environment/waste/strategy/legislation/landfill/> { Accessed on 20<sup>th</sup> January 2010 }
- DEFRA (2009) "estimated total annual waste arisings, by sector" London: DEFRA Available at: <http://www.defra.gov.uk/evidence/statistics/environment/waste/kf/wrkf02.htm> { Accessed on 17<sup>th</sup> January 2010 }
- Errington, M. (2009) "Business Processes and Strategic Framework for Inspection in Remanufacturing" PhD Dissertation, The University of Exeter, UK
- Ferguson, M., Guide, V.D.R., Koca, E. and Souza, G. (2009) "The value of quality grading in remanufacturing" *Production and Operations Management* 18 (3), pp. 300–314
- Ferrer, G. (2001) "On the widget remanufacturing operation" *European Journal of Operational Research* 135, pp. 373–393
- Fleischmann, M., Bloemhof-Ruwaard, J.M., Dekker, R., van der Laan, E., van Nunen, J. and Van Wassenhove, L.N. (1997) "Quantitative models for reverse logistics: a review" *European Journal of Operational Research* 103, pp. 1–17
- Georgiadis, P. and Vlachos, D. (2004) "The effect of environmental parameters on product recovery" *European Journal of Operational Research* 157, pp. 449-464
- Guide, V.D.R. (2000) Production planning and control for remanufacturing: industry practice and research needs. *Journal of Operations Management* 18, pp. 467–483
- Guide, Jr., V.D.R. and Jayaraman, V. (2000) "Product Acquisition Management: current industry practice and a proposed framework" *International Journal of Production Research*, 38, pp. 3779–3800.

- Hatcher, G.D., Ijomah, W.L., and Windmill, J.F.C. (2013) "Integrating design for remanufacture into the design process: the operational factors" *Journal of Cleaner Production* 39 (2013) pp. 200-208
- Ijomah, W.L. (2002) "A model-based definition of the generic remanufacturing business process" PhD Dissertation: The University of Plymouth, UK
- Ijomah, W.L., McMahon, C., Hammond, G. and Newman, S. (2007) "Development of design for remanufacturing guidelines to support sustainable manufacturing" *Robotics and Computer Integrated Manufacturing* 23, pp. 712-719
- Ilgin M.A. and Gupta, S. (2010) "Environmentally conscious manufacturing and product recovery (ECMPRO): A review of the state of the art" *Journal of Environmental Management* 91, pp. 563–591
- Inderfurth, K. (2005) "Impact of uncertainties on recovery behavior in a remanufacturing environment" *International Journal of Physical Distribution & Logistics Management* 35, pp. 318–336
- Iversen, G.R. and Norporth, H. (1987) "Analysis of Variance" Sage University Paper Series on Quantitative Applications in the Social Sciences, No. 07-001
- Ketzenberg, M.E., van der Laan, E. and Teunter, R.H. (2006) "Value of information in closed loop supply chains" *Production & Operations Management* 15, pp. 393–406
- Liang, Y., Pokharel, S. and Lim, G. H. (2009) "Pricing used products for remanufacturing" *European Journal of Operational Research* 193 (2009) pp. 390–395
- Lipsey, M. W. and Hurley, S. M. (2009) "Design sensitivity: Statistical power for applied experimental research" In L. Bickman & D. Rog (Eds). "The SAGE Handbook of Applied Social Research Methods" (2<sup>nd</sup> ed.) Los Angeles: Sage, Chapter 2, pp. 44-76
- Lund, R.T. (1984), "Remanufacturing: the experience of the USA and implications for the developing countries" World Bank Technical Paper No. 3
- Mähl, M. and Östlin, J. (2007) "Lean Remanufacturing – Material Flows at Volvo Parts Flen" Masters Dissertation: Uppsala University: Sweden
- Mukhopadhyay, S. and Ma, H. (2008) "Joint procurement and production decisions in remanufacturing under quality and demand uncertainty" *International Journal of Production Economics* 120 (2009) pp. 5–17
- Östlin, J., Sundin, E. and Björkman, M. (2008) "Importance of closed-loop supply chain relationships for product remanufacturing" *International Journal of Production Economics* 115, pp. 336–348

- Parkinson, H. J. and Thompson, G. (2003) "Analysis and taxonomy of remanufacturing industry practice" *Proceedings of the Institution of Mechanical Engineers Vol. 217 Part E: J. Process Mechanical Engineering*
- Polit, D.F. and Hungler, B.P. (1999) "Nursing Research: Principles and Methods" (6<sup>th</sup> ed.) Philadelphia: J. B. Lippincott.
- Ridley, S.J. (2013) "Increasing the Efficiency of Engine Remanufacture by Optimising Pre-Processing Inspection – A comprehensive study of 2196 engines at Caterpillar Remanufacturing in the UK" PhD Dissertation: The University of Strathclyde, UK
- Savaskan, R.C., Bhattacharya, S. and Van Wassenhove, L.N. (2004) "Closed-loop supply chain models with product remanufacturing" *Management Science* 50, pp. 239–252.
- Solomon, R. L. (1949) "An extension of control group design" *Psychological Bulletin*, 46, pp. 137-150
- Subramoniam, R., Huisingh, D. and Chinnam, R. (2009) "Remanufacturing for the automotive aftermarket-strategic factors: literature review and future research needs" *Journal of Cleaner Production* 17, pp. 1163–1174
- Sutherland, J.W., Adler, D.P., Haapala, K.R. and Kumar, V. (2008) "A comparison of manufacturing and remanufacturing energy intensities with application to diesel engine production" *CIRP Annals - Manufacturing Technology* 57 pp. 5–8
- Tang, O., Grubbström, R.W. and Zanoni, S. (2007) "Planned lead time determination in a make-to-order remanufacturing system" *International Journal of Production Economics* 108, pp 426–435
- Teunter, R.H. and Flapper, S.D.P. (2010) "Optimal core acquisition and remanufacturing policies under uncertain core quality fractions" *European Journal of Operational Research*, doi: 10.1016/j.ejor. 2010.06.015
- Toktay, L.B., Wein, L.M. and Zenios, S.A. (2000) "Inventory management of remanufacturable products" *Management Science* 46, pp. 1412–1426
- Womack, J.P., Jones, D.T., and Roos, D. (2007) "The Machine That Changed the World" New ed. New York: Simon and Schuster Inc.