



**Tezdogan, Tahsin and Incecik, Atilla (2016) CFD simulations of vertical ship motions in shallow water. In: International Conference on Maritime Technology 2016, 2016-07-16 - 2016-07-18. ,**

This version is available at <https://strathprints.strath.ac.uk/63328/>

**Strathprints** is designed to allow users to access the research output of the University of Strathclyde. Unless otherwise explicitly stated on the manuscript, Copyright © and Moral Rights for the papers on this site are retained by the individual authors and/or other copyright owners. Please check the manuscript for details of any other licences that may have been applied. You may not engage in further distribution of the material for any profitmaking activities or any commercial gain. You may freely distribute both the url (<https://strathprints.strath.ac.uk/>) and the content of this paper for research or private study, educational, or not-for-profit purposes without prior permission or charge.

Any correspondence concerning this service should be sent to the Strathprints administrator: [strathprints@strath.ac.uk](mailto:strathprints@strath.ac.uk)

# CFD Simulations of Vertical Ship Motions in Shallow Water

Tahsin Tezdogan<sup>1\*</sup> and Atilla Incecik<sup>2</sup>

1. Department of Naval Architecture, Ocean and Marine Engineering, University of Strathclyde, Glasgow G4 0LZ, UK

2. Department of Naval Architecture, Ocean and Marine Engineering, University of Strathclyde, Glasgow G4 0LZ, UK

**Abstract:** The seakeeping behaviour of a vessel in shallow water differs significantly from its behaviour in deep water. In shallow water, a vessel's motion responses to incident waves will be affected by hydrodynamic effects caused by the presence of a finite depth. Given that a vessel will sail in shallow water at various times during its service life, such as when entering harbours, it is important to have an understanding of the influence of shallow water on ship motions. In this study, using a commercial unsteady Reynolds-Averaged Navier-Stokes solver, a numerical study of ship motions in shallow water was carried out. Firstly, the characteristics of shallow water waves were investigated by conducting a series of simulations. Then, a full-scale large tanker model was used as a case study to predict its heave and pitch responses to head waves at various water depths, covering a range of wave frequencies at zero speed. The motion results obtained were validated against related experimental studies available in the literature, and were also compared to those from 3-D potential theory. The results were found to be in good agreement with the experimental data. Finally, it was shown that vertical motions were significantly affected by shallow water.

**Keywords:** seakeeping; computational fluid dynamics; RANS solver; shallow water; ship motions

**Article ID:** 1671-9433(2010)01-0000-00

## 1 Introduction

Over the last decade, an increasing number of large ships, such as Very Large Crude Carriers (VLCC) have called for a need to understand the performance and behaviour of such ships in shallow water. As indicated by Oortmerssen (1976a), the draft of fully loaded VLCCs is so large that it is often necessary to dredge approach channels around harbours, to enable such ships to enter harbours without grounding. In addition to harbours, even some open sea areas (for instance some areas in the North Sea) can be regarded as shallow water.

These large vessels are loaded and unloaded in exposed areas, where they are moored or secured to buoys or jetties. These designated terminals are located as close to shore as possible, mostly in shallow water. In order to diminish the risk of grounding for these ships, and to design and construct channels appropriately, it is critical to study vertical ship motions (heave and pitch) in shallow water (Oortmerssen, 1976b).

According to Oortmerssen (1976b), limited water depth has a perceptible influence on ship motions in waves, in particular when the ratio of water depth to draft of the ship is less than four. He claims that this effect becomes significant when the water depth is less than twice that of the draft. Beukelman and Gerritsma (1982) later contested this claim, instead suggesting the ratio to be two and a half.

Ship motions in response to incident waves in shallow water are affected in two ways (Oortmerssen, 1976b):

- i. Firstly, the incoming waves are affected due to the presence of a finite water depth. The consequential wave forces/moments exerted on the vessel therefore vary from those in deep water conditions.
- ii. Secondly, the hydrodynamic coefficients (added mass and damping) of the ship will change, stemming from the effect of the sea bed.

There have been many attempts to predict wave excited forces and moments on a vessel, and motion responses of a vessel, in shallow water. From a seakeeping perspective, the use of two-dimensional strip theory methods to predict ship responses to waves, using a deep water assumption, can give satisfactory results at moderate speeds for conventional ship geometries. However, the use of strip theory is questionable when applied to shallow water conditions, since viscosity effects are amplified when the keel is very close to the seabed (Beukelman and Gerritsma, 1982). Because the strip theory is a two-dimensional theory, it assumes that the water flow propagates entirely underneath the ship. However Oortmerssen (1976a) claims that in shallow water, three-dimensional effects become considerably important because the water flow passes partly underneath the vessel and partly around the two ship ends. Even in some extreme cases, water can flow only around the ends of the vessel. This therefore causes a deviation from the two-dimensional flow features around the bow and stern ends.

The vast majority of the numerical research in this field relies on the assumptions from potential flow theory, including free

---

**Received date:** 15.04.2016

**Foundation item:** Supported by the University of Strathclyde

**\*Corresponding author Email:** tahsin.tezdogan@strath.ac.uk

© Harbin Engineering University and Springer-Verlag Berlin Heidelberg 2010

surface effects. However, effects which are ignored in potential theory, such as breaking waves, turbulence and viscosity, are the most significant for shallow water problems and should therefore be included in the numerical codes. Reynolds-Averaged Navier-Stokes (RANS) approaches, for example, are very good alternatives to potential flow theory as they can directly account for viscous effects in their calculations.

Recently, CFD-based RANS simulations have also been used to study shallow water problems, such as finite-bottom effects on ship resistance, ship squat, free surface wave patterns, ship-to-ship interactions and ship maneuverability.

Sakamoto et al. (2007) presented RANS simulations and validation studies for a high-speed Wigley hull in deep and shallow water utilising CFDSHIP-IOWA, a general purpose ship hydrodynamics CFD code. Their results include resistance predictions and wave pattern analyses for a range of forward speeds in calm waters. Following this, Jachowski (2008) carried out a study on the assessment of ship squat in shallow water employing Fluent, a commercial RANS solver. He used a model scale KCS to calculate its squat for several water depths at different ship speeds. Then, Zou and Larsson (2013), using a steady-state RANS solver (SHIPFLOW), performed a numerical study on the ship-to-ship interaction during a lightening operation in shallow water. They used an Aframax tanker and the KVLCC2 in model scale, both appended with rudder and propeller. Also, Prakash and Chandra (2013) studied the effect of confined waters on ship resistance at various speeds, using Fluent as a RANS solver. They concluded that the CFD technique can successfully be used to predict ship resistance and the free surface wave pattern in shallow water. Finally, Castiglione et al. (2014) investigated the interference effects of wave systems on a catamaran in shallow water. They used CFDSHIP-IOWA as a RANS solver to calculate the resistance and the interference factor of the DELFT catamaran in two separation distances at various water depths. Their simulations were carried out in calm water conditions.

During this literature review, it was noted that the majority of the numerical results obtained in shallow water were not actually validated. Although there are several benchmark data sets for researchers to compare their deep water results with, unfortunately no benchmark ship data exists for researchers studying shallow water problems. This shortfall was highlighted in the latest (27<sup>th</sup>) International Towing Tank Conference (ITTC) and it was concluded that knowledge of the motions of large ships and floating structures in shallow water still remains a challenging issue. The ITTC's Ocean Engineering Committee has therefore suggested the introduction of benchmark data, to validate numerical methods based on the potential theory or CFD (ITTC, 2014).

In addition, to the best of our knowledge, no specific study exists which aims to predict the motion responses of a vessel

to waves in shallow water, using a CFD-based RANS approach. Therefore, this paper addresses the gap in our current knowledge by calculating the vertical motions of a ship against head seas in shallow water, utilising a RANS solver. In this research, an unsteady Reynolds-Averaged Navier Stokes (URANS) approach was applied using the commercial CFD software Star-CCM+ version 9.0.2, which was developed by CD-Adapco. Additionally, the supercomputer facilities at the University of Strathclyde were utilised to allow much faster and more complex simulations.

Firstly, before starting the real ship motion simulations, the effect of a finite water depth on incoming waves was investigated by conducting a series of simulations in the absence of a ship model. In this part of the study, the intention was to observe the degeneration in the incident wave form due to the sea bottom effect. To do this, nonlinear waves were simulated in three different water depths, and the free surface elevation was measured at various locations within the solution domain.

Then, a 200 kDWT tanker was chosen for this study due to the availability of its geometry and experimental data conducted in shallow water, to validate our CFD model.

A full-scale tanker model was used for all simulations, to avoid scaling effects. The model was used without any appendages to mimic the real experimental conditions. All CFD simulations were performed in waves at a zero ship speed. The simulations were carried out in three different ratios of water depth to draft ( $\delta=1.2, 3.0$  and  $4.365$ ). The obtained results for  $\delta=1.2$  and  $4.365$  were compared to those taken from the experimental study of Oortmerssen (1976a, b) and Pinkster (1980), respectively. During all of the simulations, the heave and pitch time histories of the vessel in question were recorded, free surface wave patterns were obtained and the free surface wave elevations in different locations alongside the ship model were monitored. The results will cover heave and pitch transfer functions (or Response Amplitude Operators, RAOs) of the vessel in question, covering a range of wave frequencies in various water depths.


This paper is organised as follows: Section 2 gives the main ship properties along with its lines plan, and introduces a list of simulation cases applied to the current CFD model. Then, in Section 3, the numerical setup of the CFD model is explained, with details provided in the contained sub sections. Following this, all of the results from this work are shown and discussed in detail in Section 4. Finally, in Section 5, the main results drawn from this research are briefly summarised.

## 2 Ship geometry and conditions


The ship motion simulations in shallow water were applied to the full-scale 200 kDWT class large tanker. Taking precedence from the experiments conducted by Oortmerssen (1976a, b) and Pinkster (1980), the rudder, propeller and bilge keels were not appended to the model. The main particulars of the ship are presented in Table 1, and its body plan is shown in Figure 1 (Oortmerssen, 1976b, Pinkster, 1980). A three-dimensional view of the vessel is illustrated in Figure 2.

**Table 1 Main properties of the 200 kDWT tanker**

|  |                        |
|--|------------------------|
| Length between perpendiculars (LBP)                          | 310.00 m               |
| Breadth (B)  | 47.17 m                |
| Depth (D)  | 29.70 m                |
| Loaded draft (T)   | 18.90 m                |
| Displacement ( $\Delta$ )                                    | 234,994 m <sup>3</sup> |
| Block coefficient (C <sub>B</sub> )                          | 0.847                  |
| Midship section coefficient (C <sub>M</sub> )                | 0.994                  |
| Prismatic coefficient (C <sub>P</sub> )                      | 0.855                  |
| Waterplane coefficient (C <sub>WP</sub> )                    | 0.900                  |
| Ship wetted area (S)   | 22,804 m <sup>2</sup>  |
| Longitudinal centre of buoyancy (LCB) from the midship, fwd+ | 6.61 m                 |
| Vertical centre of gravity (KG) from the base line           | 13.32 m                |
| Metacentric height (GM <sub>t</sub> )                        | 5.78 m                 |
| Transverse radius of gyration                                | 17.00 m                |
| Longitudinal radius of gyration                              | 77.47 m                |

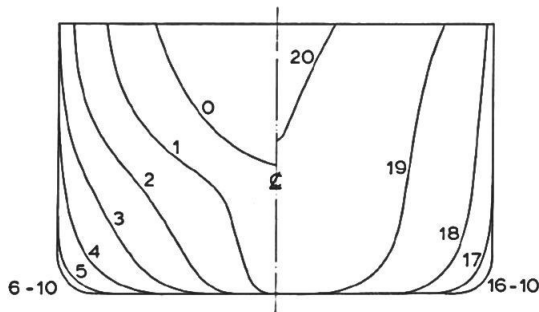

**Fig.1 Body plan of the tanker, taken from Oortmerssen, 1976b**



**Fig.2 A 3-D view of the tanker**

As waves approach a shore, they exhibit a reduction in wavelength ( $\lambda$ ) and wave celerity ( $c$ ), whilst the frequency remains the same. For a given wave period ( $T_w$ ), the wavelength is predicted according to the dispersion expression, which relates wave period to wavelength, as given in the equation below.

$$T = \left[ \frac{g}{2\pi\lambda} \tanh\left(\frac{2\pi h}{\lambda}\right) \right]^{-1/2}$$

where  $g$  denotes the gravitational acceleration ( $g=9.81 \text{ m/s}^2$ )

and  $h$  denotes water depth. Heave and pitch RAO curves will be plotted against the nondimensional frequency numbers,  $\omega' = \omega\sqrt{L/g}$  ( $L$ : Length between the perpendiculars in metres,  $\omega$ : wave frequency in rad/s).

The CFD simulations were performed at sixteen different conditions, as listed in Table 2, each identified by their case numbers. The characteristics of a wave are determined depending on the relationship between wavelength and water depth. It should be mentioned that in all the cases, the ratios of water depth to wavelength ( $h/\lambda$ ) are below the value of 1/2, which corresponds to shallow water waves. The wavelength of each simulation case was calculated using the above equation. However, it should be borne in mind that this equation is based on linear wave theory, and therefore the resulting wavelengths in the simulations will be different from those listed in Table 2. Having said that, the waves considered in this work are not steep waves, and hence this deviation is not expected to have a significant effect on the results.

The nondimensional period number ( $\tau$ ) shown in the last column of Table 2 was calculated by  $\tau = T_w(g/h)^{1/2}$ . As will be discussed in Section 3.2, this number is helpful when deciding which wave model should be used to model regular head waves within the computational domain.

**Table 2 Cases for which the CFD model is applied**

| Case no. | $h/T$    | Wave frequency (rad/s) | Frequency number | Wave steepness | Period number |
|----------|----------|------------------------|------------------|----------------|---------------|
| C        | $\delta$ | $\omega$               | $\omega'$        | $H/\lambda$    | $\tau$        |
| 1.1      | 1.200    | 0.200                  | 1.12             | 0.0118         | 20.66         |
| 1.2      |          | 0.300                  | 1.69             | 0.0210         | 13.77         |
| 1.3      |          | 0.400                  | 2.25             | 0.0222         | 10.33         |
| 1.4      |          | 0.500                  | 2.81             | 0.0318         | 8.26          |
| 1.5      |          | 0.600                  | 3.37             | 0.0333         | 6.89          |
| 2.1      | 3.000    | 0.200                  | 1.12             | 0.0098         | 13.07         |
| 2.2      |          | 0.300                  | 1.69             | 0.0140         | 8.71          |
| 2.3      |          | 0.400                  | 2.25             | 0.0167         | 6.53          |
| 2.4      |          | 0.500                  | 2.81             | 0.0199         | 5.23          |
| 2.5      |          | 0.600                  | 3.37             | 0.0252         | 4.36          |
| 3.1      | 4.365    | 0.178                  | 1.00             | 0.0071         | 12.17         |
| 3.2      |          | 0.267                  | 1.50             | 0.0095         | 8.11          |
| 3.3      |          | 0.357                  | 2.00             | 0.0139         | 6.07          |
| 3.4      |          | 0.443                  | 2.50             | 0.0191         | 4.89          |
| 3.5      |          | 0.532                  | 3.00             | 0.0188         | 4.07          |
| 3.6      |          | 0.623                  | 3.50             | 0.0118         | 20.66         |

### 3 Numerical set-up

Up until this point, this paper has provided a background to this study and has given an introduction to the work. The following section will provide details of the numerical simulation approaches used in this study and will discuss the numerical methods applied to the current CFD model.

### 3.1 Physics modelling

To model fluid flow, the solver employed uses a finite volume method, which uses the integral form of the conservation equations and divides the computational domain into a finite number of adjoining control volumes. In addition, the RANS solver employs a predictor-corrector approach to link the continuity and momentum equations.

The turbulence model chosen for use in this work was a standard k- $\epsilon$  model, which has been extensively used for industrial applications (CD-Adapco, 2014). Additionally, Querard et al. (2008) claim that the k- $\epsilon$  model is quite economical in terms of CPU time, compared to, for example, the SST turbulence model, which increases the required CPU time by nearly 25%. The k- $\epsilon$  turbulence model has also been used in many other studies performed in the same area, such as Kim and Lee (2011), Enger et al. (2010) and Ozdemir et al. (2014). In addition to this, as reported in Larsson et al. (2011), the majority of the numerical methods presented in the 2010 Gothenburg Workshop used either the k- $\epsilon$  or the k- $\omega$  turbulence model. At the workshop, most of the studies performed using Star-CCM+ as a RANS solver employed the standard k- $\epsilon$  model, as is used in this work. Lately, Tezdogan et al. (2015) performed URANS simulations using Star-CCM+, to predict heave and pitch motions, as well as the added resistance, of a full-scale KCS model in deep water conditions. They employed the k- $\epsilon$  model, and their results were found to be in good agreement with the available experimental results in the literature.

The ‘‘Volume of Fluid’’ (VOF) method was used to model and to position the free surface with a regular wave. In this study, a second-order convection scheme was used throughout all simulations in order to accurately capture sharp interfaces between the two phases, namely air and water.

In order to simulate realistic ship behaviour, a Dynamic Fluid Body Interaction (DFBI) module was used, with the vessel free to move in the pitch and heave directions. The DFBI module enabled the RANS solver to calculate the exciting forces and moments acting on the ship hull due to waves, and to solve the governing equations of rigid body motion in order to reposition the rigid body (Tezdogan et al., 2015, CD-Adapco, 2014).

### 3.2 Wave model

The commercial RANS solver employed in this study offers two suitable wave theories to describe regular waves: the fifth-order or the first-order Stokes waves. The theory of the fifth-order wave is based on the work of Fenton (1985).

According to CD-Adapco (2014), ‘‘this wave more closely resembles a real wave than one generated by the first-order method’’. However, Fenton (1985) points out that the fifth-order wave theory should not be used for large Ursell numbers (see the equation below). Det Norske Veritas (DNV) (2007) suggested that the fifth-order Stokes theory should only be applied to Ursell numbers less than 30. In addition, Fenton (1979) concluded in his study that for dimensionless period numbers greater than 8, the fifth-order Stokes wave theory should not be used, and that, instead, the fifth-order cnoidal wave theory should be used. Additionally, Fenton suggests the fifth-order Stokes waves should be used for nondimensional period numbers smaller than 8. Unfortunately, the RANS solver employed in this work does not provide the fifth-order ‘cnoidal wave theory’ to model incident waves and it is not possible to adjust the software package to model any other wave models. Given that linear wave theory can be used for all water depths, we used the first-order Stokes waves inside the solution domain for the cases with  $\tau > 8$ . For the other cases, the fifth-order Stokes waves were used to describe the wave at the inlet.

$$U_r = \frac{H\lambda^2}{h^3}$$

### 3.3 Choice of the time step

The Courant number is a useful indication to determine the time step. For time-accurate simulations, it should have an average value of 1 in all cells. This value signifies that the flow moves by about one cell size per time-step. If a second-order scheme is applied for time integration, in this case, the average Courant number should be less than 0.5.

Often, in implicit unsteady simulations, the time step is determined by the flow properties, rather than the Courant number. ITTC (2011) recommends the use of at least 100 time steps per period for motion responses. In this study, a very small time step (1/256 of the wave period) was used over a simulation period. It is of note that a first-order temporal scheme was applied to discretise the unsteady term in the Navier-Stokes equations.


### 3.4 Solution domain and boundary conditions

An overset mesh, also known as Chimera or overlapping mesh, was used to facilitate the motions of the full-scale ship model due to the incident waves. Rigid and deforming mesh motion options are available in the software package, but these methods have distinct disadvantages compared to the overset mesh approach when simulating bodies with large amplitude motions. The rigid motion approach causes difficulties for free surface refinement, especially in pitch, and deforming meshes may lead to cell quality problems. On the other hand, the overset region, which encompasses the hull body, moves with the hull over a static background mesh of the whole domain (Field, 2013). For this reason, using the overset mesh feature of the software package saves

computational costs, and allows the generation of a sufficiently refined mesh configuration around the free surface and the body, without compromising on the solution's accuracy.

When using the overset mesh feature, two different regions were created to simulate ship responses in waves, namely background and overset regions. A general view of the computational domain with the tanker hull model and the notations of selected boundary conditions are depicted in Figure 3.

In order to reduce computational complexity and demand, only half of the hull (the starboard side) is represented. A symmetry plane forms the centreline domain face in order to accurately simulate the other half of the model. It should be noted that in some figures given in this paper, the mirror image of the ship and domain is reflected on the port side for an improved visualisation.

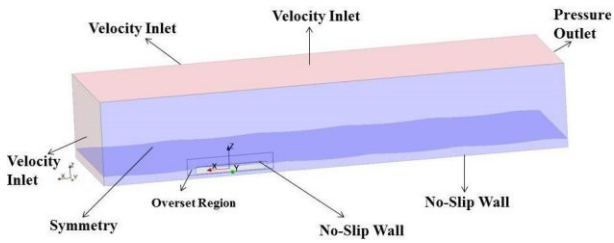


**Fig.3 A general view of the background and overset regions and the applied boundary conditions**

Figure 3 depicts that a velocity inlet boundary condition was set in the positive x-direction, where incident regular waves were generated. The initial flow velocity at this inlet condition was set to the corresponding velocity of the head waves. The negative x-direction was modelled as a pressure outlet since it fixes static pressure at the outlet. The top boundary was selected as a velocity inlet, whereas the bottom boundary was selected as no-slip wall boundary condition to account for the presence of the sea floor. The selection of the velocity inlet boundary condition for the top facilitates the representation of the infinite air condition. The symmetry plane, as the name suggests, has a symmetry condition, and the side of the domain (the negative y-direction) also has a velocity inlet boundary condition. These boundary conditions were used as they were reported to give the quickest flow solutions for similar simulations carried out utilising Star-CCM+ (CD-Adapco, 2014). The use of the velocity inlet boundary condition at the top and the side of the background prevents the fluid from sticking to the walls. In other words, it avoids a velocity gradient from occurring between the fluid and the wall, as in the use of a slip-wall boundary condition. Hence, the flow (including two phases: air and water) at the very top and very side of the background is directed parallel to the outlet boundary. This enables fluid reflections from the top and side of the domain to be prevented. It is of note that the top and side boundaries could

have been set as a slip-wall or symmetry plane (Tezdogan et al., 2015).

Date and Turnock (1999) point out that, just as the selection of the boundaries is of great importance, their positioning is equally important. ITTC (2011) recommends that, for simulations in the presence of incident waves, the inlet boundary should be located  $1-2L_{BP}$  away from the hull, whereas the outlet should be positioned  $3-5L_{BP}$  downstream to avoid any wave reflection from the boundary walls.

In this study, the size of the solution domain varied in each simulation case, depending on the wavelength of the incident waves. The locations of the boundaries used are illustrated in Figure 4, which gives front and side views of the domain. As shown in the figure, we suggest that the inlet boundary should be positioned one wave length or one and a half ship lengths, (whichever is greater), away from the vessel, so that waves can be appropriately generated before encountering the vessel. Also, it should be highlighted that throughout all the cases, in order to prevent wave reflection from the walls, the VOF wave damping capability of the software package was applied to the background region with a damping length equal to at least one wavelength. This numerical beach model was used in downstream and transverse directions, as depicted in Figure 4. For the wave damping modelling, Star-CCM+ adopts the method developed by Choi and Yoon (2009).



**Fig.4 The dimensions of the computational domain for the seakeeping simulations**  
a) Front view, b) Side view

### 3.5 Coordinate systems

Two different coordinate systems were adopted to predict ship responses due to head seas in shallow water. The same procedure was applied by Simonsen et al. (2013) and Tezdogan et al. (2015) to monitor motions of a container ship in deep water. Firstly, the flow field was solved, and the excitation force and moments acting on the ship hull were calculated in the earth-fixed coordinate system. Following this, the forces and moments were converted to a body local coordinate system which was located at the centre of mass of the body, following the motions of the body whilst the simulation progressed. The equations of motions were solved to calculate the vessel's velocities. These velocities were then converted back to the earth-fixed coordinate system. These sets of information were then used to find the new location of the ship and grid system. The overset grid system was repositioned after each time step.

### 3.6 Mesh generation


Mesh generation was performed using the automatic meshing

facility in Star-CCM+, resulting in a computation mesh of circa 14 million cells in total. A trimmed cell mesher was employed to produce a high-quality grid for complex mesh generating problems. The ensuing mesh was formed primarily of unstructured hexahedral cells with trimmed cells adjacent to the surface.

The computation mesh had areas of progressively refined mesh size in the area immediately around the hull, as well as the expected free surface, to ensure that the complex flow features were appropriately captured. The refined mesh density in these zones was achieved using volumetric controls applied to these areas.

To simulate ship motions in waves, the free surface mesh was generated based on the guidelines for ship CFD applications from ITTC (2011). According to these recommendations, a minimum of 80 cells per wavelength were used on the free surface. As proposed by Kim and Lee (2011), in order to capture the severe free surface flows such as slamming and green water incidents, a minimum of 150 grid points per wavelength were used near the hull free surface in both downstream and upstream directions. Additionally, a minimum of 20 cells were used in the vertical direction where the free surface was expected.

Figure 5 displays the refined mesh area around the free surface regular waves. It should be noted that, for an improved visualisation, Figure 5 is scaled by a factor of 10 in the vertical direction.

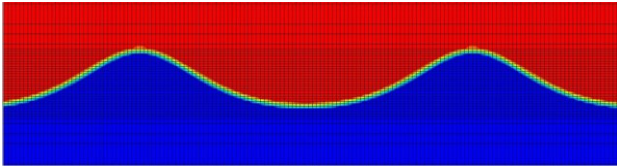

**Fig.5 A cross-section of the refined mesh area around the free surface waves (scaled by a factor of 10 in the vertical direction)**

## 4 Results and discussion

### 4.1 Formulations

The transfer functions of heave and pitch motions were calculated as follows:

$$TF_3 = \frac{x_{31}}{\zeta_{11}}$$

$$TF_5 = \frac{x_{51} L_{BP}}{\zeta_{11}}$$


where  $x_{31}$ ,  $x_{51}$  and  $\zeta_{11}$  are the first Fourier Series (FS) harmonic amplitudes of heave, pitch, and incident wave time histories, respectively. It must be clarified that in this study, the vertical motions were evaluated at the ship's centre of gravity.

### 4.2 Wave generation

Understanding the behaviour of nonlinear shallow water waves is critical not only for coastal structures but for CFD standing points as well. From a CFD point of view, the area in the domain where the free surface is expected should be predicted, in order to mesh this area more finely. We therefore performed a series of simulations to observe the wave form throughout the solution domain, before starting the fundamental ship motion simulations in shallow water. To do this, the overset region, including the ship model, was omitted, leaving only the background domain, which is demonstrated in Figure 3. In this specific study, the numerical damping was only applied in the downstream direction in the computational domain. It should also be mentioned that a second-order temporal scheme was applied in order to conduct this study on waves.

Troesch and Beck (1974) also performed such wave analyses experimentally before conducting seakeeping experiments with a ship model in shallow water, concluding that, "sinusoidal waves in shallow water are unstable and will degenerate fairly rapidly. In order to conduct the ship motion experiments, a knowledge of this process is essential". Also, many years ago, Korteweg and Vries (1895) theoretically investigated nonlinear shallow water problems. Their study particularly focused on the change of form of long waves advancing in a rectangular canal, by using a perturbation expansion on particle velocities, which has since borne their name in the literature.

Firstly, the degeneration of the shallow water waves as they advance inside the domain was investigated in a similar way to the experiments of Troesch and Beck (1974). For each three water depth conditions ( $\delta=1.2, 3.0$  and  $4.365$ ), the first harmonic amplitudes of a fifth-order Stokes wave ( $T_w=12.133$  s) as a function of distance down the inlet were calculated, aided by wave probes located at various distances from the inlet. The results obtained are demonstrated graphically in Figure 8. In the figure, the harmonic amplitudes were divided by the calculated wave amplitude at the inlet ( $\zeta_0$ ), and the distances ( $X$ ) were non-dimensionalised with respect to the actual wavelength ( $\lambda$ ).

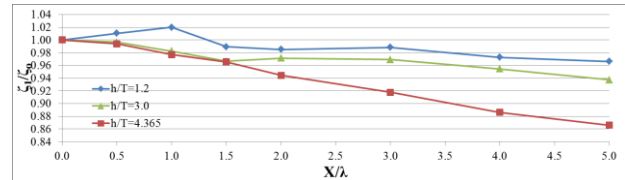

**Fig.6 Nondimensional 1<sup>st</sup> FS harmonic amplitudes plotted against nondimensional distance from the inlet at various water depth conditions ( $T_w=12.133$  s)**

The results presented in Figure 6 show that the first FS harmonic wave amplitudes mostly decrease as the wave travels through the domain. As can be observed from the


figure, the variation in wave amplitudes is most pronounced at Wave 3 ( $\delta=4.365$ ), followed by Wave 2 ( $\delta=3.0$ ). This is because Wave 3 has the longest wavelength amongst the three studied waves. It should be borne in mind that the period number of Wave 1 ( $\delta=1.2$ ) is 7.98, a value where the fifth-order wave theory is still applicable.

As discussed above, the 1<sup>st</sup> harmonic wave amplitudes varied along the simulation domain length. Therefore, for each simulation case, an average was taken of the wave amplitudes measured at three wave probes, located along the ship's length, to be used in the calculation of the transfer functions.


Figure 7 shows a comparison of the waves generated inside the domain (just after the symmetry plane) at different water depths. This figure also compares the appearances of the first- and fifth-order waves simulated at a water depth of 22.68 m. The simulations used to form Figure 7 were run for 10 wave periods, and the snapshots seen in the figure were taken after the simulations completed their run. It should also be mentioned that these simulations were initialised using undisturbed free surface. In addition to this, Figure 8 displays the free surface elevations at a distance of one wavelength away from the inlet, obtained using the first- and fifth-order Stokes wave theories. Wave 1 was used to provide the comparison shown in Figure 8.

Figures 7 and 8 jointly confirm that the resulting wave shape, obtained using the first-order wave theory, is different from the sinusoidal wave form. It is obvious that the obtained wave shape is degenerated as it propagates down the inlet. This result is in agreement with the experimental findings of Troesch and Beck (1974). From the comparison of the first- and fifth-order wave theories provided in Figures 7 and 8 in the shallowest water, it can be concluded that the simulated waves obtained using the fifth-order theory give more successful results compared to those using the first-order wave theory. Therefore it can be interpreted from these figures that the first-order wave theory is inadequate to generate a stable boundary condition for regular waves. As mentioned in Section 3.2, the first-order Stokes waves were used inside the solution domain for the cases with  $\tau > 8$ . It is therefore expected that these cases have degenerating waves, as can be seen in Figure 7 (d).

It should be mentioned that, in order to obtain transfer function accurately, the wave steepness can be chosen as desired. Linear wave theory inlet boundary conditions can be used for this reason without producing degenerating waves provided that the wave steepness is very small. For steeper waves, higher order shallow water theories should be used as boundary conditions, to avoid wave degeneration and provide to obtain realistic ship forces/moments.

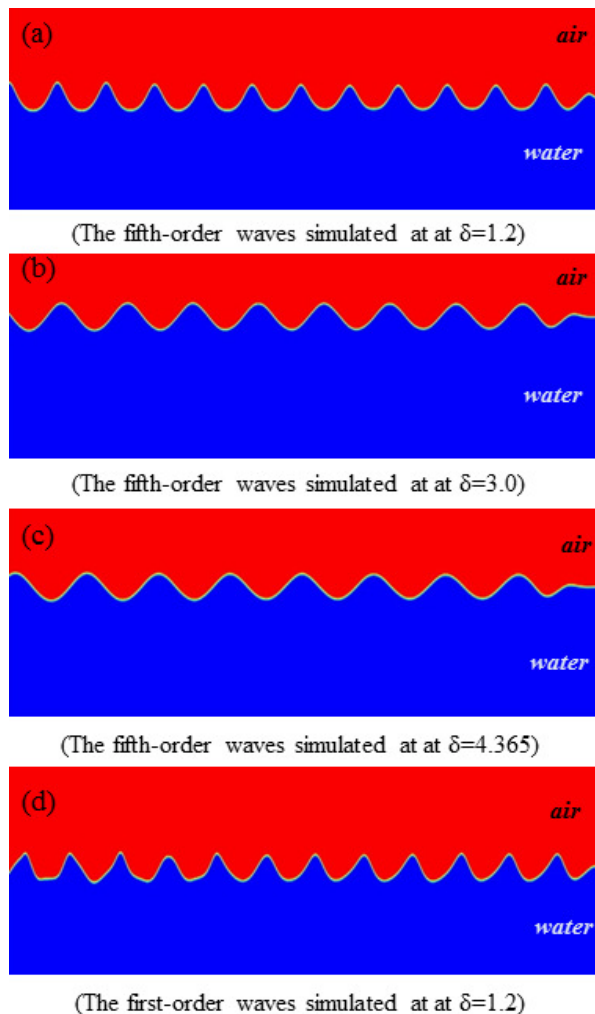

**Fig.7 A front view of the cross-sections of the simulation domain (just after the symmetry plane) with the waves ( $T_w=12.133$  s,  $H=5.66$  m) generated inside the domain (scaled by a factor of 20 in the vertical direction)**

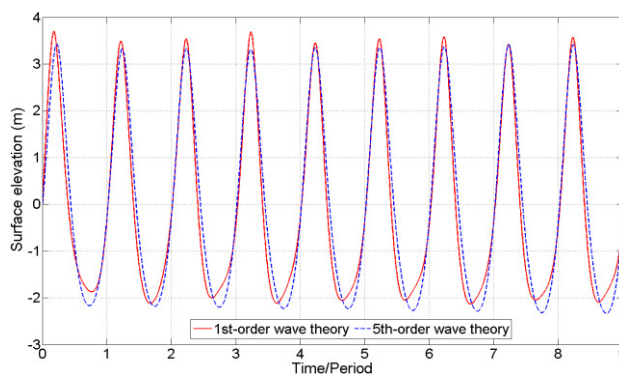

**Fig.8 Comparison of shallow water waves ( $T_w=12.133$  s,  $\tau=7.98$ ) simulated using the first- and fifth-order Stokes wave theories at a water depth of 22.68 m at one wavelength away from the inlet**


#### 4.3 Transfer functions

The heave and pitch transfer functions obtained by the current CFD model were first validated against the





experimental work of Oortmerssen (1976a, b) and Pinkster (1980), and were also compared to those obtained using a potential flow panel method for the two water depth conditions, namely  $\delta=1.2$  and 4.365, respectively. The panel methods used in this comparison were developed by the same researchers, who used a 3-D Green function to satisfy free surface and radiation conditions in the frequency domain. The results from the potential flow panel method were adapted from the published studies of the abovementioned researchers.

For the two water depth conditions, the heave and pitch transfer functions obtained by all three methods are graphically compared in Figures 9 and 10.

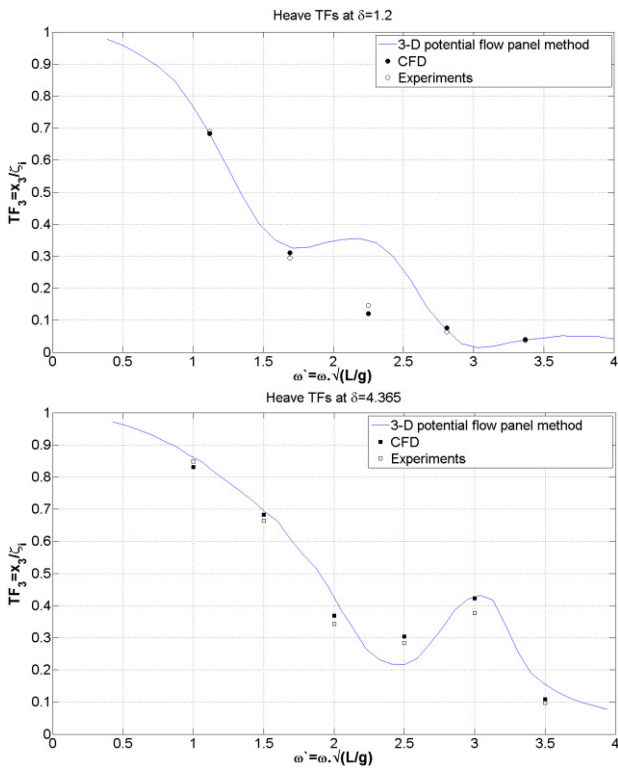

**Fig.9 Comparisons of the heave transfer functions using different methods in two different shallow water depths at zero speed. The upper half shows the responses at  $\delta=1.2$ , and the lower half shows the responses at  $\delta=4.365$**

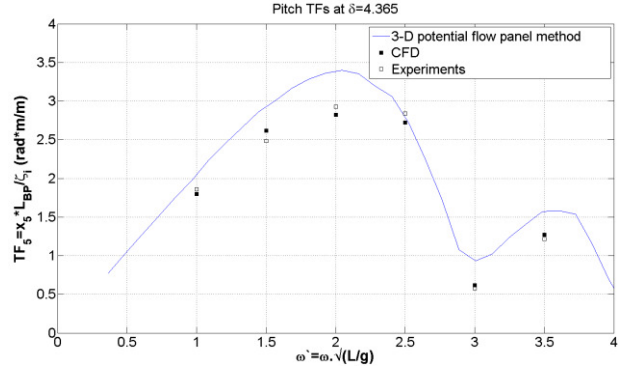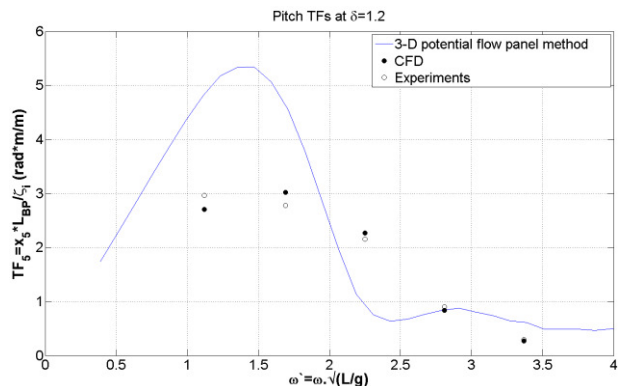

**Fig.10 Comparison of the pitch transfer functions using different methods in two different shallow water depths at zero speed. The upper half shows the responses at  $\delta=1.2$ , and the lower half shows the responses at  $\delta=4.365$**


As can be seen from Figures 9 and 10, the transfer functions, obtained using our URANS approach, are in fairly good agreement with the related experimental results. The discrepancies between our numerical results and the experimental results are more pronounced at  $\delta=1.2$ , which corresponds to the most shallow water condition. Since the keel is very close to the sea bed in this condition, a much finer mesh may have been needed to better capture the hydrodynamic effects between the keel and the sea floor. Additionally, it is clearly visible from the figures that in both motion modes the potential flow panel methods over-predict the motion responses compared to the experiments. When the CFD results are compared to those obtained from the panel methods, it can be concluded that the CFD method predicts the motion responses much better than potential flow theory, particularly for pitch motion. It should be mentioned that the differences between the experimental results and the panel methods may stem from the coarse panel generation and the assumptions made in the potential flow theory. It should also be borne in mind that the most recently developed 3-D potential flow theory-based codes, such as the Rankine source panel methods, may give more successful motion predictions than those presented in this paper.

It may be useful to emphasise that many previous studies, such as Schmitke (1978), have shown that viscous effects are likely to be the most significant, particularly in high amplitude waves and at high Froude numbers. Tezdogan et al. (2015) also came to the same conclusion in their study. They compared the URANS and potential flow theory results for the vertical motions of the KCS in response to head waves (in deep water) at two operational conditions (design speed and low speed), with the aim of evaluating the advantages of slow steaming operational conditions in terms of fuel consumption and CO<sub>2</sub> emissions. Their findings showed that the discrepancies between the URANS and potential flow theory results are amplified at higher Froude numbers ( $F_n$ ). Since the simulations in the current work were performed at  $F_n=0$ , the problem considered in this study was essentially close to the potential flow problem. It is highly likely that the

viscous effects would be much more significant if the vessel had a high forward speed.

Once the current URANS method was successfully validated, another set of simulations were repeated at  $\delta=3.0$ , in order to more precisely assess the effect of water depth on ship motions.

For all three water depths, the heave and pitch responses, predicted using our CFD model, were compared in Figure 11, over the non-dimensional wave frequencies. For each combination of transfer function and water depth, a curve was fitted through the obtained results using a Piecewise Cubic Hermite Interpolating Polynomial, in order to provide a better comparison among the responses.

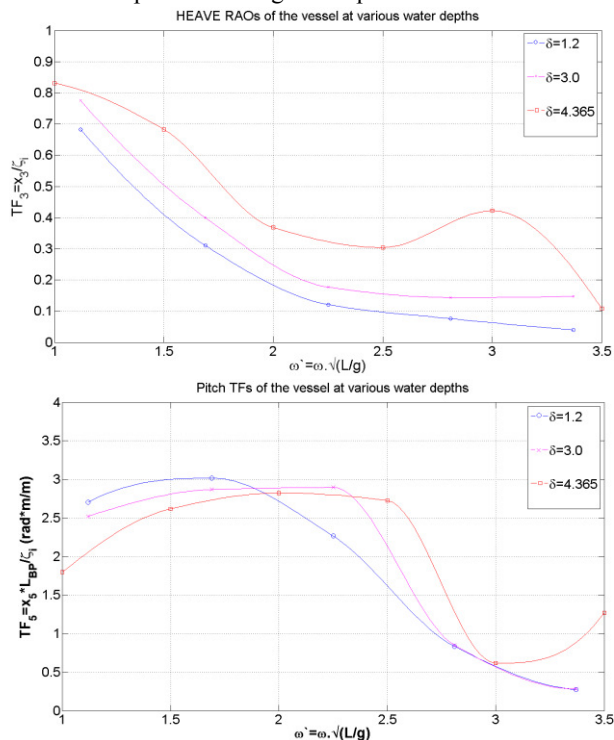

**Fig.11 A comparison of the ship responses (obtained using CFD) to incident head waves over the nondimensional frequency numbers in the three different shallow waters. The upper and lower halves show the heave and pitch transfer functions of the tanker, respectively**

From the comparison shown in Figure 11, it is clear to note that as the water depth becomes shallower, the heave amplitudes tend to decrease, whereas the pitch amplitudes tend to increase at low frequencies (or in long incident waves). However at high frequencies, a slight decrease is recognised in pitch responses as the water depth decreases. It can also be seen that for this tanker model, the maximum pitch response occurs when the ratio between wavelength and ship length ( $\lambda/L$ ) is around 1.0. Therefore, it is observed that, while the water depth to the draft ratio decreases, the peak in the pitch transfer functions shifts towards the lower frequencies. It is also worth noting that the RAO curves in Figure 11 show the same trend as those presented by Kim and

Kim (2013), who carried out similar analyses for a 100-metre Series 60 ship model using the 3-D Rankine panel method.

## 5 Concluding remarks and discussion

URANS simulations to predict the heave and pitch responses of a full scale very large tanker model to incident head waves were carried out at a zero forward speed.

Firstly, a numerical modelling set up was proposed in order to perform such analyses in shallow water using CFD. All procedures regarding mesh generation, treatment of wall functions, time step selection and wave modelling were presented in detail in the paper.

Next, before beginning the seakeeping analyses, a series of simulations were performed with nonlinear shallow water waves, to observe the change in their form inside the computational domain. It was observed that the wave amplitudes mostly decrease as the waves propagate further down inside the domain. Also, additional simulations with the waves revealed that the waves simulated using the fifth-order theory give more successful results compared to those simulated using the first-order wave theory.

Following this, sixteen simulation cases, which were composed of various combinations of water depth and wave frequency, were applied to the tanker model. The results were compared to the experimental data and also to those obtained from potential flow panel methods. The main results drawn from this comparison can be listed as follows:

1. The transfer functions, obtained using the CFD method, showed fairly good agreement with the available experimental data. The differences between our results and the experimental results were slightly more pronounced at  $\delta=1.2$ , where the keel is closest to the sea bed. Also, it was obvious that the 3-D panel methods over-predict the heave and pitch transfer functions compared to the experimental results. Overall, the URANS method predicted the motion responses much more successfully than the potential flow theory, particularly for pitch motions.
2. It was concluded that as water becomes shallower, heave motions decrease, whilst pitch motions increase at low frequencies. On the other hand, at high frequencies, a slight decrease was observed in pitch responses as the water depth decreases.
3. For the tanker model in question, the maximum pitch response occurred in waves of length equal to, or around, the ship length ( $\lambda/L=1.0$ ). It was observed that when the water depth decreased, the peak in the pitch transfer functions shifted to lower frequencies.

## Acknowledgement

The results were obtained using the EPSRC funded

ARCHIE-WeSt High Performance Computer (www.archie-west.ac.uk). EPSRC grant no. EP/K000586/1. The authors would like to thank Miss Holly Yu for her help with the final proofreading.

## References

- Oortmerssen GV (1976a). The motions of a moored ship in waves. Publication No. 510. Netherlands Ship Model Basin, Wageningen, The Netherlands.
- Oortmerssen GV (1976b). The motions of a ship on shallow water. *Ocean Engineering*, **3**, 221-255.
- Beukelman W, Gerritsma J (1982). The distribution of hydrodynamic mass and damping of an oscillating shipform in shallow water. *11th Scientific and Methodological Seminar on Ship Hydrodynamics*, 297-329, Varna, Bulgaria.
- Troesch A, Beck RF (1974). Experiments on ship motions in shallow water. Report No. 149. The Department of Naval Architecture and Marine Engineering, University of Michigan, College of Engineering.
- Kim T, Kim Y (2013). Numerical analysis on floating-body motion responses in arbitrary bathymetry. *Ocean Engineering*, **62**, 123-139, doi: 10.1016/j.oceaneng.2013.01.012.
- Tezdogan T, Demirel YK, Kellett O, Khorasanchi M, Incecik A, Turan O (2015). Full-scale unsteady RANS CFD simulations of ship behaviour and performance in head seas due to slow steaming. *Ocean Engineering*, **97**, 186-206, <http://dx.doi.org/10.1016/j.oceaneng.2015.01.011>.
- Larsson L, Stern F, Visonneau M (2011). CFD in ship hydrodynamics- Results of the Gothenburg 2010 Workshop. *Computational Methods in Marine Engineering IV (MARINE 2011)*, 17-36.
- Simonsen CD, Otzen JF, Joncquez S, Stern F (2013). EFD and CFD for KCS heaving and pitching in regular head waves. *Journal of Marine Science and Technology*, **18**(4), 435-459, doi: 10.1007/s00773-013-0219-0.
- Sakamoto N, Wilson RV, Stern F (2007). Reynolds-Averaged Navier-Stokes Simulations for High-Speed Wigley Hull in Deep and Shallow Water. *Journal of Ship Research*, **51**(3), 187-203.
- Jachowski J (2008). Assessment of ship squat in shallow water using CFD. *Archives of Civil and Mechanical Engineering*, **8**(1), 27-36.
- Zou L, Larsson L (2013). Numerical predictions of ship-to-ship interaction in shallow water. *Ocean Engineering*, **72**, 386-402, doi: 10.1016/j.oceaneng.2013.06.015.
- Prakash S, Chandra B (2013). Numerical estimation of shallow water resistance of a river-sea ship using CFD. *International Journal of Computer Applications*, **71**(5), 33-40.
- Castiglione T, He W, Stern F, Bova S (2014). URANS simulations of catamaran interference in shallow water. *Journal of Marine Science and Technology*, **19**(1), 33-51.
- International Towing Tank Conference (ITTC) (2014). Ocean Engineering Committee, Final report and recommendation to the 27th ITTC. *27th ITTC*, Copenhagen.
- Pinkster JA (1980). *Low frequency second order wave exciting forces on floating structures*. Ph.D. thesis, Delft University of Technology.
- CD-Adapco (2014). *User guide STAR-CCM+ Version 9.0.2*.
- Querard ABG, Temarel P, Turnock SR (2008). Influence of viscous effects on the hydrodynamics of ship-like sections undergoing symmetric and anti-symmetric motions, using RANS. *ASME 27th International Conference on Offshore Mechanics and Arctic Engineering (OMAE)*, Estoril, Portugal, 1-10.
- Kim SP, Lee HH (2011). Fully nonlinear seakeeping analysis based on CFD simulations. *21st International Offshore and Polar Engineering Conference*, Hawaii, USA, 970-974.
- Enger S, Peric M, Peric R (2010). Simulation of flow around KCS-hull. In: *Proceedings from Gothenburg 2010-A Workshop on Numerical Ship Hydrodynamics*, Gothenburg.
- Ozdemir YH, Barlas B, Yilmaz T, Bayraktar S (2014). Numerical and experimental study of turbulent free surface flow for a fast ship model. *Brodogradnja*, **65**(1), 39-54.
- Fenton JD (1985). A fifth-order Stokes theory for steady waves. *Journal of Waterway, Port, Coastal, and Ocean Engineering*, **111**(2), 216-234.
- Det Norske Veritas (2007). Environmental conditions and environmental loads. Recommended Practice DNV-RP-C205.
- Fenton JD (1979). A high-order cnoidal wave theory. *Journal of Fluid Mechanics*, **94**(1), 129-161.
- International Towing Tank Conference (ITTC) (2011). Practical guidelines for ship CFD applications. *26th ITTC*, Rio de Janeiro – Brazil.
- Field PL (2013). *Comparison of RANS and potential flow force computations for the ONR Tumblehome hullform in vertical plane radiation and diffraction problems*. M.Sc. thesis, Virginia Polytechnic Institute and State University, Blacksburg, VA.
- Date JC, Turnock SR (1999). A study into the techniques needed to accurately predict skin friction using RANS solvers with validation against Froude's historical flat plate experimental data. Southampton, UK, University of Southampton. (Ship Science Reports, (114)).
- Choi J, Yoon SB (2009). Numerical simulations using momentum source wave-maker applied to RANS equation model. *Coastal Engineering*, **56**(10), 1043-1060.
- Korteweg DJ, Vries G (1895). On the change of form of long waves advancing in a rectangular canal, and on a new type of long stationary waves. *Philosophical Magazine Series 5*, **39**(240), 422-443.
- Schmitke RT (1978). Ship sway, roll, and yaw motions in oblique seas. *Transactions of the Society of Naval Architects and Marine Engineers*, **86**, 26-46.