

GHGT-9

Impact of Injected CO₂ on Reservoir Mineralogy During CO₂-EOR

M. Nightingale¹, G. Johnson¹, M. Shevalier¹, I. Hutcheon¹, E. Perkins², and B. Mayer¹

⁽¹⁾ Applied Geochemistry Group, Dept. of Geoscience, University of Calgary, Calgary, AB, Canada. ⁽²⁾ Alberta Research Council, Edmonton, AB, Canada.

Abstract

An investigation of the impact of injected CO₂ on reservoir mineralogy was completed as part of the geochemical monitoring and modelling of the Pembina Cardium CO₂ Monitoring Project southwest of Drayton Valley, Alberta, Canada. Oil production at the pilot is primarily from the upper two of three stacked sandstone units of the Cardium Formation in the Pembina field. Core analyzed included samples from each of the three sandstone units, and encompassed three distinct time periods: pre-water flood (1955), pre-CO₂ flood (2005), and post-CO₂ flood (2007). The results of whole rock analysis (XRF, ICP, and XRD), and microscopy (polarizing and electron microprobe) suggest the three separate sandstone units are both texturally and compositionally similar regardless of when the core was recovered. Framework grains are predominately sub-angular to sub-rounded quartz/chert (up to 90.0 wt%), and include smaller amounts of lithic fragments (shale), feldspar (k-feldspar, and albite), mica (muscovite and chlorite), and fluor-apatite. Authigenic pyrite is found as finely disseminated rhombs throughout the formation. Clay minerals present are predominantly kaolinite and illite. Kaolinite appears as fine discrete pore filling books, and is considered to be authigenic. Illite occurs as a major constituent of shale fragments, as well as fine pore bridging strands. The sandstone's irregular pores are cemented to varying degrees by silica and/or carbonate minerals (calcite and siderite). Dissolution features associated with formation diagenesis, including the degradation of detrital grains (quartz and feldspar), the partial and/or complete removal of carbonate cements, and the presence of residual clays, are found in core from each of the three time periods. Attributing dissolution features in post-CO₂ flood core to the interaction of minerals and carbonic acid is difficult due to the geologic history of the formation.

© 2009 Elsevier Ltd. Open access under [CC BY-NC-ND license](https://creativecommons.org/licenses/by-nc-nd/4.0/).


Keywords: CO₂-EOR; Sandstone; Mineral Dissolution; Microprobe; LPNORM

1. Introduction



Primary crude-oil production typically recovers only 15 to 20% of the oil originally in place. The use of secondary recovery methods such as water-flood can increase oil recovery by as much as 20 to 50% in mature oil fields. However, water is not miscible with oil, and the resulting capillary forces that arise from the oil water interfacial tension can trap the remaining oil in the very small converging and diverging channels that are present in the oil-bearing rock. It is the role of tertiary recovery methods to overcome these capillary forces [1].

The interfacial tension can be overcome by “sweeping” an oil-bearing rock with a miscible fluid such as methane or propane, however the widespread use of these hydrocarbons would be cost prohibitive. Under the right set of conditions, carbon dioxide, an inexpensive alternative is capable of displacing trapped oil. Orr and Taber [1] described in detail the mechanisms by which CO₂ displaces oil. Initially, injected CO₂ dissolves into smaller adjacent droplets of oil, which then swell and coalesce, and are subsequently mobilized by an imposed pressure gradient. As CO₂ pressure increases it behaves as a solvent, extracting light hydrocarbons from the oil, and producing a CO₂-hydrocarbon solution that is fully miscible in oil. This miscible solution is then capable of displacing crude oil without interference from capillary forces.

In addition, the injected carbon dioxide will react with any formation water present to produce a weak acid, i.e. carbonic acid (H₂CO₃).



Carbonic acid may then react with reservoir minerals such as carbonates (e.g. calcite, siderite), or silicates (e.g. albite) to produce dissolved ions (Ca²⁺, Fe²⁺, HCO₃⁻ etc.), and secondary minerals such as kaolinite (Al₂Si₂O₅(OH)₄):



Worden and Smith [2] reviewed geochemical data from eight CO₂-flood experiments, including field and laboratory studies, each of which demonstrated an increase in dissolved ions following the initiation of CO₂ injection. They concluded that in the short term the dissolution of carbonates (calcite, dolomite, and siderite) should be expected, and that silicate dissolution may occur but at a much slower rate than carbonate dissolution.

Of particular interest to the current study is the work of Sayegh et al. [3] who reported the results of laboratory CO₂-flood experiments in which carbonated and non-carbonated brines were circulated through core recovered from Cardium sandstone. The concentration of calcium in the circulating brine increased in those cores flooded with CO₂. In addition, the results of XRD and SEM analysis of pre and post-CO₂ flood core indicated that both calcite and siderite cements had been dissolved.

An investigation of the impact of injected CO₂ on reservoir mineralogy was completed as part of the geochemical monitoring and modeling of the Pembina Cardium CO₂ Monitoring Project southwest of Drayton Valley, Alberta, Canada. The access to core recovered before and after the initiation of CO₂ injection at the site provided a unique opportunity to study the impact of CO₂ injection on reservoir mineralogy at the pilot scale.

2. Site Description

The Pembina oilfield of south central Alberta covers approximately 4000 km². The most prolific unit in the field is the Cardium Formation with daily oil production of approximately 10,000 m³ per day. Primary production began in 1953 with the discovery of the Socony Seaboard Pembina No.1 well located at 100/04-16-048-08W5; water flooding in the field was initiated in late 1950's. Total production from both primary and secondary methods is near the maximum recoverable for the pool (approximately 1.4 billion barrels), and tertiary recovery by CO₂ flood is now being evaluated.

The Pembina Cardium CO₂ Monitoring Project is located approximately fifteen kilometres south west of Drayton Valley, Alberta, and is centred on Penn West's battery located at 09-11-048-09W5 (Fig 1).

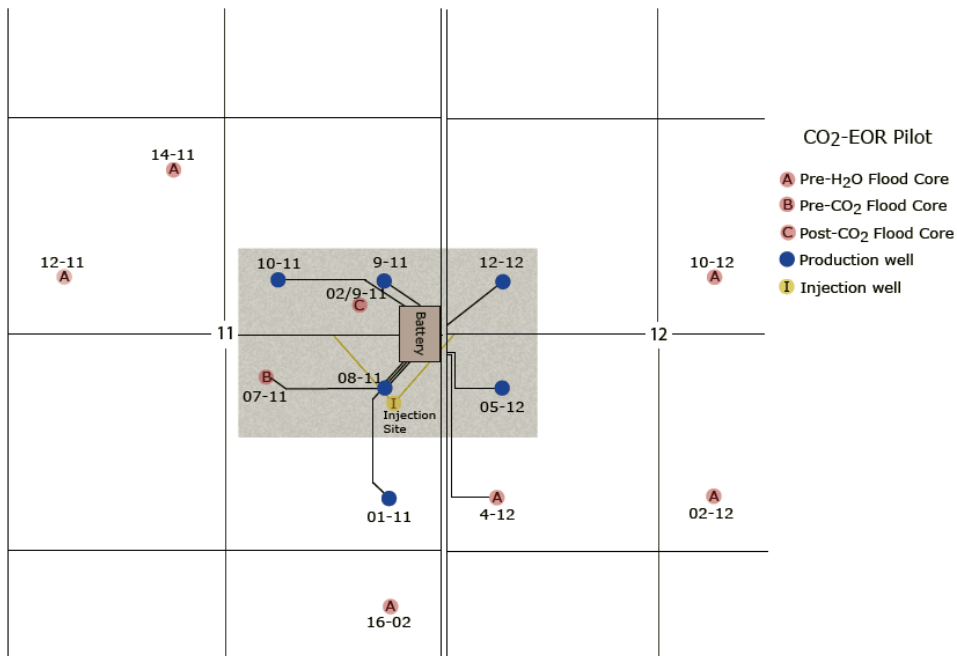


Figure 1: The Pembina Cardium CO₂ Monitoring Project located at 09-11-048-09W5.

The pilot consists of two, five-spot injection patterns; i.e. central injection well with four producers. Two of the producing wells (08-11-048-09W5 and 09-11-048-09W5) are shared by each pattern, resulting in two injection wells and six producers in the pilot. Oil production at the site is primarily from the upper two of three stacked sandstone units of the Pembina Cardium Formation [4]. Carbon dioxide injection at the site was initiated in March of 2005 at a rate of approximately 50m³ per day.

3. Samples

Samples for analysis were collected from archived and fresh core recovered at three distinct time periods: pre-water flood (1955), pre-CO₂ flood (2005), and post-CO₂ flood (2007). Pre-water flood samples were collected from each of the three sandstone units from wells located at 16-2-048-09W5, 12-11-048-09W5, 14-11-048-09W5, 2-12-048-09W5, and 4-12-048-09W5, and 10-12-048-09W5, pre-CO₂ flood samples were collected from the well located at 02/07-11-048-09W5, and post-CO₂ flood samples were collected from the well located at 02/09-11-048-09W5.

4. Methods

Samples collected were subdivided at the University of Calgary, i.e. approximately one third of the sample was archived, one-third was used for thin-section preparation, and one third was ground for whole rock geochemistry.

Thin-sections, including: one small format (1" x 2") for standard petrography, and one large format (2" x 3") for electron micro-probe analysis, were prepared by Calgary Rock and Material Services (Calgary, Alberta). Thin-

sections analysis was completed at the University of Calgary using a Nikon Optiphot polarizing microscope, and a Jeol JXA-8200 electron microprobe in both energy dispersion (EDS) and wavelength dispersion (WDS) modes.

Whole rock geochemistry, including: X-Ray Fluorescence (XRF), Inductively Coupled Plasma - Atomic Emission Spectrometry (ICP-AES), X-Ray Diffraction (XRD), total carbonate, and total sulfide analysis, was completed by SGS Laboratories (Lakefield, Ontario).

Linear programming normative analysis (LPNORM, [5]) was completed at the University of Calgary in consultation with Dr. John Bloch of the University of New Mexico, Albuquerque.

5. Results and Discussion

Changes in produced water chemistry following the initiation of CO₂ injection at the site suggest that dissolution of formation minerals in particular carbonates, is occurring [6]. For those wells where CO₂ “breakthrough” has occurred there has been a concomitant increase in dissolved inorganic ions [6]. For example, the results of produced water analysis for the well at 09-11-048-09W5 show a significant increase in Ca²⁺ and Sr²⁺ concentrations above baseline levels (Fig. 2), most likely the result of calcite cement dissolution.

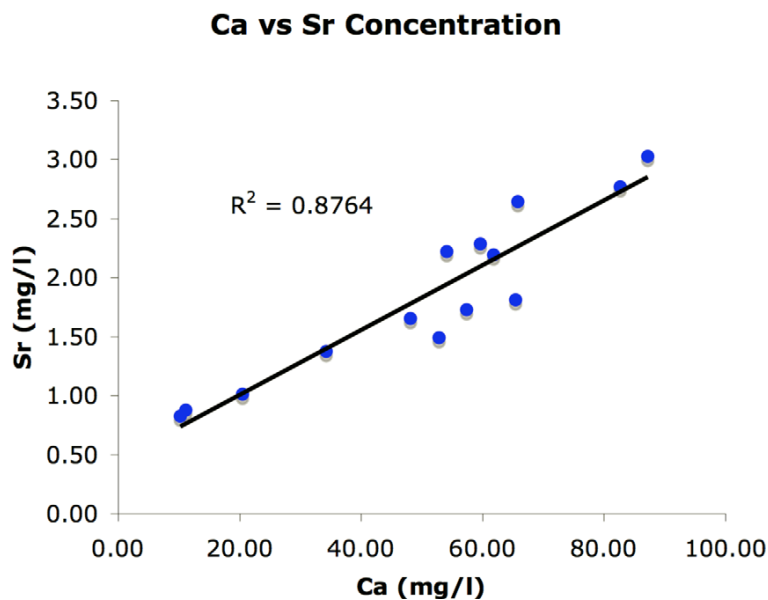


Figure 2: Changes in produced water chemistry (09-11-048-09W5) following 18 months of CO₂ injection.

In spite of the observed changes in formation water chemistry the results of quantitative mineralogy suggest that samples recovered from each of the three time periods were compositionally similar (Table 1).

Table 1: Mean and Standard Deviation (brackets) of Mineral Composition (wt%) of recovered core.

	Pre-H ₂ O	Pre-CO ₂	Post-CO ₂
Quartz	86.5 (1.2)	85.5 (2.1)	89.0 (2.5)
K-spar	0.9 (0.4)	1.5 (0.6)	0.6 (0.6)
Albite	0.7 (0.8)	1.6 (1.1)	2.0 (0.5)
Mus/Ill	3.9 (1.1)	2.6 (1.8)	2.8 (0.8)
Chlorite	0.9 (0.3)	0.9 (0.7)	0.3 (0.3)
Kaolinite	2.2 (0.4)	2.8 (0.7)	2.2 (0.5)
Calcite	0.1 (0.2)	0.1 (0.1)	0.4 (0.6)
Siderite	0.8 (0.9)	1.1 (1.1)	0.5 (0.6)
Pyrite	0.4 (0.5)	0.6 (0.7)	0.3 (0.3)

The sandstone samples analyzed are composed primarily of quartz (up to 90%), with smaller amounts of feldspar (k-feldspar, and albite), muscovite, chlorite, pyrite, and clay (illite and kaolinite) present. Carbonate minerals present include both calcite and siderite.

Since carbonate mineral dissolution occurs more rapidly than silicate mineral dissolution [2], the initial changes in formation water chemistry should reflect the composition of carbonates present. The carbonates were examined in more detail by electron microprobe and the average composition of calcite is presented in Table 2.

Table 2: Average Oxide Composition (wt%) of Carbonate Cements

Oxide	Calcite
CaO	54.3
MgO	0.3
FeO	1.3
SrO	1.6
CO ₂	42.3

As expected, the calcite was composed predominantly of calcium carbonate with smaller amounts of strontium, iron and magnesium present. The dissolution of calcite of this composition would account for the near linear increase in both calcium and strontium described in Figure 2.

The lack of any significant mineralogical differences between pre and post-CO₂ core may have more to do with the limitations of sampling than the absence of any water/rock interaction at the site. The well from which the post-CO₂ core was recovered may have been too far from the injector to have been affected. Worden and Smith [2] concluded that dissolution reactions would be more pronounced near the site of CO₂ injection, where the decrease in pH would be the greatest. In addition, the degree to which the three sandstone units are cemented varies considerably with depth. For the current study, samples for both pre and post-CO₂ core analysis were chosen from sections of core most likely to be, or to have been, swept by CO₂ rich fluids, i.e. exhibited significant porosity/permeability and a

minimum amount of cementation. A more complete analysis of the variability of cementation at the site is needed to determine the vertical extent of carbonate cement removal.

In addition to being compositionally similar, an analysis of the images generated by the electron microprobe (BSE) suggests that the sandstone units are “texturally” similar as well (Figures 3 and 4). Framework grains are predominately sub-angular to sub-rounded quartz and chert, and include smaller amounts of lithic fragments (shale), feldspar (k-feldspar, and albite), mica (muscovite and chlorite), and fluor-apatite. Authigenic pyrite is found as finely disseminated rhombs throughout the formation. Kaolinite appears as fine discrete pore filling books, and is considered to be authigenic. Illite occurs as a major constituent of shale fragments, as well as fine pore bridging strands. Irregular pores are cemented to varying degrees by silica and/or carbonate minerals (calcite and siderite).

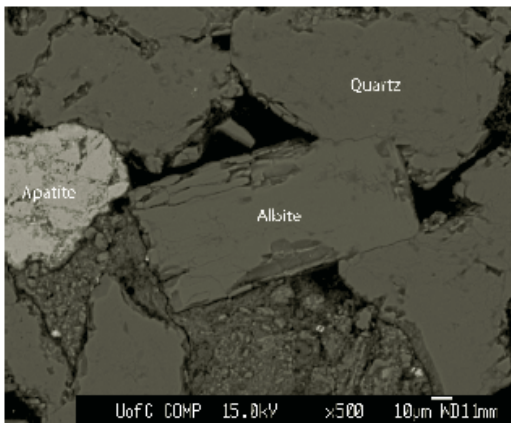


Fig 3a

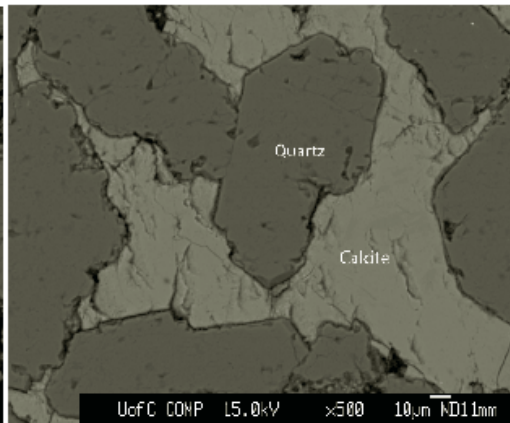


Fig 3b

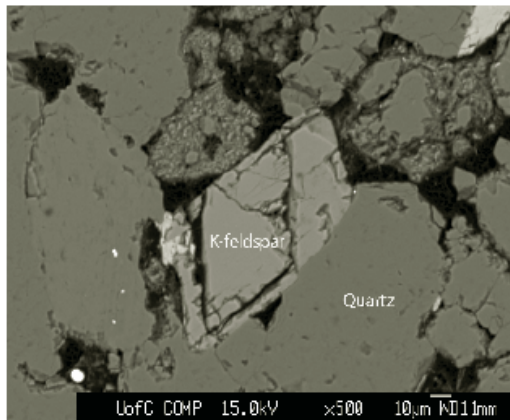


Fig 3c

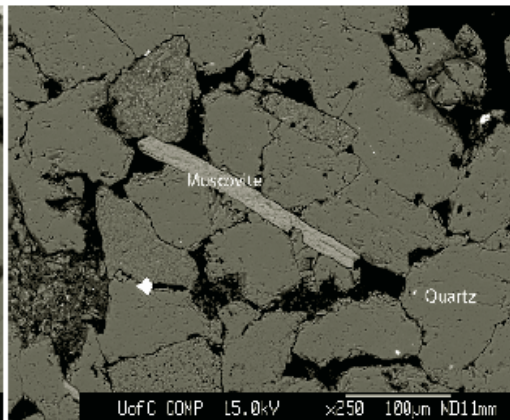


Fig 3d

Figure 3. Photomicrographs of Sandstone (BSE). Figures 3a and b Pre-H₂O Flood (14-11-048-09W5); Figures 3c Pre-H₂O Flood (12-11-048-09W5); and Figure 3d Post-CO₂ Flood (02/09-11-048-09W5).

Dissolution features, including the degradation of detrital grains (quartz and feldspar), the partial and/or complete removal of carbonate cements, and the presence of residual clays, are found in samples from each of the three time periods (Fig. 4). The dissolution of quartz and feldspar (albite and k-feldspar) may have initiated much earlier in the formation's diagenetic history, possibly during an episode of carbonate cementation [7]. The subsequent removal or partial removal of carbonate cements appears to predate both water-flood and CO₂ injection at the site and may be related to the “charging” of the Cardium with meteoric water, again much earlier in its diagenetic history. Machemer and Hutcheon [8] suggested at least two separate dissolution events occurred during formation diagenesis, one prior to and one subsequent to carbonate precipitation.

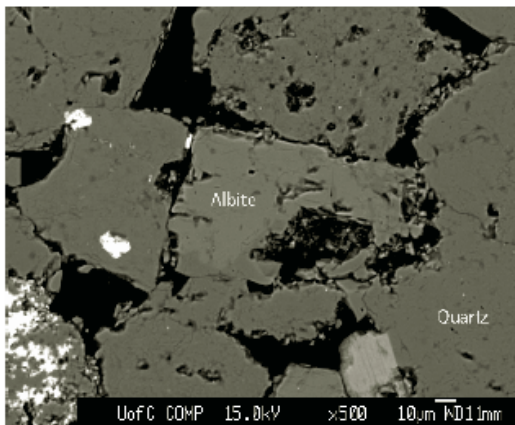


Fig 4a

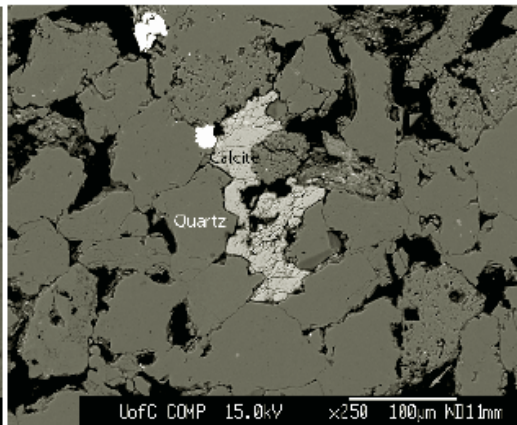


Fig 4b

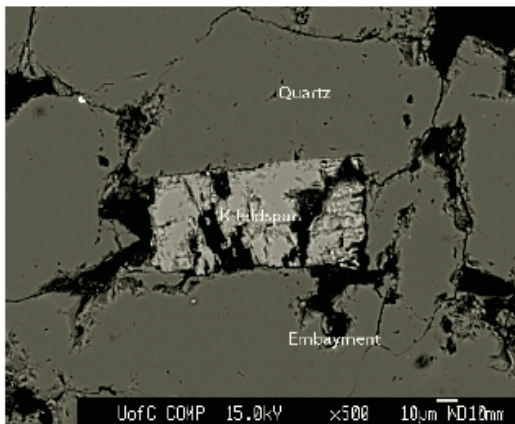


Fig 4c

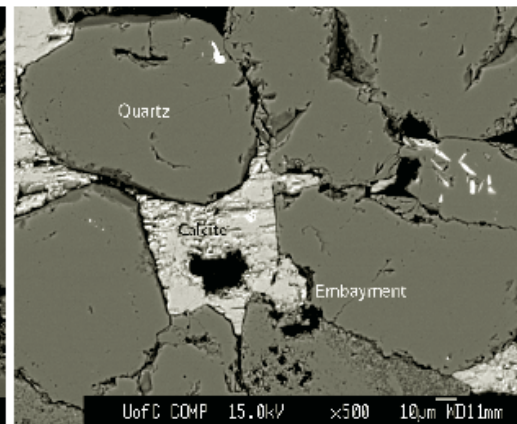


Fig 4d

Figure 4. Photomicrographs of Cardium Sandstone (BSE) showing dissolution of feldspars and calcite. Figures 4a Pre-H₂O Flood (14-11-048-09W5); Figure 4b Pre-CO₂ Flood (02/07-11-048-09W5); Figures 4c and d Post-CO₂ Flood (02/09-11-048-09W5).

Mineral trapping (i.e. the interaction of carbonic acid, dissolved ions, basic aluminosilicate minerals, and the precipitation of new solid mineral phases that incorporate carbonate in their structure) has been described as a possible means of sequestering anthropogenic CO₂ in saline aquifers and mature oil fields, although these types of reactions could take 100s of years to complete [9]. In the current study, no new carbonate mineral phases were found in samples from the post-CO₂ flood core.

6. Conclusions

Changes in formation water chemistry following the initiation of CO₂ injection suggests mineral dissolution by carbonic acid is occurring at the site. The absence of a significant difference in quantitative mineralogy between pre and post-CO₂ samples may be more indicative of the difficulty of obtaining a representative sample set and/or sample location, than of a lack of water/rock interaction. Attributing dissolution features in the post-CO₂ flood core to the interaction of minerals and carbonic acid appears to be complicated by the Cardium geologic history.

7. Acknowledgements

Funding for the Pembina Cardium CO₂ Monitoring Project was received from Pen West Energy Trust, Alberta Energy Research Institute, Western Economic Diversification Canada, Natural Resources Canada, and the Alberta Government.

8. References

1. Orr F. M., and Taber J. J. Use of Carbon Dioxide in Enhanced Oil Recovery. *Science* 11 May 1984: Vol. 224. no. 4649, pp. 563 – 569
2. Worden R.H., and Smith L. K. Geological sequestration of CO₂ in the subsurface: lessons from CO₂ injection enhanced oil recovery projects in oilfields. In *Geological Storage of Carbon Dioxide*. Baines, S. J. and Worden, R. H. (eds) 2004. Geological Society of London.
3. Sayegh S.G., Krause, F.F., Girard, M. and DeBree, C., 1990. Rock/fluid interactions of carbonated brines in a sandstone reservoir: Pembina Cardium, Alberta, Canada. *SPE Formation Eval.* 5, pp. 399–405.
4. Dashtgard, S., Buschkuehle, M., Berhane, M., and Fairgrieve, B. Local-Scale Baseline Geological Report for the Pembina-Cardium CO₂-Enhanced Oil Recovery Site, Alberta Geological Survey, November 2006.
5. de Caritat, P., Bloch, J., and Hutcheon, I., 1994. LPNORM: A linear programming normative analysis code; *Computers and Geosciences*, v. 20, p. 313-347.
6. Shevalier, M., Nightingale, M., Johnson, G., Mayer, B., Perkins, E. and Hutcheon I. Monitoring the reservoir geochemistry of the Penn West CO₂-enhanced oil recovery Pilot Site, Drayton Valley, Alberta. GHGT 9, Washington DC (this volume).
7. Burley S. D. and Kantorowicz J. D. 1986. Thin-section and S.E.M. textural criteria for the recognition of cement-dissolution porosity in sandstones. *Sedimentology* 33, 587-604.
8. Machemer S., and Hutcheon I. Geochemistry of early carbonate cements in the Cardium Formation, central Alberta. *Journal of Sedimentary Research*; January 1988; v. 58; no. 1; p. 136-147.
9. Perkins E. H., and Gunter W. D. (1995a) Aquifer disposal of CO₂-rich greenhouse gases: modelling of water-rock reaction paths in a siliciclastic aquifer. In: Kharaka YK, Chudaeov OV (eds) VIII International Symposium on Water-Rock Interaction. Balkema, Rotterdam, pp 895–898.