



# A critical review of the current progress of plastic waste recycling technology in structural materials

Ehsan Naderi Kalali<sup>1,2</sup>, Saeid Lotfian<sup>3</sup>,  
Marjan Entezar Shabestari<sup>4</sup>, Saber Khayatzadeh<sup>5</sup>,  
Chengshou Zhao<sup>1</sup> and Hamed Yazdani Nezhad<sup>6</sup>

## Abstract

One of the main environmentally threatening factors is plastic waste which generates in great quantity and causes severe damage to both inhabitants and the environment. Commonly, plastic waste generated on the land ends up in water bodies, resulting in detrimental solid impacts on the aquatics via poisoning and flooding the marine ecosystem. Exploring various approaches to convert plastic wastes into new products known as an efficient way to manage them and to enhance the sustainability of the environment, discussed in this article. Moreover, the limitation of the application of plastic waste for construction purposes is also considered. It is wind up that the usage of plastic waste for construction purposes will significantly rectify the sustainability of our environment and also be regarded as a trustworthy source of materials for applying in conventional materials such as concrete and asphalt.

## Addresses

<sup>1</sup> Department of Fire Safety Engineering, Faculty of Geoscience and Environmental Engineering, Southwest Jiaotong University, Chengdu, China

<sup>2</sup> Institute of Macromolecular Chemistry, CAS, Heyrovského nám. 2, 162 06 Prague 6, Czech Republic

<sup>3</sup> Department of Naval Architecture, Ocean and Marine Engineering, University of Strathclyde, Glasgow G4 0LZ, UK

<sup>4</sup> College of Chemistry and Environmental Engineering, Sichuan University of Science and Engineering, Zigong, Sichuan, China

<sup>5</sup> Department of Design and Mathematics, University of the West of England, Bristol BS16 1QY, UK

<sup>6</sup> Advanced Composites Research Focused Group, Department of Engineering, School of Science and Technology, City, University of London, London EC1V 0HB, UK

Corresponding author: Lotfian, Saeid ([saeid.lotfian@strath.ac.uk](mailto:saeid.lotfian@strath.ac.uk))

Current Opinion in Green and Sustainable Chemistry 2023, 40:100763

This review comes from a themed issue on **Recycling and Reuse within a Circular Economy** (2023)

Edited by **Vijay Kumar Thakur, Stefan Ioan Voicu**

<https://doi.org/10.1016/j.cogsc.2023.100763>

2452-2236/© 2023 The Authors. Published by Elsevier B.V. This is an open access article under the CC BY license (<http://creativecommons.org/licenses/by/4.0/>).

## Keywords


Construction materials, Recycling, Plastic waste, Sustainability, Environment.

## Introduction

Due to the wide range of household and industry applications, polymeric materials have become an impalpable component of our current lives [1]. Worldwide plastic production is estimated to be around 1.1 billion tons by 2050 [2]. Environmental Protection Agency reported that out of tons of plastic waste generated, only 7% is recycled annually. The records demonstrated that only 8% of the plastic is incinerated, and the remaining is landfilled. However, the high energy and cost of landfilling process lead to these wastes being released into water bodies [3,4]. Thermoset, thermoplastic, and elastomer plastic wastes are not easily degraded and could cause primary environmental contamination [5,6]. Therefore, proper plastic waste management is the key to solving environmental and sustainability issues. The traditional model uses resources based on the “take-make-consume-waste” strategy. It is essential to switch from the linear model to a generative and restorative model based on the circular economy idea. Standard waste management techniques for plastic materials include thermal breakdown, landfills, mechanical pulverisation, incineration, recycling, and microbiological decomposition (Figure 1). The main remaining challenge in managing the waste plastic industry is the rapid and efficient identification and sorting of waste plastic mixtures [7].

Hence, plastic waste is generally tossed out in landfills and disposed of into the environment. Meanwhile, energy recycling of plastic waste is commonly employed by incineration, in which a significant amount of energy can be regenerated and used in different fields [8]. Among all those methods, recycling plastic waste can simultaneously provide an environmentally friendly and acceptable approach. Plastic waste recycling deals with the waste management process, which stacks up plastic waste materials, convert them to raw materials and employs them to produce other products. Disposing of plastic waste is the main advantage of recycling. Moreover, it also helps to minimise the demand for raw

Figure 1

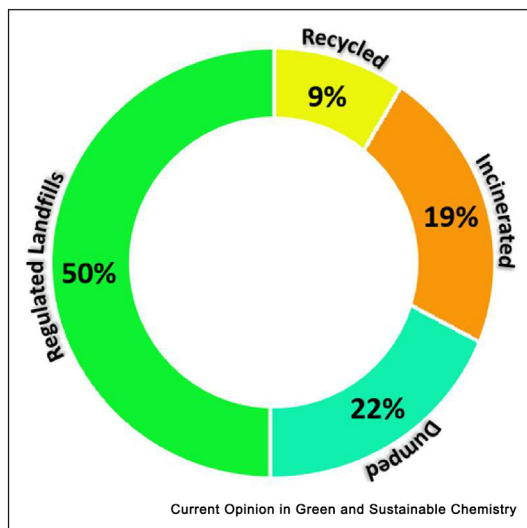

Global share of waste treatment and disposal according to the method.

polymeric materials that can help to reduce global warming [4,5,8]. The plastic recycling process can be classified into primary, secondary, tertiary, and quaternary stages, according to the ASTM Standard D5033 [9]. Based on the mechanism of each process, plastic waste recycling can be categorised as chemical, mechanical, and biological recycling [6,10]. During catalytic and thermal processes in chemical recycling, plastic waste can be converted into value-added fuels/chemicals. Such a process is the primary method to decrease plastic waste, which is a significant source of environmental concern. Separation of the different materials is known as the other required process in the recycling of plastic waste. Density separation (densities-based), optical sorting (colours and peaks-based), Tribo electrostatic separation (effective surface work function-based), and flotation (surface properties based) are various separation techniques known in the field of plastic waste recycling [11]. One of the most powerful methods to eliminate the accumulation of contaminants in the environment induced by plastic waste is knowing the most desirable separation methods and recycling plastic waste. This review aims to discuss the latest state-of-the-art technology of chemical and mechanical plastic waste recycling techniques to decrease plastic waste accumulation in the environment. It is worth noting that the chemical recycling of plastic wastes is contingent on the polymer chains' degradation [3–5,10].

A variety of plastic wastes exist; polyethylene and polyethylene terephthalate (PET) is known as the most common ones. Scientists have found the recycling of plastic waste as a compelling path, and different

recycling methods have been extensively proposed for such waste by the packaging industry. However, their use in the construction industry is not widespread. In fact, the construction industry is an important and favourable sector where plastic wastes add value and can be used for different applications, as it is the most significant industrial sector in various financial systems and the largest consumer of raw materials. Civil construction material can be obtained from plastic wastes in the form of bulk in asphalt and cementitious mixtures, insulation, filler, etc. Despite the great potential of plastic waste application in the construction sector, its usage and development are still quite limited [12–14]. Two critical economic drivers influence the viability of thermo-plastic recycling. These are the price of the recycled polymer compared with virgin polymer and the cost of recycling compared with alternative forms of acceptable disposal. Additional issues are associated with variations in the quantity and quality of supply compared with virgin plastics. A lack of information about recycled plastics' availability, quality, and suitability for specific applications can also act as a disincentive to using recycled material [14]. This article reviews recent advances in plastic waste recycling methods and materials. Furthermore, polymeric waste materials in popular constructions, such as asphalt pavements and cementitious concrete, have been studied. Moreover, the use of waste materials to improve the performance of concrete and asphalt is also reviewed.

### Recycling plastic wastes

Plastic materials are less recycled compared to other materials consumed in large quantities, such as glass, paper, ceramics, and aluminium [15,16]. Total plastic recycling is known as a complex technique due to its multistage processing, disposal and sorting, distribution, and use [17,18]. Plastic wastes can be recycled chemically, mechanically, or thermally (Table 1). In the initial stage, they need to be sorted, which is generally performed automatically by employing different technologies such as fluorescence, electrostatics, infrared, flotation, and spectroscopy. The physical degradation of plastic waste evolves through different processes, such as shredding and/or grinding, which are the main stages of mechanical recycling [19].

However, compared to the incineration process, mechanical recycling is described as inefficient due to its plastic waste mixtures' complexity; hence, most plastic wastes are incinerated [24,25]. But, based on the literature, the mechanical recycling technique is the most used plastic recycling technique due to its rapid process and efficiency. For the chemical recycling of plastic wastes, the polymer chains can be broken down and converted to their initial monomers that can be used instead of virgin raw materials in developing raw plastic materials.

Table 1

## The advantages and limitations of different plastic waste recycling methods.

Methods	Advantages	Limitations	Ref.
Mechanical	<ul style="list-style-type: none"> <li>It is the most straightforward process for recycling metal matrix composites, and it is especially well-suited for fibre-reinforced polymers (FRP), where fibre breaking is accomplished through shredding.</li> <li>The recycling facilities are simple and economical, using less energy and resources than chemical or physical recycling processes.</li> </ul>	<ul style="list-style-type: none"> <li>The generation of cyclic and linear oligomers affects the printability and dyeability of the final product.</li> <li>The decreased melt viscosity is due to hydrolytic and thermal depolymerisation.</li> </ul>	[20,21]
Chemical	<ul style="list-style-type: none"> <li>The greater rates of the monomer with a shorter reaction time.</li> <li>Higher potential for profitability through new materials application.</li> <li>The most cost-effective approaches for high-performance recycling composites.</li> </ul>	<ul style="list-style-type: none"> <li>The expensive investment in developing technical infrastructure/processes.</li> <li>The feasibility of an industrial scale has not yet been completely established.</li> <li>High temperatures and much energy are needed.</li> </ul>	[22,23]

Thermal recycling of waste plastic materials includes melting the plastic wastes by elevating their temperatures and then casting or injecting the molten into a mould to form products. Faraca and Astrup investigated the recycling capabilities of different plastic products such as polypropylene (PP), polyvinyl chloride (PVC), high-density polyethylene (HDPE), polyethylene terephthalate (PET), and polystyrene (PS) [26]. They reported that the intrinsic properties of plastics could affect their recycling potential. It is worth noting that recycled plastics indicated according to their commercial codes as; 1, 2, 3, 4, 5, 6, and 7, which means PET, HDPE, PVC, LDPE, PP, PS, and others, respectively. Figure 2 demonstrates the potential for sorting, reprocessing and recycling common plastics via mechanical or chemical methods. According to the studies, the sorting and reprocessing ability of the plastic materials mentioned in this category is more than 50%. Among them, PET exhibits low recyclability. Moreover, it is reported that recycling polyethylene and polypropylene will show greater value in energy consumption and their management systems.

### Types of plastics and possible construction applications


One of the main backbones of every nation is the construction industry, which greatly contributes to its economy. Therefore, employing waste materials will significantly improve the sustainability of construction practices and processes. The major goal of the circular economy model is to maintain products and their constituent parts at their best levels of efficiency and value for the entirety of their intended lifecycles. Considerable reduction of waste plastic materials disposal in the marine environment will be achieved by employing the innovative sustainable use of plastic waste for construction applications. Therefore, alternative materials can be proposed to meet the great demand of the construction industry. However, durability and mechanical properties must comply with the intended application

to use polymer wastes for construction purposes. Figure 3 represents the overview of using untreated polymer wastes in construction materials.

Moreover, such materials must be sustainable and cost-effective to be substituted over other types of materials. For example, some recycled non-biodegradable waste plastic bags have been used to produce wall and floor tiles with enhanced mechanical properties and lower flammability [28]. This study demonstrated that plastic bags, which are known as the primary contributor to water and soil pollution, can be converted into highly durable and lightweight products. Hama and Hilal [29] reported the properties of self-consolidating concrete (SCC) developed by incorporating fine aggregates of plastic wastes [19]. This research demonstrated that loading 12.5 W% of plastic aggregates to SCC enhanced its fresh properties, such as filling and passing ability. There is a variety of plastic wastes (Figure 4) which are generated according to their initial application, such as polypropylene (PP), polyethylene terephthalate (PET), polystyrene (PS), low-density polyethylene (LDPE), High-density polyethylene (HDPE), etc. Recent investigations show that most plastic wastes are composed of LDPE. However, PP and HDPE also showed a significant amount of similarity to that HDPE.


Khalid *et al.* investigated the performance of plastic wastes in fibre-reinforced concrete beams [20,31]. In their research, ring-shaped PET (Figure 5) was loaded into the concrete in order to improve its fracture energy, compressive strength, beam flexural strength, and splitting tensile. It also illustrated that the plastic fibres added to the concrete improved the mechanical behaviour of the beams concerning the first crack strength and load and showed almost no effect on the failure mode. Plastic wastes can be employed for indoor use and general engineering aside from the application for construction purposes. The use of PW as a replacement for aggregate in base and subbase construction for

Figure 2

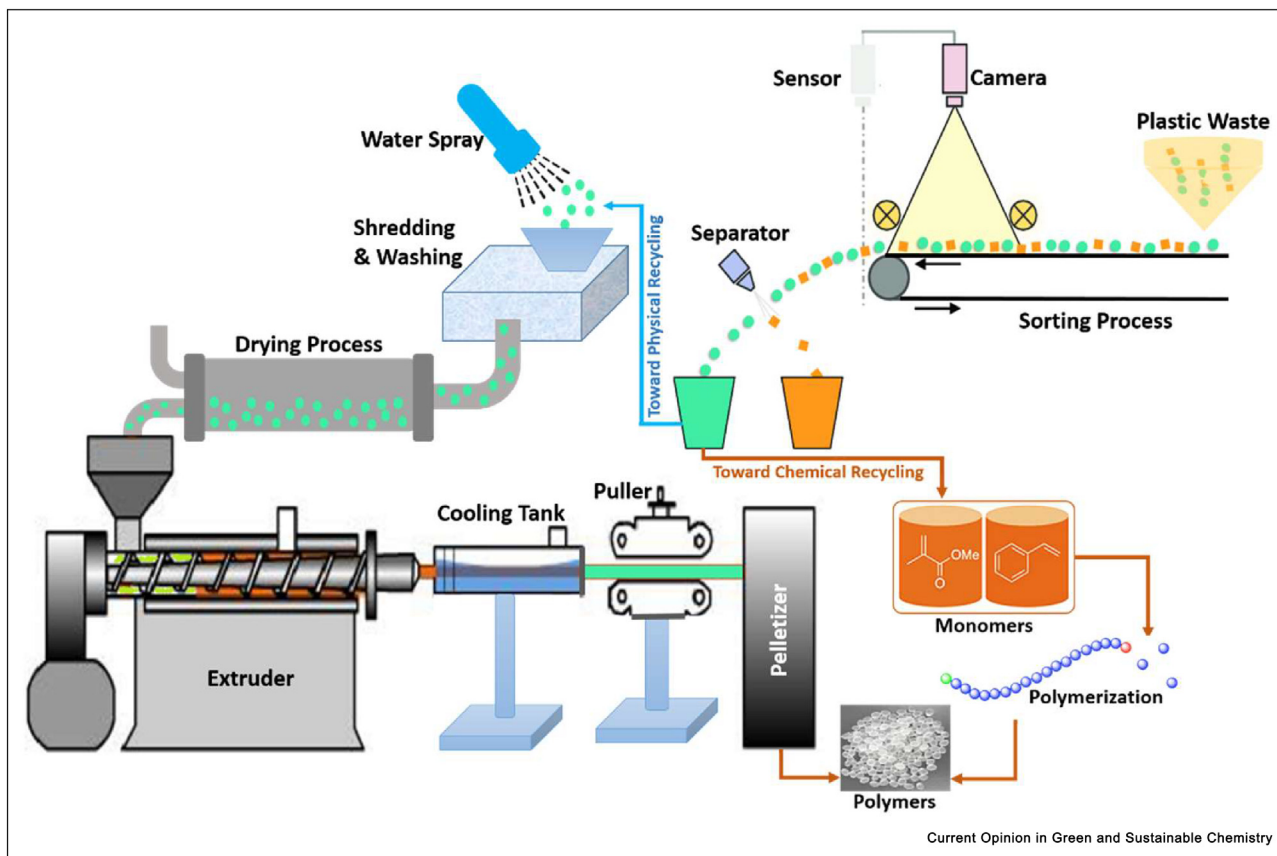

Schematic illustration of plastic waste recycling via mechanical and chemical methods.

Figure 3

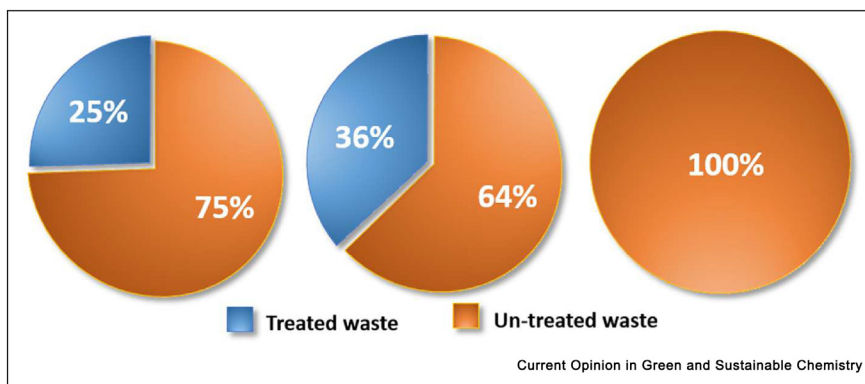


Overview of applying treated waste polymers in construction materials [27].

pavements has improved the pavement’s shear, stiffness and bearing capacity [32]. Their study showed that incorporating PW lowers the stiffness, bearing capacity and resilient modulus of the blends; however, acceptable performance was still achieved. Plastic wastes can

also be loaded into asphalt mixtures, similar to the utilisation of plastic waste for cementitious composites as an aggregate [33]. Based on the record, the amount of asphalt produced globally during each year for asphalt pavements in the form of a binder, waterproofing

Figure 4

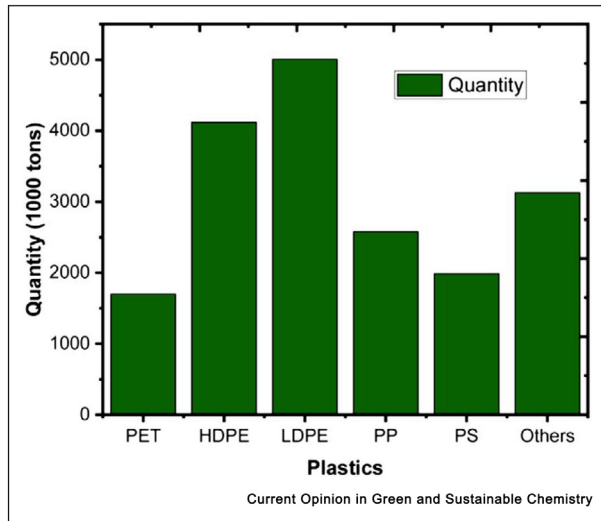

Different types of plastic wastes and their estimated quantities [30].

materials, or roofing or sealing has been estimated at 1.7 trillion metric tons [34,35]. Generally, asphalt pavement comprises 4 to 8 per cent of bitumen and aggregates, which are the most conventional material for paving roads due to their high durability and load-bearing properties. Modification with polymers is a common way to improve asphalt pavement performance. Recently, polymeric waste materials such as waste plastics and rubber have been evaluated as alternative polymeric materials for strengthening the performance of asphalt pavement. There are two different methods to load waste plastics or rubber into asphalt, which are known as; the wet process and the dry process. In the former process, the waste materials act as a modifier which are loaded into bitumen and mixed, resulting in preparation of a polymer-modified bitumen. In the later

process, the plastic wastes act as aggregate or filler through the asphalt mixture, and the raw aggregate and filler can be substituted by these wastes [13,36].

The incorporation of plastic wastes in asphalt resulted in an enhancement in the crack and skid resistance of the pavement. Using plastic wastes as modifiers in the asphalt mixtures significantly improves stiffness and rutting resistance performance. Such increment in the performance of the plastic waste-modified asphalt might be attributed to the more excellent resistance of the matrix caused by the incorporation of the plastic waste. Moreover, a significant reduction in traffic noise was observed in the case of plastic waste incorporated asphalt. It is also reported that plastic wastes can be employed as a potential replacement for wood, blocks and bricks by using moulding processing [37].

#### Limitations to the application of plastic wastes

Some limitations in the use of plastic waste have been reported that inhibit its large-scale use, which can be summarised as.

- Varying composition: plastic wastes are made up of a variety of types and grades, which might be resulted in a non-isotropic performance while operating for construction purposes;
- Harvesting: This is known as the major limitation of plastic waste before the recycling process;
- Low density: This can result in some limitations where a higher modulus of elasticity and toughness is required;
- Lack of understanding: limited understanding of the long-term performance of recycled plastics caused a limitation in the acceptance and the usage of the plastic wastes (PW) by the contractors;
- Low surface energy: this leads to poor mechanical bonding while incorporating into the composites and significantly reduces the overall mechanical properties of the resulting composite;

Figure 5



Current Opinion in Green and Sustainable Chemistry

Ring-shaped plastic fibres used for improved concrete beam performance [31].

- f) Economic constraints: recycling some types of plastic requires costly advanced equipment that inhibits the recyclability of these types of plastic wastes;
- g) Lack of standards: despite extensive investigations into the usage of plastic waste in cementitious composites, there is still no standard for applying plastic waste for construction purposes.

### Summary and outlook

Plastics play an essential role in our daily lives, and the generation of plastic waste at the end of its use is unavoidable. Therefore, their employment in construction is a viable option that helps the proper management of plastic waste while rectifying the sustainability of the environment. This article has studied the current investigations that have been conducted on employing recycled plastic waste for construction purposes. The following conclusions can be summarised.

- Using plastic waste for construction can solve waste management problems and minimise using raw materials for construction purposes while supporting the sustainability of the circular economy.
- Using plastic waste for construction purposes leads to using these wastes for long-term applications compared to the short-term use in new products, which will result in the generation of new plastic waste.
- Plastic wastes can be used as an aggregate, binder, and fibre, making it a suitable replacement instead of all the components used in cementitious composites while providing the acceptable overall performance of the final composite.

### Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

### Data availability

Data will be made available on request.

### Acknowledgement

The authors would like to acknowledge financial support from the Southwest Jiaotong University research startup grant number YH1100312372219 and the grants received from UK Engineering & Physical Sciences Research Council (EPSRC), EP/R016828/1 (Self-tuning Fibre-Reinforced Polymer Adaptive Nanocomposite, STRAINcomp), EP/R513027/1 (Study of Microstructure of Dielectric Polymer Nanocomposites subjected to Electromagnetic Field for Development of Self-toughening Lightweight Composites), and EP/V040553/1 (Bionic Adaptive Stretchable Materials for Wave Energy Converter (BASM-WEC)).

### References

Papers of particular interest, published within the period of review, have been highlighted as:

- \* of special interest
- \*\* of outstanding interest

1. Evode N, Qamar SA, Bilal M, Barceló D, Iqbal HM: **Plastic waste and its management strategies for environmental sustainability**. *Case Studies in Chemical and Environmental Engineering* 2021, **4**, 100142.  
\*  
The authors successfully discussed and illustrated some methods that can be applied to treat plastic waste so that plastic life can be cyclic.
2. Lai Y-Y, Lee Y-M: **Management strategy of plastic wastes in Taiwan**. *Sustainable Environment Research* 2022, **32**:1–10.
3. Yuan Z, Nag R, Cummins E: **Human health concerns regarding microplastics in the aquatic environment - from marine to food systems**. *Sci Total Environ* 2022, **823**, 153730.  
\*\*  
The authors did a systematic review and considerable work to develop the area of risk assessment of microplastics in marine ecosystems.
4. Emenike P, Araoye O, Academe S, Unokiwedi P, Omole D: **The effects of microplastics in oceans and marine environment on public health—a mini-review**. In *IOP conference series: earth and environmental science*. IOP Publishing; 2022, 012019.
5. Chen Y, Selvinsimpson S: **Current trends, challenges, and opportunities for plastic recycling**. *Plastic and Microplastic in the Environment: Management and Health Risks* 2022:205–221.
6. Prajapati R, Kohli K, Maity S, Sharma B: **Recovery and recycling of polymeric and plastic materials**. 2021:15–41.
7. Pan D, Su F, Liu C, Guo Z: **Research progress for plastic waste management and manufacture of value-added products**. *Advanced Composites and Hybrid Materials* 2020, **3**:443–461.
8. Astrup T, Møller J, Fruergaard T: **Incineration and co-combustion of waste: accounting of greenhouse gases and global warming contributions**. *Waste Manag Res* 2009, **27**: 789–799.
9. Standard A: *D5033, Standard guide to development of ASTM standards relating to recycling and use of recycled plastics*. West Conshohocken, PA: ASTM International; 2000.
10. Siwal SS, Kaur H, Deng R, Zhang Q: **A review on electro-chemical techniques for metal recovery from waste resources**. *Current Opinion in Green and Sustainable Chemistry* 2023, **39**, 100722.
11. Wu G, Li J, Xu Z: **Triboelectrostatic separation for granular plastic waste recycling: a review**. *Waste Manag* 2013, **33**: 585–597.
12. Damayanti D, Saputri DR, Marpaung DSS, Yusupandi F, Sanjaya A, Simbolon YM, Asmarani W, Ulfa M, Wu H-S: **Current Prospects for plastic waste treatment**. *Polymers* 2022, **14**: 3133.
13. Soni A, Das PK, Hashmi AW, Yusuf M, Kamyab H, Chelliapan S: **Challenges and opportunities of utilizing municipal solid waste as alternative building materials for sustainable development goals: a review**. *Sustainable Chemistry and Pharmacy* 2022, **27**, 100706.
14. Ahmad J, Majdi A, Babeker Elhag A, Deifalla AF, Soomro M, Isleem HF, Qaidi S: **A step towards sustainable concrete with substitution of plastic waste in concrete: overview on mechanical, durability and microstructure analysis**. *Crystals* 2022, **12**:944.
15. Awoyera PO, Ndambuki JM, Akinmusuru JO, Omole DO: **Characterization of ceramic waste aggregate concrete**. *HBRC Journal* 2018, **14**:282–287.
16. Awoyera PO, Adesina A: **Plastic wastes to construction products: Status, limitations and future perspective**. *Case Stud Constr Mater* 2020, **12**, e00330.  
\*  
The authors' research covered various recycling techniques for plastic waste in construction applications. They also study some limitations of the application of plastic waste.

17. Hahladakis JN, Iacovidou E: **An overview of the challenges and trade-offs in closing the loop of post-consumer plastic waste (PCPW): Focus on recycling.** *J Hazard Mater* 2019, **380**, 120887.
18. Singh N, Hui D, Singh R, Ahuja I, Feo L, Fraternali F: **Recycling of plastic solid waste: a state of art review and future applications.** *Compos B Eng* 2017, **115**:409–422.
19. Serranti S, Bonifazi G: **Techniques for separation of plastic wastes.** In *Use of recycled plastics in eco-efficient concrete.* Elsevier; 2019:9–37.
20. Khalid MY, Arif ZU, Ahmed W, Arshad H: **Recent trends in recycling and reusing techniques of different plastic polymers and their composite materials.** *Sustainable Materials and Technologies* 2021, e00382.
- Considering the circular economy concept, the authors discussed thermal and mechanical recycling in detail.
21. Das SK, Eshkalak SK, Chinnappan A, Ghosh R, Jayathilaka W, Baskar C, Ramakrishna S: **Plastic recycling of polyethylene terephthalate (PET) and polyhydroxybutyrate (PHB)—a comprehensive review.** *Materials Circular Economy* 2021, **3**: 1–22.
22. Shamsuyeva M, Endres H-J: **Plastics in the context of the circular economy and sustainable plastics recycling: comprehensive review on research development, standardization and market.** *Composites Part C: Open Access* 2021, **6**, 100168.
23. Lee A, Liew MS: **Tertiary recycling of plastics waste: an analysis of feedstock, chemical and biological degradation methods.** *J Mater Cycles Waste Manag* 2021, **23**:32–43.
24. Kho O, Hsien H: **LCA of plastic waste recovery into recycled materials.** *Energy and Fuels in Singapore* 2019, **145**:67.
25. Aryan Y, Yadav P, Samadder SR: **Life Cycle Assessment of the existing and proposed plastic waste management options in India: a case study.** *J Clean Prod* 2019, **211**:1268–1283.
26. Eriksen MK, Astrup TF: **Characterisation of source-separated, rigid plastic waste and evaluation of recycling initiatives: effects of product design and source-separation system.** *Waste Manag* 2019, **87**:161–172.
27. Kazemi M, Faisal Kabir S, Fini EH: **State of the art in recycling waste thermoplastics and thermosets and their applications in construction.** *Resour Conserv Recycl* 2021, **174**, 105776.
- The authors' highlighted the critical research parameters to facilitate the recycling of thermosets and thermoplastics to promote resource conservation and sustainability.
28. de Camargo RV, Saron C: **Mechanical–chemical recycling of low-density polyethylene waste with polypropylene.** *J Polym Environ* 2020, **28**:794–802.
29. Hama SM, Hilal NN: **Fresh properties of self-compacting concrete with plastic waste as partial replacement of sand.** *International Journal of Sustainable Built Environment* 2017, **6**:299–308.
30. Subramanian P: **Plastics recycling and waste management in the US.** *Resour Conserv Recycl* 2000, **28**:253–263.
31. Khalid F, Irwan J, Ibrahim MW, Othman N, Shahidan S: **Performance of plastic wastes in fiber-reinforced concrete beams.** *Construct Build Mater* 2018, **183**:451–464.
32. Henriksen ML, Karlsen CB, Klarskov P, Hinge M: **Plastic classification via in-line hyperspectral camera analysis and unsupervised machine learning.** *Vib Spectrosc* 2022, **118**, 103329.
33. Serranti S, Luciani V, Bonifazi G, Hu B, Rem PC: **An innovative recycling process to obtain pure polyethylene and polypropylene from household waste.** *Waste Manag* 2015, **35**:12–20.
34. Hunter RN, Self A, Read J, Hobson E. *The shell bitumen handbook*, vol. 514. UK: Ice Publishing London; 2015.
35. Tejaswini MSSR, Pathak P, Ramkrishna S, Ganesh PS: **A comprehensive review on integrative approach for sustainable management of plastic waste and its associated externalities.** *Sci Total Environ* 2022, **825**, 153973.
- The authors propose a sustainable plastic waste management (SPWM) model to convert plastic waste into resources and use it as a sustainable tool in urban mining.
36. Song X, Hu W, Huang W, Wang H, Yan S, Yu S, Liu F: **Methanolysis of polycarbonate into valuable product bisphenol A using choline chloride-based deep eutectic solvents as highly active catalysts.** *Chem Eng J* 2020, **388**, 124324.
37. Bae J-S, Oh S-K, Pedrycz W, Fu Z: **Design of fuzzy radial basis function neural network classifier based on information data preprocessing for recycling black plastic wastes: comparative studies of ATR FT-IR and Raman spectroscopy.** *Appl Intell* 2019, **49**:929–949.